


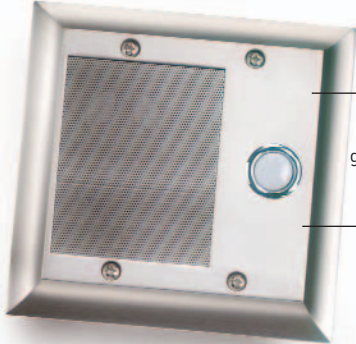
## CATEGORY 5 INTERCOM DOOR COMPONENTS



ICAIV2X

Automatically mutes any music playing through the audio system when the intercom is engaged.

Automatic operation which restores audio to its previous volume after 10 seconds.




F7641-BS

Available in both classic and modern finishes that are guaranteed to increase the curb appeal of any home.


Back lit button allows for easy operation at night.

## RELATED PRODUCTS



F7601

CATEGORY 5 INTERCOM DOOR CHIME




F7641-WH (WHITE)

CATEGORY 5 INTERCOM OUTDOOR/PATIO UNIT

## CATEGORY 5 INTERCOM DOOR COMPONENTS

PART #	DESCRIPTION	GANG BOX	RUNS OF CAT 5 CABLE
F7596-WH (White)	Category 5 Intercom Door Unit, Weather-Resistant	2	1
F7596-SB (Shiny Brass)	Category 5 Intercom Door Unit, Weather-Resistant	2	1
F7596-AB (Antique Brass)	Category 5 Intercom Door Unit, Weather-Resistant	2	1
F7596-BS (Brushed Stainless)	Category 5 Intercom Door Unit, Weather-Resistant	2	1
F7601	Category 5 Door Chime (3-note chime)	N/A	N/A
F7521-WH (White)	Intercom Exterior Mounting Box, 2-gang	N/A	N/A
F7521-IV (Ivory)	Intercom Exterior Mounting Box, 2-gang	N/A	N/A
F7641-WH (White)	Intercom Outdoor/Patio Unit, Weather-Resistant	2	1
F7641-SB (Shiny Brass)	Intercom Outdoor/Patio Unit, Weather-Resistant	2	1
F7641-AB (Antique Brass)	Intercom Outdoor/Patio Unit, Weather-Resistant	2	1
F7641-BS (Brushed Stainless)	Intercom Outdoor/Patio Unit, Weather-Resistant	2	1
ICAIV2X	Category 5 Intercom Audio Interrupt Module	N/A	N/A

## TIPS & TECHNOLOGY: CATEGORY 5 INTERCOM APPLICATION

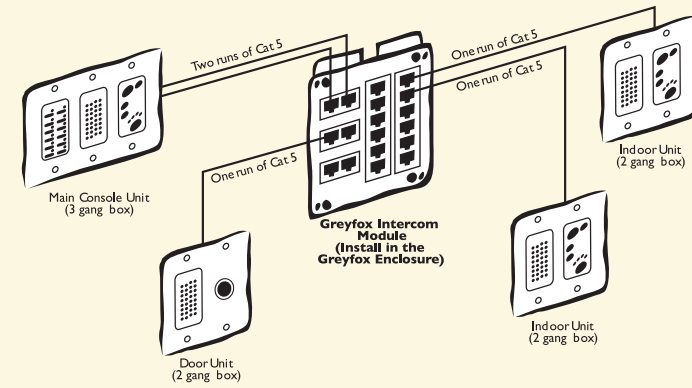

Two runs of Cat 5

One run of Cat 5

One run of Cat 5

One run of Cat 5

Main Console Unit (3 gang box)

Greyfox Intercom Module (Install in the Greyfox Enclosure)

Indoor Unit (2 gang box)

Door Unit (2 gang box)

Indoor Unit (2 gang box)

### Category 5 Intercom System

- Run a single Cat 5 cable to any location where a Room or Door Unit will be installed.
- Run two Cat 5 cables to the location where the Main Console Unit will be installed.
- Use the appropriate size gang box for the type of unit to be installed.
- All cabling needs to home run back to the Intercom Module which resides in the On-Q enclosure.