
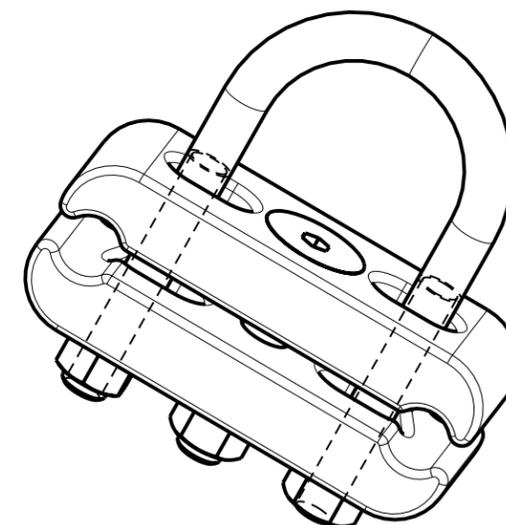


DRAWING NO.
30003709

REV	DATE	DESCRIPTION	ECO	BY	C'H'K.
A	7/22/2010 8:00:00 PM	DRAWING UPDATED AS PER MARKUP	21668	DK	MA

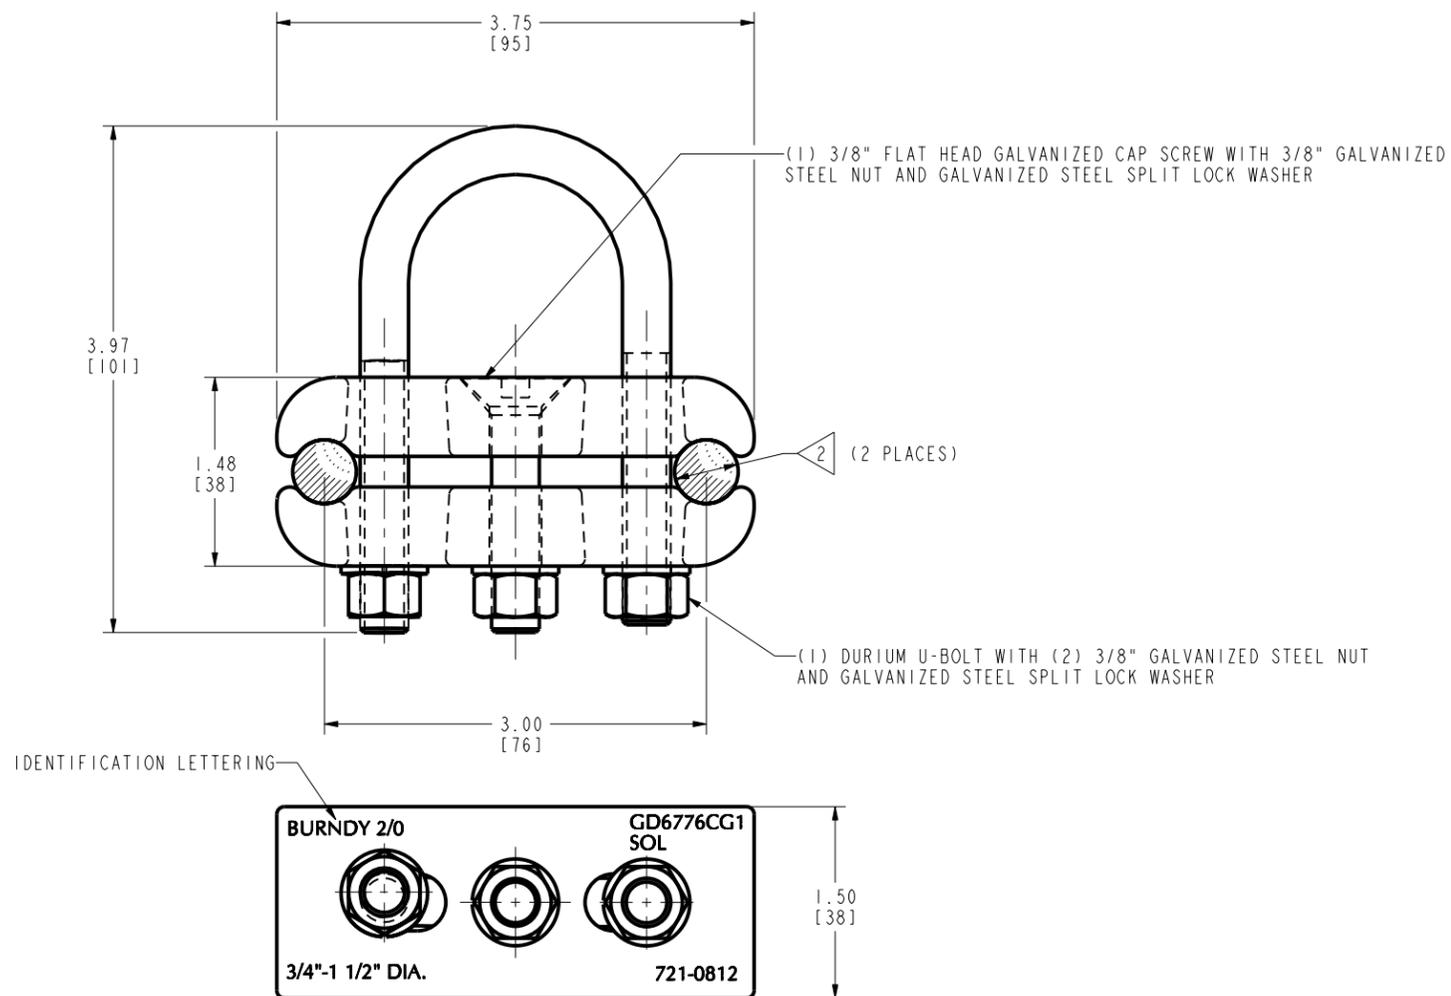

ISOMETRIC VIEW

NOTES:

- MATERIAL:
BODY & CAP: CAST COPPER ALLOY
- ACCOMMODATES: 3/4" (0.750 [19] DIA.) TO 1 1/2" (1.500 [38] DIA.) CABLES WITH #2/0 (.365) COPPER STIFFENERS.
- NOMINAL INSTALLATION TORQUE:
240 IN LBS [30 Nm] FOR 3/8" GALVANIZED STEEL HARDWARE.
- UL 467 LISTED, FILE NO. E9999. ACCEPTABLE FOR DIRECT BURIAL.
- SUITABLE FOR BURIAL IN GROUND OR CONCRETE.
- DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS, ROUNDED OFF TO NEAREST MILLIMETER, UNLESS OTHERWISE NOTED, AND ARE FOR REFERENCE ONLY.

TO ORDER BURNDY® PRODUCTS CALL		TRUSS STIFFENERS	
UNITED STATES 1-800-346-4175 (LONDONDERRY, NH)		ITEM NO: 10046979	SCALE: 1:1
CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES)		CAT. NO: GD6776CG1	REV
FOR PRODUCT INFO: http://www.burndy.com		DRAWN BY: NJ SUDHAKAR 06/24/10	
		CHECKER: V ANAND 06/24/10	
		DSN APPVL: --	
		MFG APPVL: --	
		QA APPVL: --	
		MKT APPVL: --	
		PROJ #:	
		SIZE: D	
		DRAWING NO: 30003709	
		REL LEVEL: Released	
		SHEET 1 OF 1	A

REV: PE0200