


TriLyte FH4 Narrow Body Series

Features

- Efficiency 83.4%
- Riveted 20 gauge chassis for superior strength
- Venting on sides allow for cooler operation
- Frameless wireguard design (See Options)
- Surface, stem or chain mounting options
- Contoured mirrored reflector for optimum efficiency
- Slim profile of 2 3/4" depth ideal for gymnasium applications where ceiling height may be an issue
- Optional wireguard protects lamps in gymnasium applications
- Occupancy Sensor for energy saving solutions (See Options)
- Ideal for Trade/Retail, Recreational and Industrial applications where efficiency and lighting control are required



Dimensions

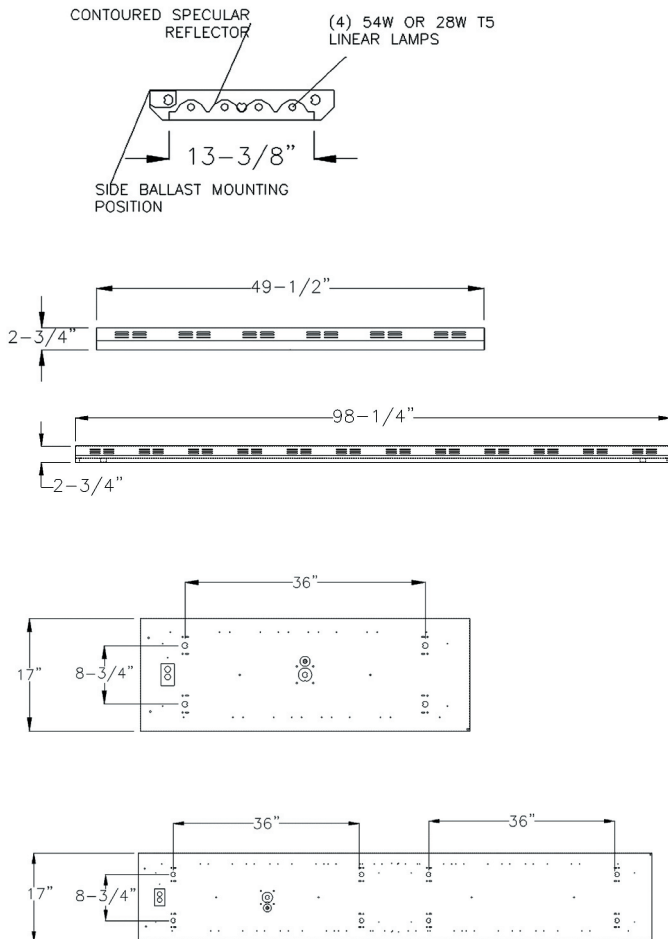

Features



- * Contoured reflector technically designed to optimize lamp performance
- * Self contained line voltage sensor. Specifically designed to mount via the the 7/8" KO provided on either end of the TriLyte fixture. (Field Installed)
Cat no. FH360



- * Vented details on housing profile allows for efficient running temperatures during operation

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Volts/Ballast:	

CFI Fluorescent - A Canlyte Brand

www.canlyte.com

Technical Information: (613) 938-6221 • Fax (613) 938-9576

525 Education Road, Cornwall, ON K6H 6C7

We reserve the right to change details of design, materials and finish.

Copyright 2005 Lightolier

Folio RF-0222-06

CFI FLUORESCENT

