



# PAR38 LED

## 12PAR38/LED/840/F40/DIM/ULW/120V 6/1FB

Philips PAR38 LED Single Optic Lamps with AirFlux Technology improves shopping experience with superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

### Product data

General Information	
Cap-Base	E26 [ Single Contact Medium Screw]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	25000X
Technical Type	12-90W

Light Technical	
Color Code	840 [ CCT of 4000K]
Beam Angle (Nom)	40 °
Luminous Flux (Nom)	900 lm
Luminous Flux (Rated) (Nom)	900 lm
Luminous Intensity (Nom)	1900 cd
Color Designation	Cool White (CW)
Rated Beam Angle	40 °
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	75.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	12 W
Lamp Current (Nom)	112 mA

Wattage Equivalent	90 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.8
Voltage (Nom)	120 V

Temperature	
T-Case Maximum (Nom)	66 °C

Controls and Dimming	
Dimmable	Yes

Approval and Application	
Suitable For Accent Lighting	Yes


Product Data	
Order product name	12PAR38/LED/840/F40/DIM/ULW/120V 6/1FB
EAN/UPC - Product	046677529680
Order code	929001320204
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001320204
Net Weight (Piece)	0.385 kg

# PAR38 LED

## Warnings and Safety

- Suitable for use in damp locations.
- Not for use in totally enclosed luminaires.
- CAUTION: Risk of electric shock - do not use where directly exposed to water.
- NOTES: This device complies with Part 18 of the FCC rule. This product may cause interference with other devices. If interference occurs, change the location of the products involved. This RFLD device complies with Canadian ICES-005


## Dimensional drawing




Classic PAR38 120V 11-90W 900lm 40D 4000

Product	D	C
12PAR38/LED/840/F40/DIM/ULW/120V 6/1FB	122 mm	134 mm

## Photometric data




12-90W E26 PAR38 40D 840 4000K



12-90W E26 PAR38 40D 840 4000K


# PAR38 LED

## Photometric data

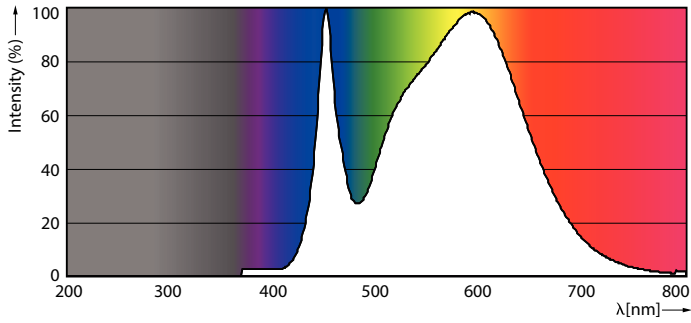


12-90W E26 PAR38

## Lifetime

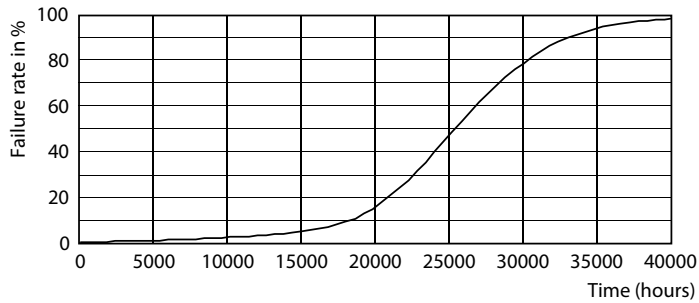

14-120W E26 PAR38

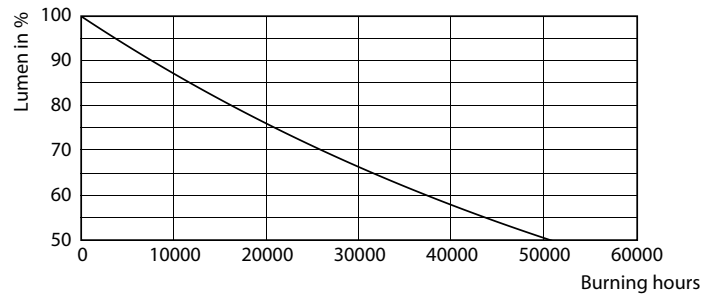

14-120W E26 PAR38

