EPANL Series
Fully-Luminous LED Flat Panel

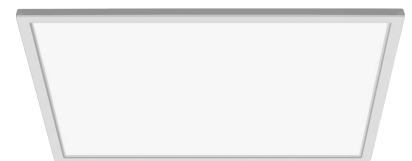## Option-Rich Panel for Multiple Applications

The EPANL LED flat panel by Lithonia Lighting® is a sleek, low-profile luminaire that is fully luminous across the lens. EPANL provides a glare-free lighting solution that creates a visually comfortable environment and allows you to customize your lighting for the space or task with multiple dimming options. With the EPANL luminaire's shallow depth of only 2 1/2 inches, restrictive plenum space is no longer a concern and the lightweight fixture is simple to install.

The EPANL luminaire's extensive lumen offering and versatile mounting and control options make it a perfect choice for many applications including schools, offices, healthcare facilities, retail and other commercial spaces.
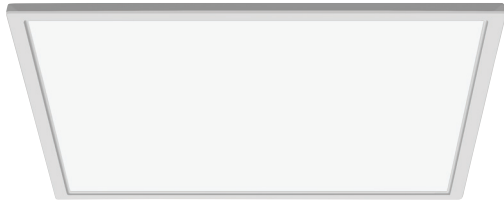
Key Features:

- Lumen output options include:
  - 2' x 2' - 2000L, 3400L, 4000L, 4800L
  - 2' x 4' - 3000L, 4000L, 4800L, 5400L, 6000L, 6800L
  - 1' x 4' - 1500L, 3000L, 4000L, 4800L, 6000L
- Color temperature options available: 3500K, 4000K, 5000K
- 0-10V driver that dims to 10% or 1%
- Streamlined, ultra-thin design with a depth of just 2 1/2 inches
- Superior frame design—no light leakage
- Surface mount and suspension mounting kit options available*
- Optional nLight® control solutions*
- Emergency driver options*
- Pre-wire whips*

*Refer to the configurable Spec Sheet on the product web page for ordering information.

Commercial Indoor
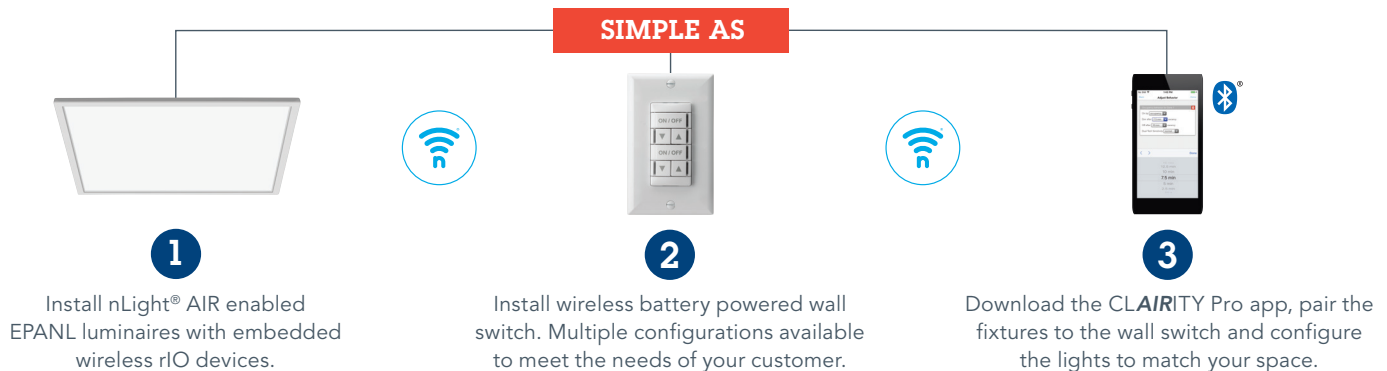
EPANL Series LED Luminaire

Integration with nLight® AIR Networked Lighting Controls

nLight AIR wireless lighting controls are a smart solution that aids in energy code compliance and simplifies lighting configuration. With a full portfolio of control and network devices, nLight AIR helps reduce total install time with fewer devices, no new wiring and the easy-to-use CLAIRITY™ Pro mobile app to streamline start-ups.

nLight® AIR Benefits

- Offers both indoor and outdoor options for a holistic lighting network solution
- Aids in meeting and/or exceeding state and local energy codes for renovation and new construction projects
- Saves energy with occupancy and daylight sensing, automated timeclock and native demand response
- Robust 5-tier wireless security architecture

SIMPLE AS

1
Install nLight® AIR enabled EPANL luminaires with embedded wireless rIO devices.

2
Install wireless battery powered wall switch. Multiple configurations available to meet the needs of your customer.

3
Download the CLAIRITY Pro app, pair the fixtures to the wall switch and configure the lights to match your space.

Accessories: Order as separate catalog number

2x2SMKSH	2' x 2' Surface Mount Kit
2x4SMKSH	2' x 4' Surface Mount Kit
1x4SMKSH	1' x 4' Surface Mount Kit

1X4SMKSH

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

AcuityBrands.