





Shown actual size: Maestro dimmer and 1-gang Claro wallplate in White (WH).








### Product family features

- True multi-location dimming from every location
- Tap on to favorite level; tap off; tap twice for full on
- Touch rocker to adjust light level
- LEDs indicate light level and glow softly in the dark as a locator light
- Delayed off provides light as you exit the room
- Line frequency compensation maintains stable light levels, despite power line frequency and voltage variations
- Programming allows customized functions
- **eco-dim®**, **eco-minder™** and **eco-timer** models available
- Mechanical air-gap to disconnect load power
- 100% factory tested
- Coordinating Claro®, Satin Colors® and Stainless Steel wallplates only available separately
- Custom engraving available for wallplates, see pg. 155

### Control types

-  Single-pole (one location)
-  Multi-location dimming from every location (up to ten locations)

### Direct load type compatibility

-  Incandescent/halogen lighting
-  Magnetic low-voltage lighting
-  Electronic low-voltage lighting
-  Fluorescent lighting
-  LED lighting
-  Ceiling fans
-  Ceiling fan/lights

### Load type requiring load interface

Lighting load interfaces may be applicable for some load type, voltage and capacity combinations.

For additional information, see pg. 174.

**Available finishes**

Use **BOLD** color code in model number (Example: MA-600-**BR**)

Gloss finishes\*



**WH**  
White



**LA**  
Light Almond



**AL**  
Almond



**IV**  
Ivory



**GR**  
Gray



**BR**  
Brown



**BL**  
Black

Satin finishes\*



**SW**  
Snow



**LS**  
Limestone



**BI**  
Biscuit



**ES**  
Eggshell



**PD**  
Palladium



**TP**  
Taupe



**ST**  
Stone



**BG**  
Bluestone



**PL**  
Plum



**SG**  
Sea Glass



**TQ**  
Turquoise



**GS**  
Goldstone



**DS**  
Desert Stone



**GB**  
Greenbriar



**MS**  
Mocha Stone



**TC**  
Terracotta



**SI**  
Sienna



**HT**  
Hot



**MR**  
Merlot



**MN**  
Midnight



**SS**  
Stainless Steel

\*Coordinating wallplates only available separately. For wallplate information, see pg. 160.

Stainless Steel wallplate includes black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls.

## Dimmers and switches

### Digital fade dimmers



- Tap on to favorite level; tap off
- Tap twice for full on
- Press, hold and release for delayed fade-to-off
- Touch rocker to adjust light level
- Provides true dimming from each location (with companion dimmers)
- **eco-dim®** model guarantees at least 15% energy savings compared to a standard switch
- **eco-minder™** green LED demonstrates 15% or more energy savings compared to a standard switch
- Dimmer advanced programming features available



eco-minder™

### Digital switches



- For multi-location switching, use one Maestro multi-location switch with Maestro companion switches
- Tap switch on/off

## Timers

### Countdown timer switches (5–60 minutes/full on)



- Use with exhaust fans to reduce moisture, mold and mildew in bathrooms and kitchens
- Use with lighting
- Tap on to start timer; tap off
- Tap twice for untimed on
- Touch rocker to adjust countdown time
- One minute warning before lights/fan go off
- Top LED is full on with no timer action
- Timer advanced programming features available
- Multi-location control with companion switch


### Countdown eco-timer switch (30 minutes)



- Use with exhaust fans to reduce moisture, mold and mildew in bathrooms and kitchens
- Use with lighting
- Tap on to start timer; tap off
- Touch rocker to adjust countdown time
- One minute warning before lights/fan go off
- **Timer always turns off**
- Single-location only
- Timer advanced programming features available

## Dual devices

### Dual dimmers (two loads)



#### Dimmers (top/bottom)

- Replacement for stacked switches
- Tap on to favorite light level; tap off
- Tap twice for full on
- Touch rocker to adjust light level
- Single-location only
- Dimmer advanced programming features available

### Dual dimmer/countdown timer switch (two loads)



#### Dimmer (top)

- Tap on to favorite light level; tap off
- Tap twice for full on
- Touch rocker to adjust light level
- Dimmer advanced programming features available

#### Timer switch (bottom)

- Tap on to start timer; tap off
- Tap twice for untimed on
- Touch rocker to adjust countdown time from 5–60 minutes
- One minute warning before lights go off
- Top LED is full on with no timer action
- Single-location only
- Timer advanced programming features available

### Dual dimmer/switch (two loads)



#### Dimmer (top)

- Replacement for stacked switches
- Tap on to favorite light level; tap off
- Tap twice for full on
- Touch rocker to adjust light level
- Dimmer advanced programming features available

#### Switch (bottom)

- Tap switch on/off
- Single-location only

### Advanced programming features include:

#### Dimmer advanced programming features

- Adjusting fade on/ fade off time
- Locked preset lighting level

#### Timer advanced programming features

- Bypass timer option
- Locked preset lighting level

#### Sensor advanced programming features

- Adjust timeout duration
- Off warning feature (dimmer with occupancy and/or vacancy sensor only)
- Sensor sensitivity
- Auto-on feature (occupancy models only)

Maestro advanced programming manual (Application Note #124) is available at [www.lutron.com/applicationnotes](http://www.lutron.com/applicationnotes).

## Dimmers and switches with sensors\*

### Dimmers with occupancy/vacancy sensor



#### Dimmer (top)

- Tap on to favorite light level; tap off
- Tap twice for full on
- Touch rocker to adjust light level
- Works with up to nine companion dimmers (MA-R-)
- Dimmer advanced programming features available, see pg. 49

#### Sensor (bottom)

- Turns lights off to save energy when no one is in the room
- Vacancy models meet California Title 24 Section 119(j) requirements. Lights are turned on manually and off by the sensor.
- 180° field of view motion sensor
- Sensor advanced programming features available, see pg. 49

### Switches with occupancy/vacancy sensor



#### Switch (top)

- Tap switch on/off
- Works with up to nine companion switches (MA-AS-)

#### Sensor (bottom)

- Turns lights off to save energy when no one is in the room
- Vacancy models meet California Title 24 Section 119(j) requirements. Lights are turned on manually and off by the sensor.
- 180° field of view motion sensor
- Sensor advanced programming features available, see pg. 49

## Companion dimmers and switches

### Companion dimmers



- For true multi-location dimming from every location, use up to nine companion dimmers with only one Maestro® multi-location dimmer
- Use standard single-pole and 3-way wiring

### Companion switches



- For use with multi-location switches, use up to nine Maestro companion switches with one Maestro multi-location switch
- Can be used with multi-location countdown timer switch
- Use standard single-pole and 3-way wiring

\*For more information on Maestro dimmers and switches with occupancy/vacancy sensor, see pg. 140.

## Fan and fan/light controls

### Digital fan controls



- Multi-location, fan only
- Controls up to four fans
- One canopy module included, order one canopy module (CM-FQ1) for each additional fan controlled, see pg. 57
- 7-quiet fan speeds, plus off
- Designed to prevent motor hum

### Fan/light controls



#### Dimmer (top)

- Tap on to favorite light level; tap off
- Tap twice for full on
- Touch rocker to adjust light level

#### Fan control (bottom)

- Tap on to favorite fan speed; tap off
- Touch rocker to adjust fan speed
- 7-quiet fan speeds, plus off, provide enhanced comfort
- Designed to prevent motor hum

### Canopy modules (fan mounted)



- For use only in multi-fan applications with MA-FQ4FM, see pg. 57
- Order one canopy module for each additional fan controlled
- Use up to three additional fan-mounted canopy modules for up to four fans total (controlled as one group)

## Companion fan and fan/light controls

### Companion fan controls



- For use with multi-location control, use up to two companion fan controls with one Maestro digital fan control


### Companion fan/light controls



- For use with multi-location control, use up to two companion controls with one Maestro multi-location fan/light control


**Connections overview**

**Load connections\***

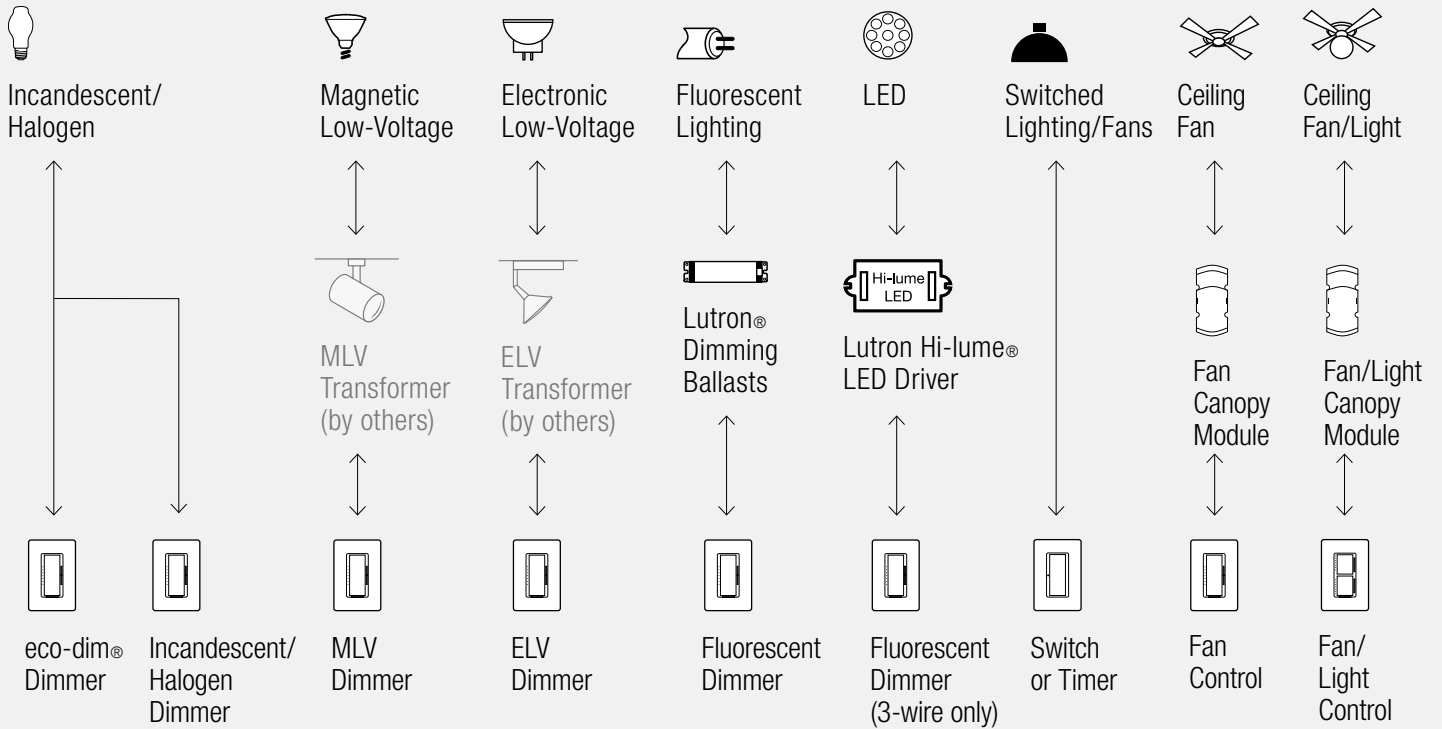


**Control types (for 2 or more locations)**


**Dim from multiple-locations (up to 10)**

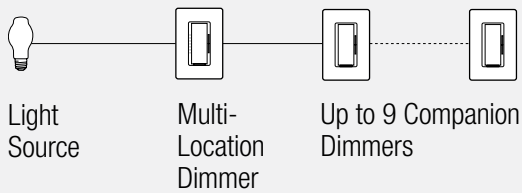


**Switch from multiple-locations (up to 10)**

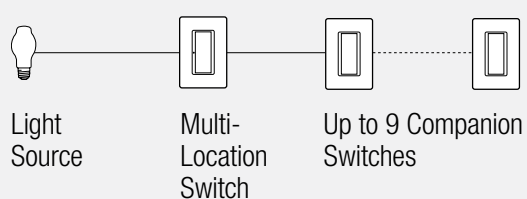

**Fan control from up to 3 locations**

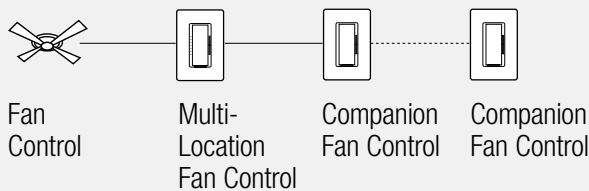

**Fan/light control from up to 3 locations**

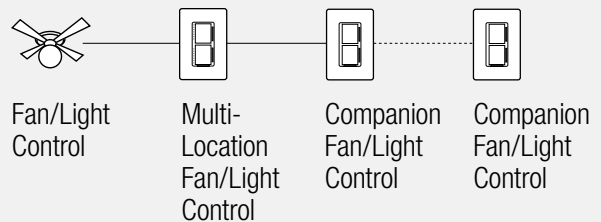

For more information on ballasts, visit [www.lutron.com/ballasts](http://www.lutron.com/ballasts).  
 For more information on LED drivers, visit [www.lutron.com/LED](http://www.lutron.com/LED).

**\*For illustration purposes only.** Consult model number pages for specific voltage and capacity information.

### Dimmer model numbers

#### Incandescent/halogen dimmers\*\*

##### Digital fade dimmers

Multi-location/single-pole 120V 600W	MA-600- <b>CC</b> <sup>3</sup>
Multi-location/single-pole 120V 600W	MSC-600M- <b>CC</b> <sup>4</sup>
Multi-location/single-pole 120V 1000W	MA-1000- <b>CC</b> <sup>3</sup>
Multi-location/single-pole 120V 1000W	MSC-1000M- <b>CC</b> <sup>4</sup>

##### eco-dim® digital fade dimmer\*\*

Multi-location/single-pole 120V 600W	MA-600G- <b>EE</b> <sup>2</sup>
---	---------------------------------

eco-dim model guarantees at least 15% energy savings and triples lamp life compared to a standard switch.

##### eco-minder™ digital fade dimmer\*\*

Multi-location/single-pole 120V 600W	MA-600I- <b>EE</b> <sup>2</sup>
---	---------------------------------

eco-minder green LED lights demonstrate 15% or more energy savings compared to a standard switch.

#### Magnetic low-voltage dimmers\*\*

##### Digital fade dimmers

Multi-location/single-pole 120V 600VA (450W)	MALV-600- <b>CC</b> <sup>3</sup>
Multi-location/single-pole 120V 600VA (450W)	MSCLV-600M- <b>CC</b> <sup>4</sup>
Multi-location/single-pole 120V 1000VA (800W)	MALV-1000- <b>CC</b> <sup>3</sup>
Multi-location/single-pole 120V 1000VA (800W)	MSCLV-1000M- <b>CC</b> <sup>4</sup>

The stated VA (Volt-Ampere) rating includes the magnetic transformer heat losses and the lamp load. The stated W (Watt) rating is the maximum lamp wattage based on assumed 20% transformer loss.

#### Electronic low-voltage dimmers\*

##### Digital fade dimmers

Multi-location/single-pole 120V 600W	MAELV-600- <b>CC</b> <sup>3</sup>
Multi-location/single-pole 120V 600W	MSCELV-600M- <b>CC</b> <sup>4</sup>

Only certain LED drivers are dimmable using an ELV dimmer, for more information visit [www.lutron.com/LED](http://www.lutron.com/LED).

**CC**<sup>3</sup>: Gloss color codes, see pg. 47  
**CC**<sup>4</sup>: Satin color codes, see pg. 47  
**EE**<sup>2</sup>: Available in White (WH), Ivory (IV), Almond (AL) and Light Almond (LA)  
 (Wallplates not included with above, order separately, see pg. 160)

All models must be derated if ganged unless otherwise noted, see pg. 170.

\*Requires neutral wire connection.

\*\*Minimum load is 40W/VA.



### Dimmer model numbers

#### 3-wire fluorescent dimmers\*

##### Digital fade dimmers (two loads)

Multi-location/single-pole 120V 6A	MAF-6AM- <b>CC</b> <sup>3</sup>
Multi-location/single-pole 120V 6A	MSCF-6AM- <b>CC</b> <sup>4</sup>
Multi-location/single-pole 277V 6A	MAF-6AM-277- <b>CC</b> <sup>3</sup>
Multi-location/single-pole 277V 6A	MSCF-6AM-277- <b>CC</b> <sup>4</sup>

For use with Hi-lume®, Hi-lume® Compact SE, Hi-lume® 3D, Eco-10®, EcoSystem® ballasts.

Fixed low-end trim (non-adjustable).

#### Hi-lume® LED drivers: 3-wire fluorescent dimmers\*

##### Digital fade dimmers

Multi-location/single-pole 120V 6A	MAF-6AM- <b>CC</b> <sup>3</sup>
Multi-location/single-pole 120V 6A	MSCF-6AM- <b>CC</b> <sup>4</sup>
Multi-location/single-pole 277V 6A	MAF-6AM-277- <b>CC</b> <sup>3</sup>
Multi-location/single-pole 277V 6A	MSCF-6AM-277- <b>CC</b> <sup>4</sup>

For use with Hi-lume LED driver only.

For more information on Hi-lume LED drivers, visit [www.lutron.com/HilumeLED](http://www.lutron.com/HilumeLED).

Fixed low-end trim (non-adjustable).

### Dimmers and switches with sensor model numbers

#### Incandescent/halogen dimmers with occupancy/vacancy sensor

##### Digital fade dimmer with occupancy/vacancy sensor\*\*

Multi-location/single-pole 120V 600W	MS-OP600M- <b>CC</b> <sup>1</sup>
---	-----------------------------------

##### Digital fade dimmer with vacancy only sensor

Multi-location/single-pole 120V 600W	MS-VP600M- <b>CC</b> <sup>1</sup>
---	-----------------------------------

Not for use with mechanical 3-way or 4-way switches.

#### Switches with occupancy/vacancy sensor

##### Digital switch with occupancy/vacancy sensor\*

Multi-location/single-pole 120V 5A	MS-OPS5AM- <b>CC</b> <sup>1</sup>
---------------------------------------	-----------------------------------

Rated for: incandescent/halogen, magnetic low-voltage, electronic low-voltage, non-dim fluorescent ballasts, non-dim LED drivers.

##### Digital switch with vacancy only sensor\*

Multi-location/single-pole 120V 5A	MS-VPS5AM- <b>CC</b> <sup>1</sup>
---------------------------------------	-----------------------------------

Rated for: incandescent/halogen, magnetic low-voltage, electronic low-voltage, non-dim fluorescent ballasts, non-dim LED drivers.

**CC**<sup>1</sup>: Gloss and Satin color codes, see pg. 47

**CC**<sup>3</sup>: Gloss color codes, see pg. 47

**CC**<sup>4</sup>: Satin color codes, see pg. 47

(Wallplates not included with above, order separately, see pg. 160)

For more information on Lutron ballasts, visit [www.lutron.com/ballasts](http://www.lutron.com/ballasts).

All models must be derated if ganged unless otherwise noted, see pg. 170.

\*Requires neutral wire connection.

\*\*Minimum load is 40W/VA.

### Switch model numbers

#### Switches

##### Digital switches

Multi-location/single-pole\* MA-S8AM-**CC**<sup>3</sup>  
120V 8A light or 3A fan

Multi-location/single-pole\* MSC-S8AM-**CC**<sup>4</sup>  
120V 8A light or 3A fan

Rated for: incandescent/halogen, magnetic low-voltage, electronic low-voltage, non-dim fluorescent ballasts, general purpose fans and most non-dim LED drivers.

Multi-location/single-pole\* MSCF-S6AM-277-**CC**<sup>4</sup>  
277V 6A light

Multi-location/single-pole\* MAF-S6AM-277-**CC**<sup>3</sup>  
277V 6A light

Rated for: incandescent/halogen, magnetic low-voltage, electronic low-voltage, non-dim fluorescent ballasts and most non-dim LED drivers.

### Timer model numbers

#### Timers

##### Countdown timer control switch (5–60 minutes/full on)\*\*

Single-pole, no neutral required MA-T51-**CC**<sup>1</sup>  
120V 600W/VA (5A) on/off lighting load  
(incandescent/halogen, MLV)  
OR 3A general purpose fan(s)

Multi-location/single-pole\* MA-T51MN-**CC**<sup>1</sup>  
120V 600W/VA (5A) on/off lighting load  
(incandescent/halogen, MLV, ELV, fluorescent)  
OR 3A general purpose fan(s)

Use MA-T51MN- with a companion switch (MA-AS- or MSC-AS-) for multi-location switching.

##### Countdown eco-timer control switch (30 minutes/full on)\*\*

Single-pole MA-T530G-**EE**<sup>2</sup>  
120V 600W/VA (5A) on/off lighting load  
(incandescent/halogen, MLV)  
OR 3A general purpose fan(s)

**CC**<sup>1</sup>: Gloss and Satin color codes, see pg. 47

**CC**<sup>3</sup>: Gloss color codes, see pg. 47

**CC**<sup>4</sup>: Satin color codes, see pg. 47

**EE**<sup>2</sup>: Available in White (WH), Ivory (IV), Almond (AL) and Light Almond (LA)

(Wallplates not included with above, order separately, see pg. 160)

All models must be derated if ganged unless otherwise noted, see pg. 170.

\*Requires neutral wire connection.

\*\*Minimum load is 40W/VA.

**Dual device model numbers**

 **Incandescent/halogen dimmer  
and Incandescent/halogen dimmer\*\***

**Dual dimmers**

Single-pole	MA-L3L3- <b>CC</b> <sup>1</sup>
120V 300W light (top)	
Incandescent/halogen	
120V 300W light (bottom)	
Incandescent/halogen	

 **Incandescent/halogen dimmer  
and switch\*\***

**Dual dimmer/switch**

Single-pole	MA-L3S25- <b>CC</b> <sup>1</sup>
120V 300W light (top)	
Incandescent/halogen	
2.5A switch (bottom)	
Lighting load and/or general purpose fan(s)	

 **Incandescent/halogen dimmer  
and timer switch\*\***

**Dual dimmer/timer switch**

Single-pole	MA-L3T251- <b>CC</b> <sup>1</sup>
120V 300W light (top)	
Incandescent/halogen	
2.5A timer switch (bottom)	
Lighting load and/or general purpose fan(s)	

**Companion control model numbers**

**Companion controls**

**Companion dimmers**

Companion dimmer	MA-R- <b>CC</b> <sup>3</sup>
120V	MSC-AD- <b>CC</b> <sup>4</sup>
Companion dimmer	MA-R-277- <b>CC</b> <sup>3</sup>
277V	MSC-AD-277- <b>CC</b> <sup>4</sup>

No derating required if ganged.

**Companion switches**

Companion switch	MA-AS- <b>CC</b> <sup>3</sup>
120V	
Companion switch	MSC-AS- <b>CC</b> <sup>4</sup>
120V	
Companion switch	MA-AS-277- <b>CC</b> <sup>3</sup>
277V	
Companion switch	MSC-AS-277- <b>CC</b> <sup>4</sup>
277V	

No derating required if ganged.

**CC**<sup>1</sup>: Gloss and Satin color codes, see pg. 47  
**CC**<sup>3</sup>: Gloss color codes, see pg. 47  
**CC**<sup>4</sup>: Satin color codes, see pg. 47  
 (Wallplates not included with above, order separately, see pg. 160)

All models must be derated if ganged unless otherwise noted, see pg. 170.

\*\*Minimum load is 40W/VA.

**Fan control and fan/light control  
model numbers**

**✂ Fan controls**

**Digital fan controls—quiet 7-speed**

Multi-location	MA-FQ4FM- <b>CC</b> <sup>1</sup>
120V, up to 4 canopy modules (1 A each)	

Multi-location package	MA-FQ3- <b>CC</b> <sup>1</sup>
120V, up to 4 canopy modules (1 A each)	

All above include one wall-mounted fan control and one fan-mounted canopy module. Wallplates sold separately.

Multi-location package (MA-FQ3-) also includes companion fan control (MA-AFQ4). Wallplates sold separately.

No derating required if ganged.

**Canopy modules (fan-mounted)**

Canopy module	CM-FQ1
120V 1 A	

All Maestro fan controls and fan/light controls include one canopy module for control of one fan. One additional canopy module (CM-FQ1) required for each additional fan—up to one fan total.

**✂ Fan/light controls**

**Fan/light control—quiet 7-speed**

Single-pole	MA-LFQHW- <b>CC</b> <sup>3</sup>
120V 300W light (top)	

Incandescent/halogen	
1 canopy module for up to 1 A fan (bottom)	

Multi-location	MA-LFQM- <b>CC</b> <sup>1</sup>
120V 300W light (top)	

Incandescent/halogen	
1 canopy module for up to 1 A fan (bottom)	

All above include the necessary wall-mounted fan/light control and one fan-mounted canopy module.

Single-pole model includes wallplate.

Multi-location model may be used with up to two companion fan/light controls (MA-ALFQ35-), see pg. 66. Wallplates sold separately.

No derating required if ganged.

**CC**<sup>1</sup>: Gloss and Satin color codes, see pg. 47  
(Wallplates not included with above, order separately, see pg. 160)

**CC**<sup>3</sup>: Gloss color codes, see pg. 47

All models must be derated if ganged unless otherwise noted, see pg. 170.

### Companion fan and fan/light control model numbers

#### Companion fan control

---

Companion fan control	MA-AFQ4- <b>CC</b> <sup>1</sup>
-----------------------	---------------------------------

---

120V

Use up to two wall-mounted companion fan controls with one MIR-FQ4FMT- or MIR-FQ4FM- for multi-location fan control.

No derating required if ganged.

#### Companion fan/light control

---

Companion fan/light control	MA-ALFQ35- <b>CC</b> <sup>1</sup>
-----------------------------	-----------------------------------

---

120V

Use up to two wall-mounted controls with only one Maestro multi-location fan/light control.


No derating required if ganged.

**CC**<sup>1</sup>: Gloss and Satin color codes, see pg. 47  
(Wallplates not included, order separately,  
see pg. 160)

All models must be derated if ganged unless  
otherwise noted, see pg. 170.

## Accessories

### Wallplates

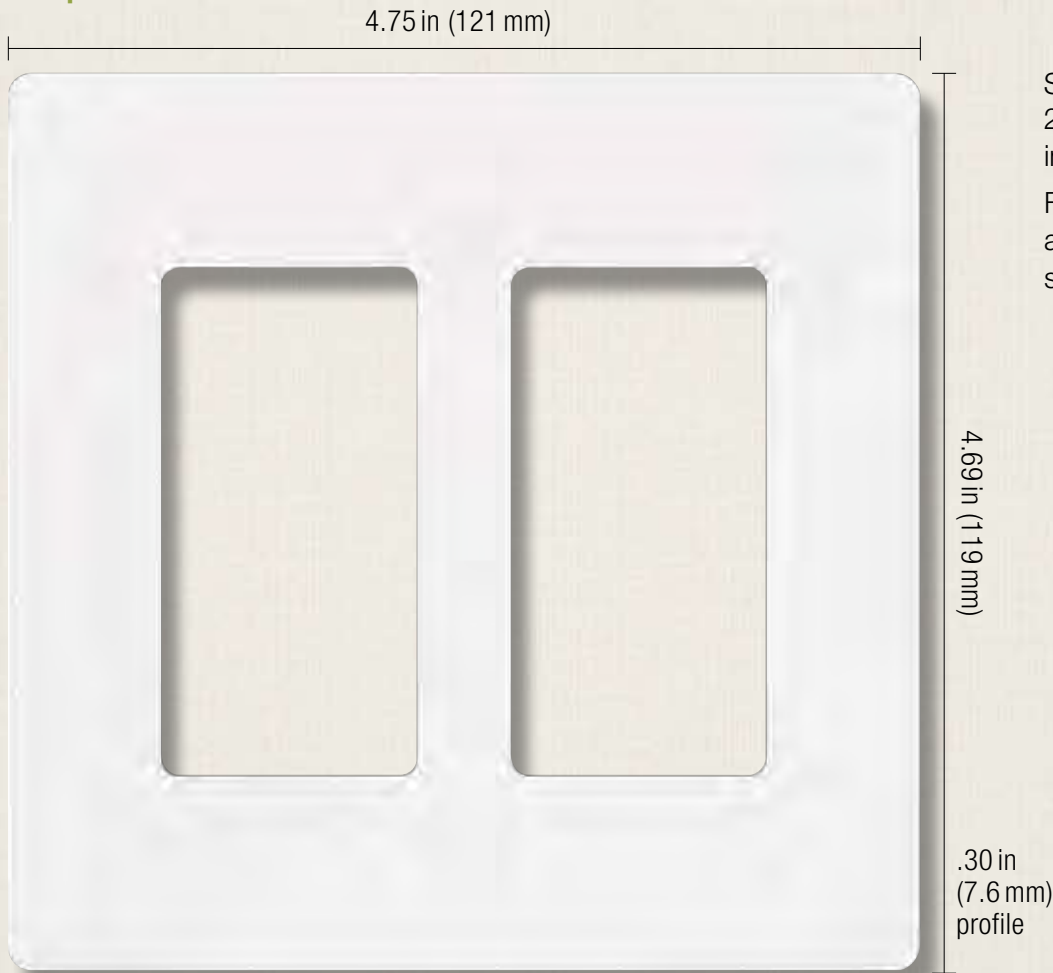

Shown actual size:  
2-gang Claro® wallplate  
in White (WH).

For more information  
about Designer wallplates,  
see pg. 160.

### Coordinated electrical devices



Tamper resistant  
GFCI receptacle




Customizable  
6-port frame



Cable jack

For more information  
about coordinated  
Designer electrical  
devices, see pg. 163.

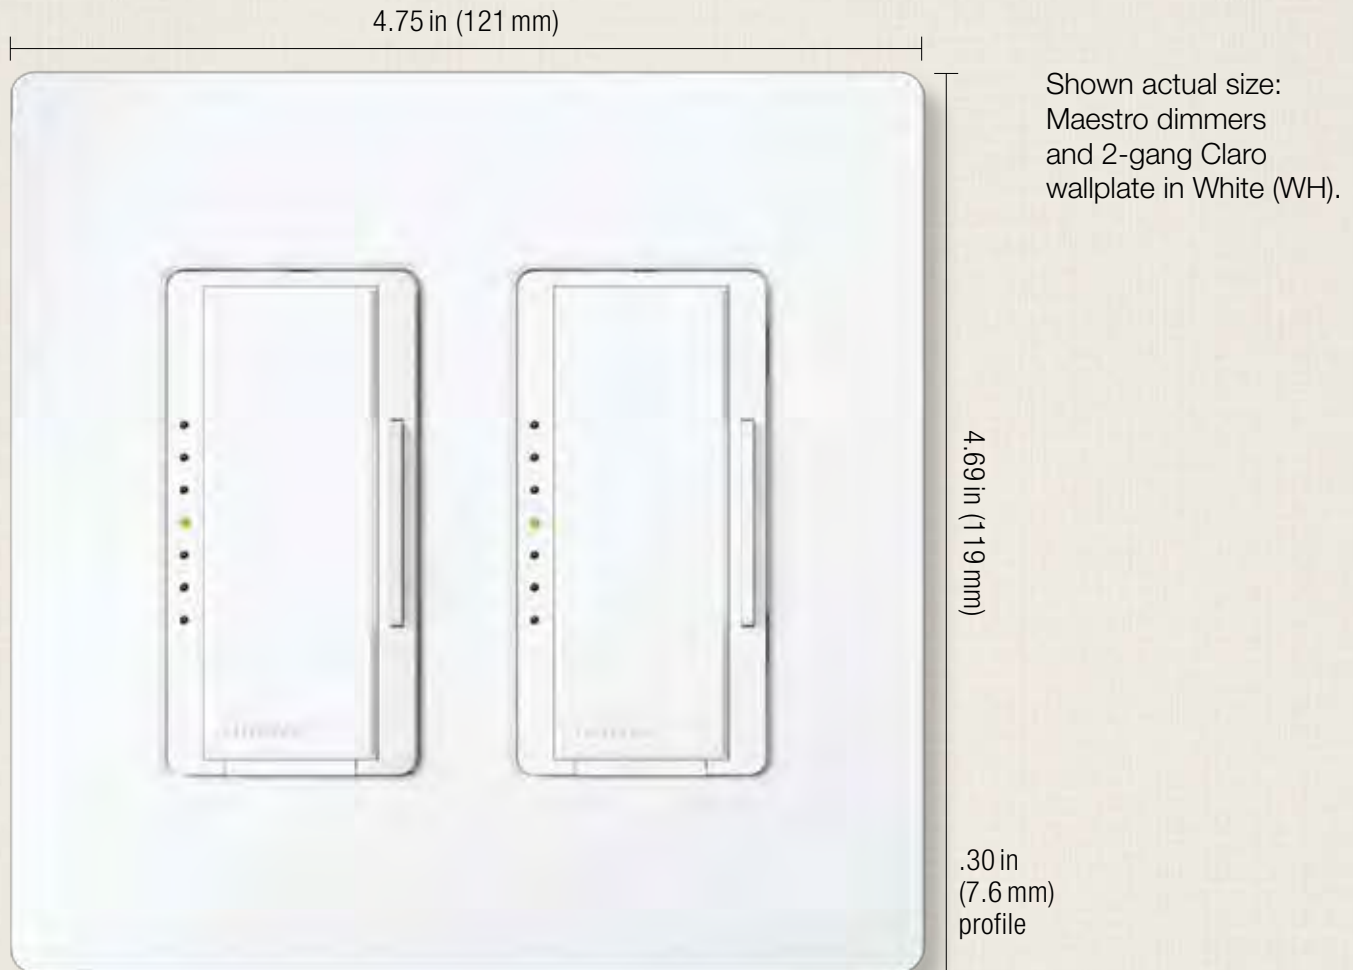

### Product family features

- Can be used in conjunction with the following dimmer(s) and switch(es): Maestro®, Maestro IR®, Maestro Wireless®, Pico™ wireless control, Spacer System®, Diva®, Lyneo® Lx, Skylark®, Skylark Contour™
- All Lutron® wallplates are screwless, seamless and have no visible hardware; the front plate securely snaps into the alignment adapter plate
- Full line of wiring devices in designer style opening
- Blank inserts available for Gloss colors (DV-BI-) and Satin colors (SC-BI-)
- Customize your designer wallplate with engraving, contact customer service to get started at 1.888.LUTRON1

### Ganging and derating

- Designer wallplates use standard ganging
- Requires fins to be removed from dimmers for proper spacing (“Fins Broken” ganging), see pg. 170
- May require derating (i.e., reduction of dimmer capacity due to fin removal), see Derating Tables, pg. 172

**Available finishes**

Use **BOLD** color code in model number (Example: SC-1-**PL**)

Gloss finishes



**WH**  
White

**LA**  
Light Almond

**AL**  
Almond

**IV**  
Ivory

**GR**  
Gray

**BR**  
Brown

**BL**  
Black

Satin finishes



**SW**  
Snow

**LS**  
Limestone


**BI**  
Biscuit

**ES**  
Eggshell

**PD**  
Palladium

**TP**  
Taupe

**ST**  
Stone

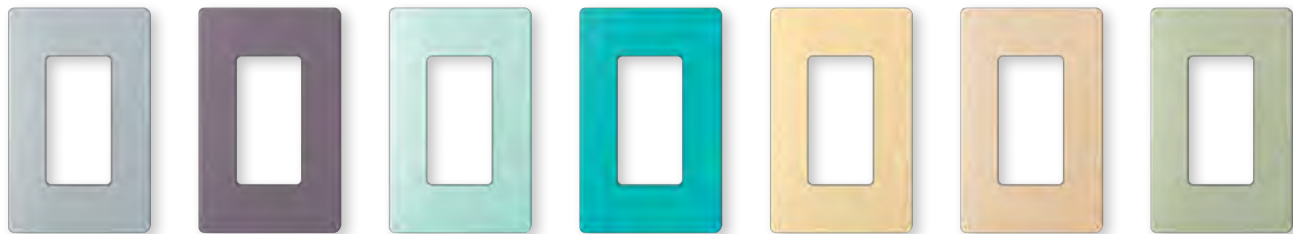

**BG**  
Bluestone

**PL**  
Plum


**SG**  
Sea Glass

**TQ**  
Turquoise

**GS**  
Goldstone

**DS**  
Desert Stone

**GB**  
Greenbriar

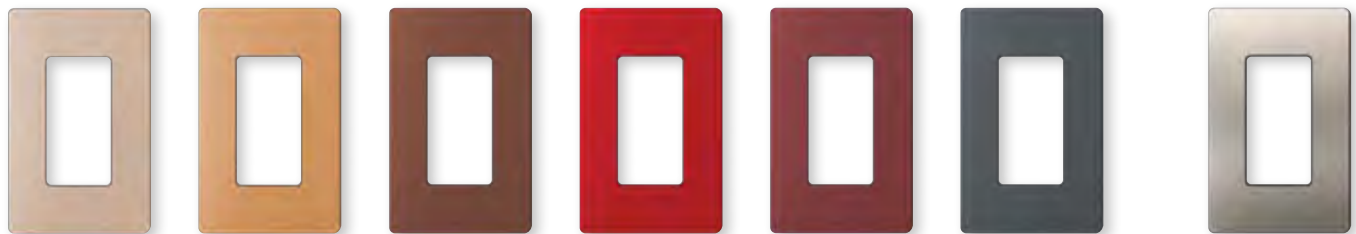

**MS**  
Mocha Stone

**TC**  
Terracotta

**SI**  
Sienna

**HT**  
Hot

**MR**  
Merlot

**MN**  
Midnight

**SS**  
Stainless Steel\*

\*Stainless Steel finish wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.



Wallplates for Maestro®, Maestro IR®, Maestro Wireless®, Pico™ wireless control, Spacer System®, Diva®, Lyneo® Lx, Skylark® and Skylark Contour™



1-gang\*

CW-1-**CC**<sup>2</sup>  
SC-1-**CC**<sup>4</sup>

W: 2.94 in (75 mm); H: 4.69 in (119 mm)  
D: .30 in (7.6 mm)



4-gang\*

CW-4-**CC**<sup>2</sup>  
SC-4-**CC**<sup>4</sup>

W: 8.37 in (213 mm); H: 4.69 in (119 mm);  
D: .30 in (7.6 mm)



2-gang\*

CW-2-**CC**<sup>2</sup>  
SC-2-**CC**<sup>4</sup>


W: 4.75 in (121 mm); H: 4.69 in (119 mm);  
D: .30 in (7.6 mm)



5-gang\*

CW-5-**CC**<sup>2</sup>  
SC-5-**CC**<sup>4</sup>

W: 10.18 in (259 mm); H: 4.69 in (119 mm);  
D: .30 in (7.6 mm)

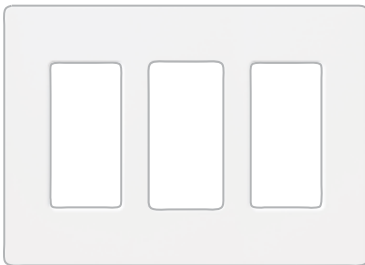

3-gang\*

CW-3-**CC**<sup>2</sup>  
SC-3-**CC**<sup>4</sup>

W: 6.56 in (167 mm); H: 4.69 in (119 mm);  
D: .30 in (7.6 mm)

Multiple devices with line and low-voltage can be mounted behind a common wallplate using a standard barrier backbox, see Application Note #213 (Combining Low-Voltage and Line Voltage Wiring Devices in a Multi-Gang Box) at [www.lutron.com/applicationnotes](http://www.lutron.com/applicationnotes).

**CC**<sup>2</sup>: Gloss and Stainless Steel color codes, see pg. 161

**CC**<sup>4</sup>: Satin color codes, see pg. 161

Multi-gang dimmer installations may require derating, see pg. 170.

\*Stainless Steel finish wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.



6-gang\* CW-6-**CC**<sup>2</sup>  
SC-6-**CC**<sup>4</sup>

W: 12.00in (305mm); H: 4.69in (119mm);  
D: .30in (7.6mm)

### Cable jacks



- F-style, 75-Ohm coaxial cable

Single cable jack\* CA-CJH-**CC**<sup>3</sup>  
SC-CJ-**CC**<sup>4</sup>

### Telephone jacks



- 6-conductor telephone jack, RJ11

Single telephone jack\* CA-PJH-**CC**<sup>3</sup>  
SC-PJ-**CC**<sup>4</sup>

**CC**<sup>2</sup>: Gloss and Stainless Steel color codes, see pg. 161

**CC**<sup>3</sup>: Gloss color codes, see pg. 161

**CC**<sup>4</sup>: Satin color codes, see pg. 161

### Receptacles



#### Tamper resistant receptacles

15A, 125V*	CARS-15-TR- <b>CC</b> <sup>3</sup>
	SCRS-15-TR- <b>CC</b> <sup>4</sup>
20A, 125V*	SCRS-20-TR- <b>CC</b> <sup>4</sup>

#### Receptacles

15A, 125V*	CAR-15H- <b>CC</b> <sup>3</sup>
	SCR-15- <b>CC</b> <sup>4</sup>
20A, 125V*	SCR-20- <b>CC</b> <sup>4</sup>

### GFCI Receptacles



- Press test button to confirm LED indicator status
- Press reset button to reset GFCI after circuit interruption

#### Tamper resistant GFCI receptacles

15A, 125V*	GFCI	CAR-15-GFTR- <b>CC</b> <sup>3</sup>
		SCR-15-GFTR- <b>CC</b> <sup>4</sup>
20A, 125V*	GFCI	SCR-20-GFTR- <b>CC</b> <sup>4</sup>

\*Stainless Steel finish only available as separate wallplate. Match with separate Black (BL) or Midnight (MN) controls and accessories.

**Receptacles for dimming use**



- Duplex for dimming both connected loads
- Projecting nubs prevent standard plugs from being used
- Requires replacement plugs for dimming use

**Duplex for dimming use**

15 A	120/125V*	CAR-15-DFDU- <b>CC</b> <sup>2</sup>
15 A	120/125V*	SCR-15-DFDU- <b>CC</b> <sup>4</sup>
20 A	120/125V*	CAR-20-DFDU- <b>CC</b> <sup>2</sup>
20 A	120/125V*	SCR-20-DFDU- <b>CC</b> <sup>4</sup>

**Receptacles for dimming use**



- Top half for dimming
- Projecting nub prevents standard plug from being used
- Requires replacement plugs for dimming use
- Bottom half is a general use receptacle and will fit standard duplex plugs

**Split duplex (half for dimming use)**

15 A	120/125V*	CAR-15-HFDU- <b>CC</b> <sup>2</sup>
15 A	120/125V*	SCR-15-HFDU- <b>CC</b> <sup>4</sup>
20 A	120/125V*	CAR-20-HFDU- <b>CC</b> <sup>2</sup>
20 A	120/125V*	SCR-20-HFDU- <b>CC</b> <sup>4</sup>

**Receptacles for dimming use**



- Duplex for dimming both connected loads
- Projecting nubs prevent standard plugs from being used
- Requires replacement plugs for dimming use
- 15 A model shown
- Tamper resistant shutter mechanism

**Dual dimming tamper resistant**

15 A	120/125V*	CAR-15-DDTR- <b>CC</b> <sup>2</sup>
15 A	120/125V*	SCR-15-DDTR- <b>CC</b> <sup>4</sup>
20 A	120/125V*	CAR-20-DDTR- <b>CC</b> <sup>2</sup>
20 A	120/125V*	SCR-20-DDTR- <b>CC</b> <sup>4</sup>

**Receptacles for dimming use**



- Top half for dimming
- Projecting nub prevents standard plug from being used
- Requires replacement plugs for dimming use
- Bottom half is a general use receptacle and will fit standard duplex plugs
- 15 A model shown
- Tamper resistant shutter mechanism

**Half dimming tamper resistant**

15 A	120/125V*	CAR-15-HDTR- <b>CC</b> <sup>2</sup>
15 A	120/125V*	SCR-15-HDTR- <b>CC</b> <sup>4</sup>
20 A	120/125V*	CAR-20-HDTR- <b>CC</b> <sup>2</sup>
20 A	120/125V*	SCR-20-HDTR- <b>CC</b> <sup>4</sup>

**CC**<sup>2</sup>: Gloss color code and Stainless Steel, see pg. 161

**CC**<sup>4</sup>: Satin color codes, see pg. 161

\*Stainless Steel finish only available as separate wallplate. Match with separate Black (BL) or Midnight (MN) controls and accessories.

**Replacement plug for dimming  
(use with receptacles on left)**



- This plug required for use with Lutron® receptacles for dimming use—plug will work in standard receptacle
- Easily replaces the existing plugs on lamps

120/125V White	RP-FDU-10-WH
120/125V Brown	RP-FDU-10-BR

UL/CSA/NOM regulatory approvals.

**Important notes**

- If the hot and dimmed hot feeds to the split duplex HFDU are supplied from different circuits or split-wired with separate switch-legs, a means to simultaneously disconnect these circuits must be provided at the panel board where they originate (NEC 210.7(C) 2002 Edition). A 2-pole circuit breaker or two single-pole circuit breakers with an approved handle tie can be used to accomplish this simultaneous disconnect. Feed-through dimming panels, which are those without breakers, are recommended when using the HFDU.
- Receptacles and plugs for dimming use are UL listed for use with all Lutron® wallbox dimmers included in this catalog.
- If there is only one electrical feed to the receptacle, then the duplex DFDU must be used.
- For detailed information, see Application Notes #91 (Guide to Dimming Table Lamps) and #109 (Guide to Dimming Portable Lamps via Receptacles) at [www.lutron.com/applicationnotes](http://www.lutron.com/applicationnotes).

**CC**<sup>2</sup>: Gloss color code and Stainless Steel, see pg. 161

**CC**<sup>4</sup>: Satin color codes, see pg. 161

\*Stainless Steel finish only available as separate wallplate. Match with separate Black (BL) or Midnight (MN) controls and accessories.

**Field customizable 6-port frame**




- Shipped with six blanks in matching colors
- Connectors and wallplate sold separately
- Connectors snap in (no tools required)
- Connectors available in White (WH), unless noted





6-port frame*	CA-6PF- <b>CC</b> <sup>3</sup> SC-6PF- <b>CC</b> <sup>4</sup>
---------------	--

**Connectors for 6-port frame**

**Telephone/network jacks**

 8-conductor, RJ45 category 3	CON-1P-C3- <b>EE</b> <sup>4</sup>
8-conductor, RJ45 category 5e	CON-1P-C5E- <b>EE</b> <sup>4</sup>
8-conductor, RJ45 category 6	CON-1P-C6- <b>EE</b> <sup>4</sup>

**Fiber jacks**

 MT-RJ feed through	CON-1F-MTRJ-WH
 SC simplex	CON-1F-SC-WH
 LC non-flush mount	CON-1F-LG-WH
 ST style	CON-1F-ST-WH

**Cable jack**

 F-style, 75-Ohm coaxial cable	CON-1C- <b>EE</b> <sup>4</sup>
---	--------------------------------

**BNC jack**

 BNC connector, 50-Ohm	CON-1B-WH
---	-----------

Connectors only for use with 6-port frame.

**Switches**



- Paddle turns on/off
- Use with any 15A load
- General purpose switching of all sources and motor loads
- No derating if ganged

**General purpose switches (120/277 V)**

Single-pole	15A*	CA-1PSH- <b>CC</b> <sup>3</sup> SC-1PS- <b>CC</b> <sup>4</sup>
3-way	15A*	CA-3PSH- <b>CC</b> <sup>3</sup> SC-3PS- <b>CC</b> <sup>4</sup>
4-way	15A*	CA-4PSH- <b>CC</b> <sup>3</sup> SC-4PS- <b>CC</b> <sup>4</sup>

**General purpose switch with locator light (120V only)**

Single-pole	15A*	CA-1PSNL- <b>EE</b> <sup>2</sup> SC-1PSNL- <b>EE</b> <sup>10</sup>
3-way	15A*	CA-3PSNL- <b>EE</b> <sup>2</sup> SC-3PSNL- <b>EE</b> <sup>10</sup>
4-way	15A*	CA-4PSNL- <b>EE</b> <sup>2</sup> SC-4PSNL- <b>EE</b> <sup>10</sup>

**CC**<sup>3</sup>: Gloss color codes, see pg. 161

**CC**<sup>4</sup>: Satin color codes, see pg. 161

**EE**<sup>2</sup>: Only available in Almond (AL), Ivory (IV), Light Almond (LA) and White (WH)

**EE**<sup>4</sup>: Only available in White (WH) and Black (BL)

**EE**<sup>10</sup>: Available in Biscuit (BI), Eggshell (ES), Goldstone (GS), Limestone (LS), Sea Glass (SG) and Snow (SW)

\*Stainless Steel finish only available as separate wallplate. Match with separate Black (BL) or Midnight (MN) controls and accessories.

## How to understand ganging and derating

### Standard ganging

Ganging is the side-by-side mounting of two or more dimmers or accessory devices under a multi-gang wallplate.

Standard multi-gang installation:

- Uses standard multi-gang electrical backboxes
- Uses standard multi-gang wallplates
- Requires fins to be removed from dimmers for proper spacing (“Fins Broken” ganging)
- May require derating (i.e., reduction of dimmer capacity due to fin removal), see Derating Tables, pgs. 172–173

### Custom ganging for Architectural style controls

For Architectural style dimmers and switches, it is possible to retain the maximum capacity of dimmers in multi-gang applications via custom architectural multi-gang:

- May require customized, wider-than-standard wallplates
- May require wider-than-standard electrical backboxes
- Allows full capacity (“No Fins Broken”) ganging
- Required for Nova® dimmers and for larger width (high capacity) architectural controls
- Visit [www.lutron.com/customganging](http://www.lutron.com/customganging) for additional information

## Standard ganging for dimmers, switches and accessories

### New Architectural




pg. 148

### Architectural




pg. 152

### Designer



pg. 160

### Traditional



pg. 166




Vierti®



Vareo®  
Nova T☆®



Maestro®  
Maestro IR®  
Maestro Wireless®  
Spacer System®  
Diva®  
Lyneo® Lx  
Skylark®  
Skylark Contour™



Abella®  
Ceana®  
Ariadni®  
Glyder®  
Rotary

Derating Table 1  
pg. 172

Derating Table 2  
pg. 173

Derating Table 1  
pg. 172

Derating Table 1  
pg. 172

**Standard ganging and fins broken derating examples:**



**Custom Architectural ganging example:**



For further information on ganging and derating, visit [www.lutron.com/multigang](http://www.lutron.com/multigang).

\*The fins are scored and designed to be removed easily.

**Derating Table 1**

**New Architectural** | Verti®

**Designer** | Maestro®, Maestro IR®, Maestro Wireless®, Spacer System®, Diva®, Lyneo® Lx, Skylark Contour™, Skylark®

**Traditional** | Abella®, Ceano®, Ariadni®, Glyder®, Rotary



**No fins broken**



**1 fin broken**



**2 fins broken**

	No fins broken	1 fin broken	2 fins broken
<b>Incandescent</b>			
Dimmers	600W	500W	400W
	1000W	800W	650W
Dual dimmers	300W	250W	200W
	300W	250W	200W
<b>Magnetic low-voltage</b>			
Dimmers	600VA/450W	500VA/400W	400VA/300W
	1000VA/800W	800VA/650W	650VA/500W
<b>Electronic low-voltage</b>			
Dimmers	300W	250W	200W
	500W	450W	400W
	600W	500W	400W
<b>Fluorescent</b>			
<b>Hi-lume®/Hi-lume® Compact SE/Eco-10®/EcoSystem®</b>			
Verti	60 ballasts/6A	50 ballasts/5A	35 ballasts/3.5A
Maestro/Spacer System	20 ballasts/6A	20 ballasts/5A	20 ballasts/3.5A
Diva, Skylark, Lyneo Lx and Ariadni	no derating	no derating	no derating
Tu-Wire®: Spacer System, Diva, Skylark	5A	4A	3.3A
<b>Fan controls</b>			
Quiet 7-speed	1.0A/300W	1.0A/300W	1.0A/300W
Quiet 3-speed	1.5A	1.5A	1.5A
Fully variable	5A	4A	3A
<b>Fan/light controls</b>			
Quiet 7-speed	1.0A/300W	1.0A/300W	1.0A/300W
Quiet 3-speed	1.5A/300W	1.5A/300W	1.5A/300W
	1.5A/360W	1.5A/360W	1.5A/360W
Fully variable	2.5A/300W	2.1A/250W	1.7A/200W
<b>Electronic switches</b>			
Verti	6A/3A	5A/3A	3.5A/3A
Maestro (light/fan)	8A/3A	6.5A/3A	5A/3A
Abella (light/fan)	6A/3A	5A/3A	3.5A/3A



**Derating Table 2**

**Architectural** | Vareo®, Nova T☆®



**No fins broken**



**1 fin broken**



**2 fins broken**

	No fins broken	1 fin broken	2 fins broken
<b>Incandescent</b>			
Dimmers	600W	500W	300W
	1000W	900W	700W
	1500W	1250W	1000W
	1950W	–	–
<b>Magnetic low-voltage</b>			
Dimmers	600 VA/450 W	500 VA/400 W	300 VA/250 W
	1000 VA/800 W	900 VA/750 W	700 VA/500 W
	1500 VA/1200 W	1250 VA/1000 W	1000 VA/800 W
<b>Electronic low-voltage</b>			
Dimmers	300W	300W	250W
	600W	500W	400W
<b>Fluorescent</b>			
<b>Hi-lume®/Hi-lume® Compact SE/Eco-10®/EcoSystem®</b>			
Vareo	20 ballasts /8 A	20 ballasts /6 A	20 ballasts /4.5 A
Nova T☆	6 A	no derating	no derating
	8 A	no derating	no derating
	16 A	no derating	no derating
0-10VDC control <sup>1</sup>	30mA ballasts	no derating	no derating
Tu-Wire®	5 A	4 A	3.3 A
<b>Fan controls</b>			
Quiet 3-speed	1.5 A	no derating	no derating
Fully variable	6 A	4.2 A	2.5 A
Fully variable	12 A	10 A	8.3 A
<b>Electronic tapswitches<sup>2</sup></b>			
VETS-1000-	1000W	800W	650W
VETS-1000-SL-	1000W	900W	700W
VETN-1000-	1000 VA	700 VA	550 VA

For further information on ganging Nova®, visit [www.lutron.com/customganging](http://www.lutron.com/customganging).

<sup>1</sup>PowerPack required for line voltage switching.

<sup>2</sup>VETS-R-Auxiliary electronic tapswitches do not require derating.


## Dimmer capabilities and interface requirements











**M** Multi-location—true dimming from each location

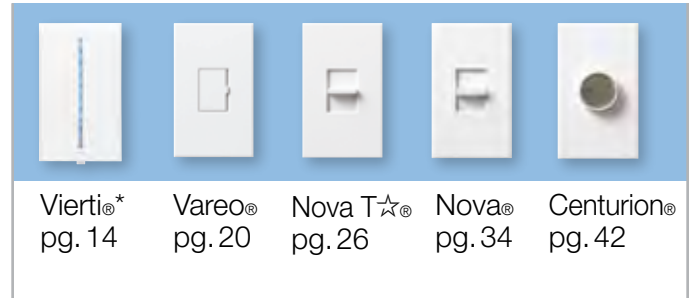**E** eco-model available

 Compatible dimmer (no interface)

**WBX** **TVI** **3F** **PA** Requires interface, see notes below



Dimmers	capacity†	<b>M</b>				
 <b>Incandescent/halogen</b> 120V	600W			<b>M</b>		
	1000W			<b>M</b>		
	1500W		<b>WBX</b>			
	2000W		<b>WBX</b>			
 <b>Magnetic low-voltage</b> 120V	600VA (450W)					
	1000VA (800W)					
	1500VA (1200W)		<b>WBX</b>			
	2000VA (1600W)		<b>WBX</b>	<b>WBX</b>		
 <b>Magnetic low-voltage</b> 277V	600VA (450W)		<b>WBX</b>		<b>WBX</b>	
	1000VA (800W)		<b>WBX</b>		<b>WBX</b>	
 <b>Electronic low-voltage</b> 120V	300W		<b>WBX</b>			
	450W		<b>WBX</b>	<b>WBX</b>		
	600W		<b>WBX</b>		<b>WBX</b>	
 <b>Electronic low-voltage</b> 277V	16A		<b>WBX</b>	<b>WBX</b>	<b>WBX</b>	
 <b>Neon/cold cathode</b>			<b>WBX</b>	<b>WBX</b>		
 <b>3-wire ballasts and Hi-lume® LED driver</b> 120V	6A					
	Hi-lume, Hi-lume Compact SE,	8A				
	Eco-10® and EcoSystem® ballasts	16A		<b>3F</b>		
 <b>3-wire ballasts and Hi-lume LED driver</b> 277V	6A		<b>3F</b>			
	Hi-lume, Hi-lume Compact SE,	8A		<b>3F</b>		
	Eco-10 and EcoSystem ballasts	16A		<b>3F</b>	<b>3F</b>	<b>3F</b>
				<b>3F</b>		
 <b>Tu-Wire®</b> ballasts 120V	5A		<b>PA</b>			
 <b>0-10VDC</b> (ballasts or LED Drivers) 120/277V	16A	<b>TVI</b>	<b>TVI</b>			

**WBX:** Wallbox Phase Adaptive Power Module (PHPM-WBX-DV-WH)

**3F:** Fluorescent Power Module (PHPM-3F-DV-WH)

**TVI:** 0-10V Interface (GRX-TVI)

**PA:** Phase Adaptive Power Module (PHPM-PA-DV-WH)

**See pgs. 178–179 for specific compatible dimmer models and switching interface solutions.**

\*Consult Lutron Technical Support for information on interfaces with Vierti.

†UL listed for FULL wattage indicated (derate capacity only if ganged with other devices).


## Dimmer capabilities and interface requirements

**M** Multi-location—true dimming from each location

**E** eco-model available

 Compatible dimmer (no interface)

**WBX** **TVI** **3F** **PA** Requires interface, see notes below

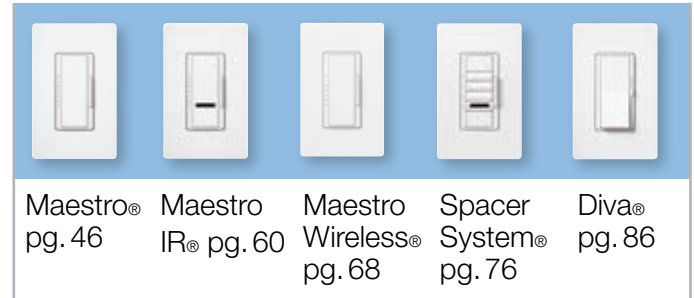

Dimmers	capacity†	<b>M</b>	<b>M</b>	<b>M</b>	<b>M</b>	
 <b>Incandescent/halogen</b> 120V	600W	<b>E</b>				<b>E</b>
	1000W					
	1500W	<b>WBX</b>		<b>WBX</b>	<b>WBX</b>	<b>WBX</b>
	2000W	<b>WBX</b>		<b>WBX</b>	<b>WBX</b>	<b>WBX</b>
 <b>Magnetic low-voltage</b> 120V	600VA (450W)					
	1000VA (800W)					
	1500VA (1200W)	<b>WBX</b>		<b>WBX</b>	<b>WBX</b>	<b>WBX</b>
	2000VA (1600W)	<b>WBX</b>		<b>WBX</b>	<b>WBX</b>	<b>WBX</b>
 <b>Magnetic low-voltage</b> 277V	600VA (450W)	<b>WBX</b>		<b>WBX</b>	<b>WBX</b>	<b>WBX</b>
	1000VA (800W)	<b>WBX</b>		<b>WBX</b>	<b>WBX</b>	<b>WBX</b>
 <b>Electronic low-voltage</b> 120V	300W			<b>WBX</b>		
	450W			<b>WBX</b>		<b>WBX</b>
	600W			<b>WBX</b>		<b>WBX</b>
 <b>Electronic low-voltage</b> 277V	16A	<b>WBX</b>		<b>WBX</b>	<b>WBX</b>	<b>WBX</b>
 <b>Neon/cold cathode</b>				<b>WBX</b>		<b>WBX</b>
 <b>3-wire ballasts and Hi-lume® LED driver</b> 120V	6A					
	Hi-lume, Hi-lume Compact SE, 8A	<b>3F</b>		<b>3F</b>	<b>3F</b>	
	Eco-10® and EcoSystem® ballasts 16A	<b>3F</b>		<b>3F</b>	<b>3F</b>	<b>3F</b>
 <b>3-wire ballasts and Hi-lume LED driver</b> 277V	6A					
	Hi-lume, Hi-lume Compact SE, 8A	<b>3F</b>		<b>3F</b>	<b>3F</b>	<b>3F</b>
	Eco-10 and EcoSystem ballasts 16A	<b>3F</b>		<b>3F</b>	<b>3F</b>	<b>3F</b>
 <b>Tu-Wire®</b> ballasts 120V	5A	<b>PA</b>		<b>PA</b>		
 <b>0-10VDC</b> (ballasts or LED Drivers) 120/277V	16A	<b>TVI</b>		<b>TVI</b>	<b>TVI</b>	<b>TVI</b>

**WBX:** Wallbox Phase Adaptive Power Module (PHPM-WBX-DV-WH)

**3F:** Fluorescent Power Module (PHPM-3F-DV-WH)

See pgs. 178–179 for specific compatible dimmer models and switching interface solutions.

**TVI:** 0-10V Interface (GRX-TVI)

**PA:** Phase Adaptive Power Module (PHPM-PA-DV-WH)

†UL listed for FULL wattage indicated (derate capacity only if ganged with other devices).

## Dimmer capabilities and interface requirements

**M** Multi-location—true dimming from each location

**E** eco-model available

 Compatible dimmer (no interface)

**WBX** **TVI** **3F** **PA** Requires interface, see notes below

					
		Lyneo® Lx pg. 94	Skylark Contour™ pg. 100	Skylark® pg. 104	Abella® pg. 114
Dimmers	capacity†				<b>M</b>
 <b>Incandescent/halogen</b> 120V	600W		<b>E</b>	<b>E</b>	
	1000W				
	1500W	<b>WBX</b>		<b>WBX</b>	
	2000W	<b>WBX</b>		<b>WBX</b>	
 <b>Magnetic low-voltage</b> 120V	600 VA (450W)				
	1000 VA (800W)			<b>WBX</b>	
	1500 VA (1200W)	<b>WBX</b>		<b>WBX</b>	
	2000 VA (1600W)	<b>WBX</b>		<b>WBX</b>	
 <b>Magnetic low-voltage</b> 277V	600 VA (450W)	<b>WBX</b>		<b>WBX</b>	
	1000 VA (800W)	<b>WBX</b>		<b>WBX</b>	
 <b>Electronic low-voltage</b> 120V	300W				
	450W			<b>WBX</b>	
	600W			<b>WBX</b>	
 <b>Electronic low-voltage</b> 277V	16A	<b>WBX</b>		<b>WBX</b>	
 <b>Neon/cold cathode</b>		<b>WBX</b>		<b>WBX</b>	
 <b>3-wire ballasts and Hi-lume® LED driver</b> 120V	6A				
	Hi-lume, Hi-lume Compact SE, Eco-10® and EcoSystem® ballasts	8A			
		16A	<b>3F</b>		<b>3F</b>
 <b>3-wire ballasts and Hi-lume LED driver</b> 277V	6A				
	Hi-lume, Hi-lume Compact SE, Eco-10 and EcoSystem ballasts	8A	<b>3F</b>		<b>3F</b>
		16A	<b>3F</b>		<b>3F</b>
 <b>Tu-Wire® ballasts</b> 120V	5A	<b>PA</b>			
 <b>0-10VDC</b> (ballasts or LED Drivers) 120/277V	16A	<b>TVI</b>		<b>TVI</b>	

**WBX:** Wallbox Phase Adaptive Power Module (PHPM-WBX-DV-WH)

**3F:** Fluorescent Power Module (PHPM-3F-DV-WH)

**See pgs. 178–179 for specific compatible dimmer models and switching interface solutions.**


**TVI:** 0-10V Interface (GRX-TVI)










**PA:** Phase Adaptive Power Module (PHPM-PA-DV-WH)

†UL listed for FULL wattage indicated (derate capacity only if ganged with other devices).
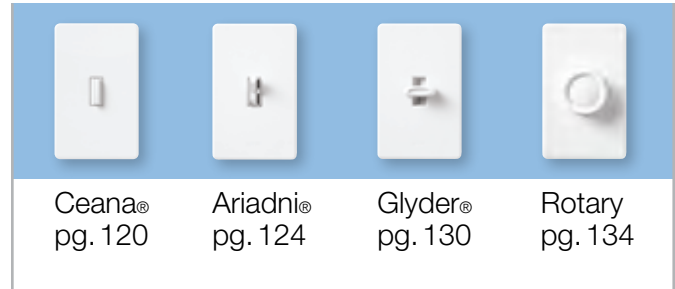
## Dimmer capabilities and interface requirements

- M** Multi-location—true dimming from each location
- E** eco-model available
- Compatible dimmer (no interface)
- WBX** **TVI** **3F** **PA** Requires interface, see notes below



Dimmers	capacity†				
 <b>Incandescent/halogen</b> 120V	600W		<b>E</b>		<b>E</b>
	1000W				
	1500W		<b>WBX</b>		
	2000W		<b>WBX</b>		
 <b>Magnetic low-voltage</b> 120V	600 VA (450W)				
	1000 VA (800W)				
	1500 VA (1200W)		<b>WBX</b>		
	2000 VA (1600W)		<b>WBX</b>		
 <b>Magnetic low-voltage</b> 277V	600 VA (450W)		<b>WBX</b>		
	1000 VA (800W)		<b>WBX</b>		
 <b>Electronic low-voltage</b> 120V	300W		<b>WBX</b>		
	450W		<b>WBX</b>		
	600W		<b>WBX</b>		
 <b>Electronic low-voltage</b> 277V	16A		<b>WBX</b>		
 <b>Neon/cold cathode</b>			<b>WBX</b>		
 <b>3-wire ballasts and Hi-lume® LED driver</b> 120V	6A				
	Hi-lume, Hi-lume Compact SE, Eco-10® and EcoSystem® ballasts	8A			
		16A		<b>3F</b>	
 <b>3-wire ballasts and Hi-lume LED driver</b> 277V	6A				
	Hi-lume, Hi-lume Compact SE, Eco-10 and EcoSystem ballasts	8A		<b>3F</b>	
		16A		<b>3F</b>	
 <b>Tu-Wire®</b> ballasts 120V	5A		<b>PA</b>		
 <b>0-10VDC</b> (ballasts or LED Drivers) 120/277V	16A		<b>TVI</b>		

**WBX:** Wallbox Phase Adaptive Power Module (PHPM-WBX-DV-WH)

**3F:** Fluorescent Power Module (PHPM-3F-DV-WH)




**See pgs. 178–179 for specific compatible dimmer models and switching interface solutions.**

**TVI:** 0-10V Interface (GRX-TVI)

**PA:** Phase Adaptive Power Module (PHPM-PA-DV-WH)

†UL listed for FULL wattage indicated (derate capacity only if ganged with other devices).



**Dimmer models/load interface compatibility**

	Incandescent, magnetic and electronic low-voltage (120/277 V)		3-wire Fluorescent ballasts or Hi-lume® LED drivers (120/277 V)		0-10VDC Ballasts or LED drivers (120/277 V)	
	<b>WBX</b> 		<b>3F</b> 		<b>TVI</b> 	
	Wallbox Phase Adaptive Power Module* PHPM-WBX-DV-WH		Fluorescent Power Module* PHPM-3F-DV-WH		0-10V Interface GRX-TV1	
<b>Dimmer Family</b>	Single-pole	3-way or multi-location	Single-pole	3-way or multi-location	Single-pole	3-way or multi-location
Abella®	–	–	–	–	–	–
Ariadni®	–	AYF-103P-	–	AYF-103P-	–	AYF-103P-
Ceana®	–	–	–	–	–	–
Diva® Gloss	–	DVF-103P-	–	DVF-103P-	–	DVF-103P-
Diva Satin Colors®	–	DVSCF-103P-	–	DVSCF-103P-	–	DVSCF-103P-
Glyder®	–	–	–	–	–	–
Lyneo® Lx	–	LXF-103PL-	–	LXF-103PL-	–	LXF-103PL-
Maestro® Gloss	–	MAF-6AM-	–	MAF-6AM-	–	MAF-6AM-
Maestro® Satin Colors®	–	MSCF-6AM-	–	MSCF-6AM-	–	MSCF-6AM-
Maestro Wireless®	–	MRF2-F6AN-DV-	–	MRF2-F6AN-DV-	–	MRF2-F6AN-DV-
Nova®	NF-10-	NF-103P-	NF-10-	NF-103P-	NF-10-	NF-103P-
Nova T☆®	NTF-10-	NTF-103P-	NTF-10-	NTF-103P-	NTF-10-	NTF-103P-
Skylark®	SF-10P-	SF-103P-	SF-10P-	SF-103P-	SF-10P-	SF-103P-
Spacer System®	–	SPSF-6AM-	–	SPSF-6AM-	SPSF-S6A-	SPSF-6AM-
Vareo®	–	VF-10-	–	VF-10-	–	VF-10-
Vierti®	contact Lutron		contact Lutron		–	VTF-6AM-

**Use only dimmer model numbers listed.**

\*Dual 120/277 V model given, 120V only versions are also available. Please see Technical notes, pg. 179.

**Dimmer models/load interface compatibility**

	Tu-Wire® Fluorescent Ballasts (120V)		Switched Lighting (120/277V)	
	<b>PA</b> 		<b>SW</b> 	
	Phase Adaptive Power Module* PHPM-PA-DV-WH		Switching Power Module* PHPM-SW-DV-WH	
<b>Dimmer Family</b>	Single-pole	3-way or multi-location	Single-pole	3-way or multi-location
Abella®	–	–	–	AB-S6AM-
Ariadni®	–	AYF-103P-	–	–
Ceana®	–	–	–	–
Diva® Gloss	–	DVF-103P-	–	–
Diva Satin Colors®	–	DVSCF-103P-	–	–
Glyder®	–	–	–	–
Lyneo® Lx	–	LXF-103PL-	LX-1PSL-	LX-3PSL-
Maestro® Gloss	–	MAF-6AM-	–	MA-S8AM-
Maestro® Satin Colors®	–	MSCF-6AM-	–	MSC-S8AM-
Maestro Wireless®	–	MRF2-F6AN-DV-	–	MRF2-6ANS-
Nova®	NF-10-	NF-103P-	–	–
Nova T☆®	NTF-10-	NTF-103P-	–	–
Skylark®	SF-10P-	SF-103P-	–	–
Spacer System®	SPSF-S6A-	SPSF-6AM-	SPSF-S6A-	SPSF-S6AM-
Vareo®	–	VF-10-	–	VETN-1000-
Vierti®	contact Lutron		contact Lutron	

**Technical notes**

- Lighting load interfaces must be matched to load type and voltage
- All load interfaces for dimmed load are controlled by a 120V 3-wire fluorescent dimmer
- Power feed to dimmer may differ from lighting load/interface voltage
- Interfaces typically require additional power feeds
- For wiring information, consult wiring diagrams, see pgs. 193-195
- For assistance and additional solutions, consult Lutron Technical Support at 1.800.523.9466 (24 hours/7 days)


**Interface mounting**

- PHPM interfaces mount to 2-gang electrical backbox (W: 6.30 in x H: 5.10 in)
- GRX-TVI enclosure is surface mount only (W: 6.10 in x H: 12.50 in x D: 3.30 in)

**Use only dimmer model numbers listed.**

\*Dual 120/277V model given, 120V only versions are also available. Please see Technical notes, pg. 179.

# Maestro®

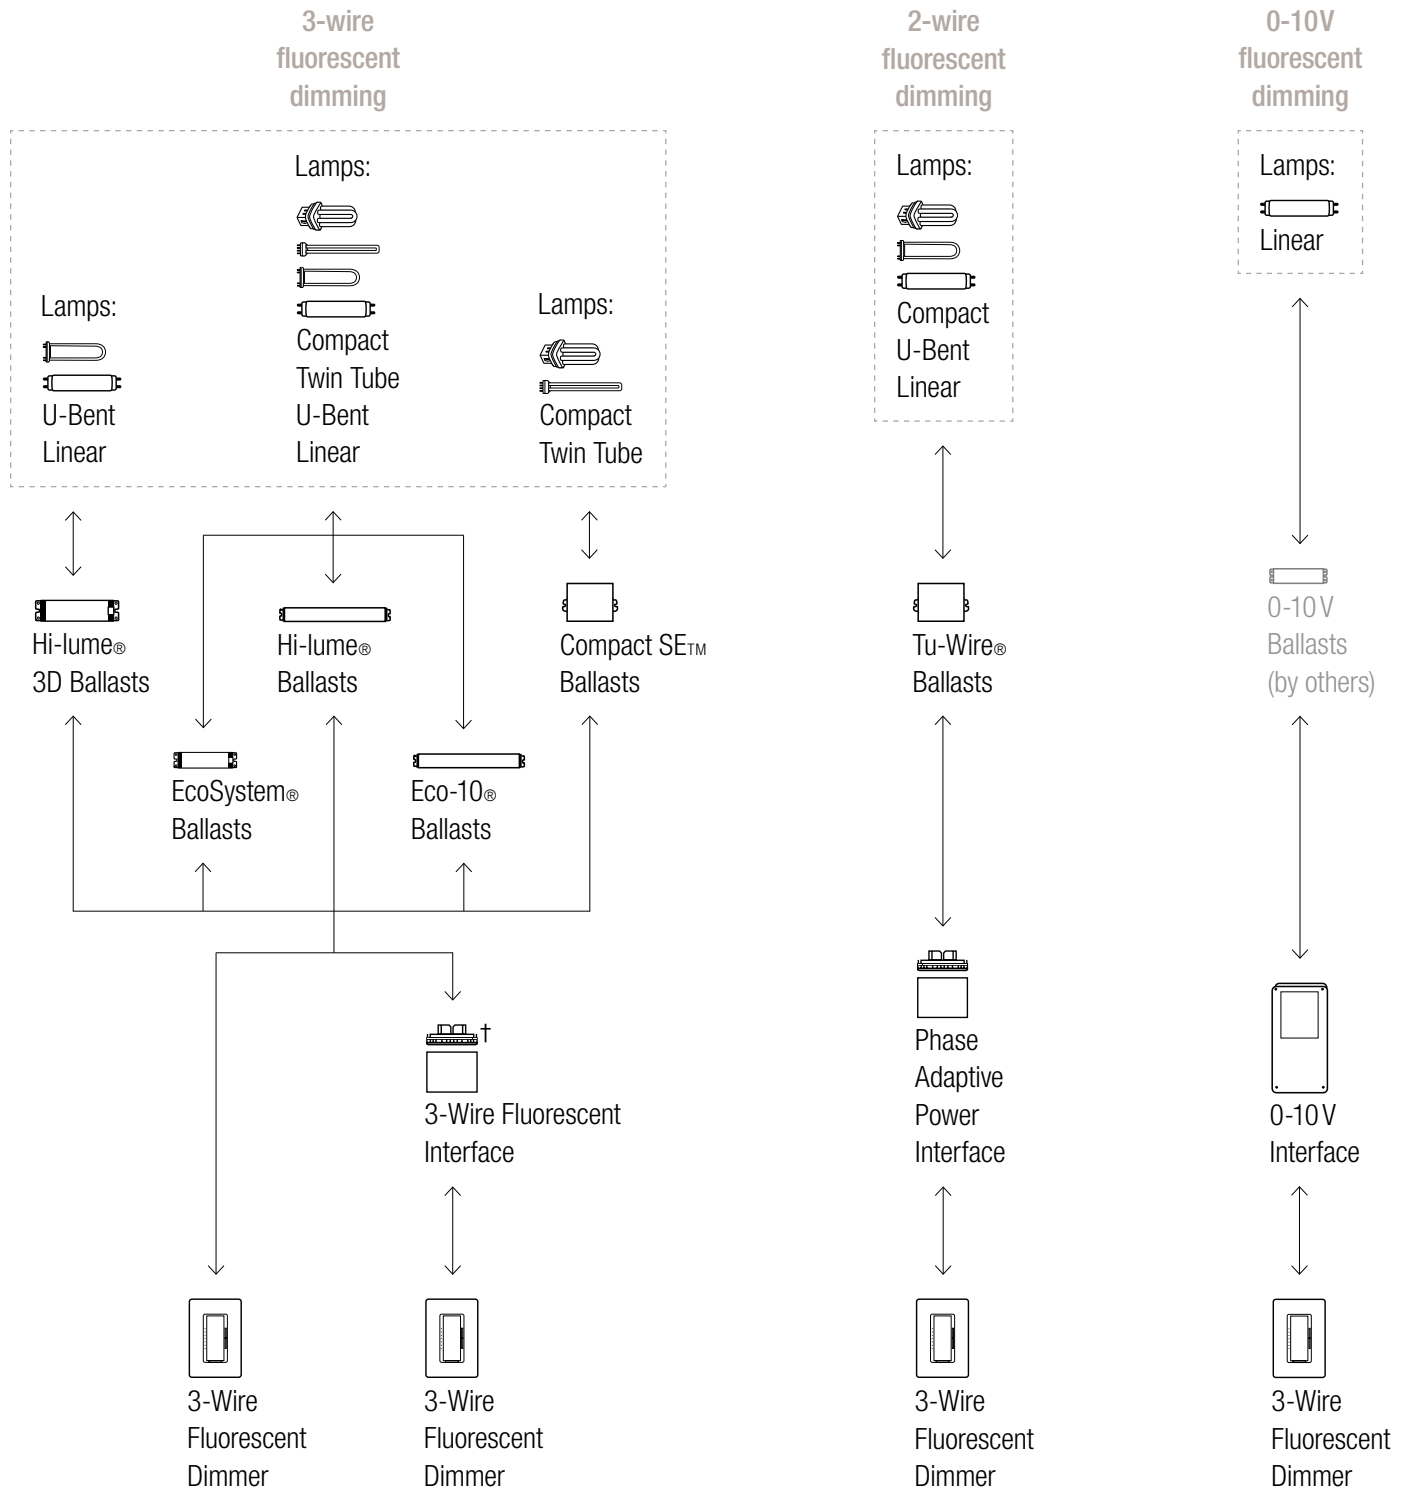


**For illustration purposes only.** Consult model number pages for specific voltage and capacity information.

For more information on LED drivers, visit [www.lutron.com/LED](http://www.lutron.com/LED).

†Interface provides additional capacity and/or may be different voltage than dimmer.



Maestro®

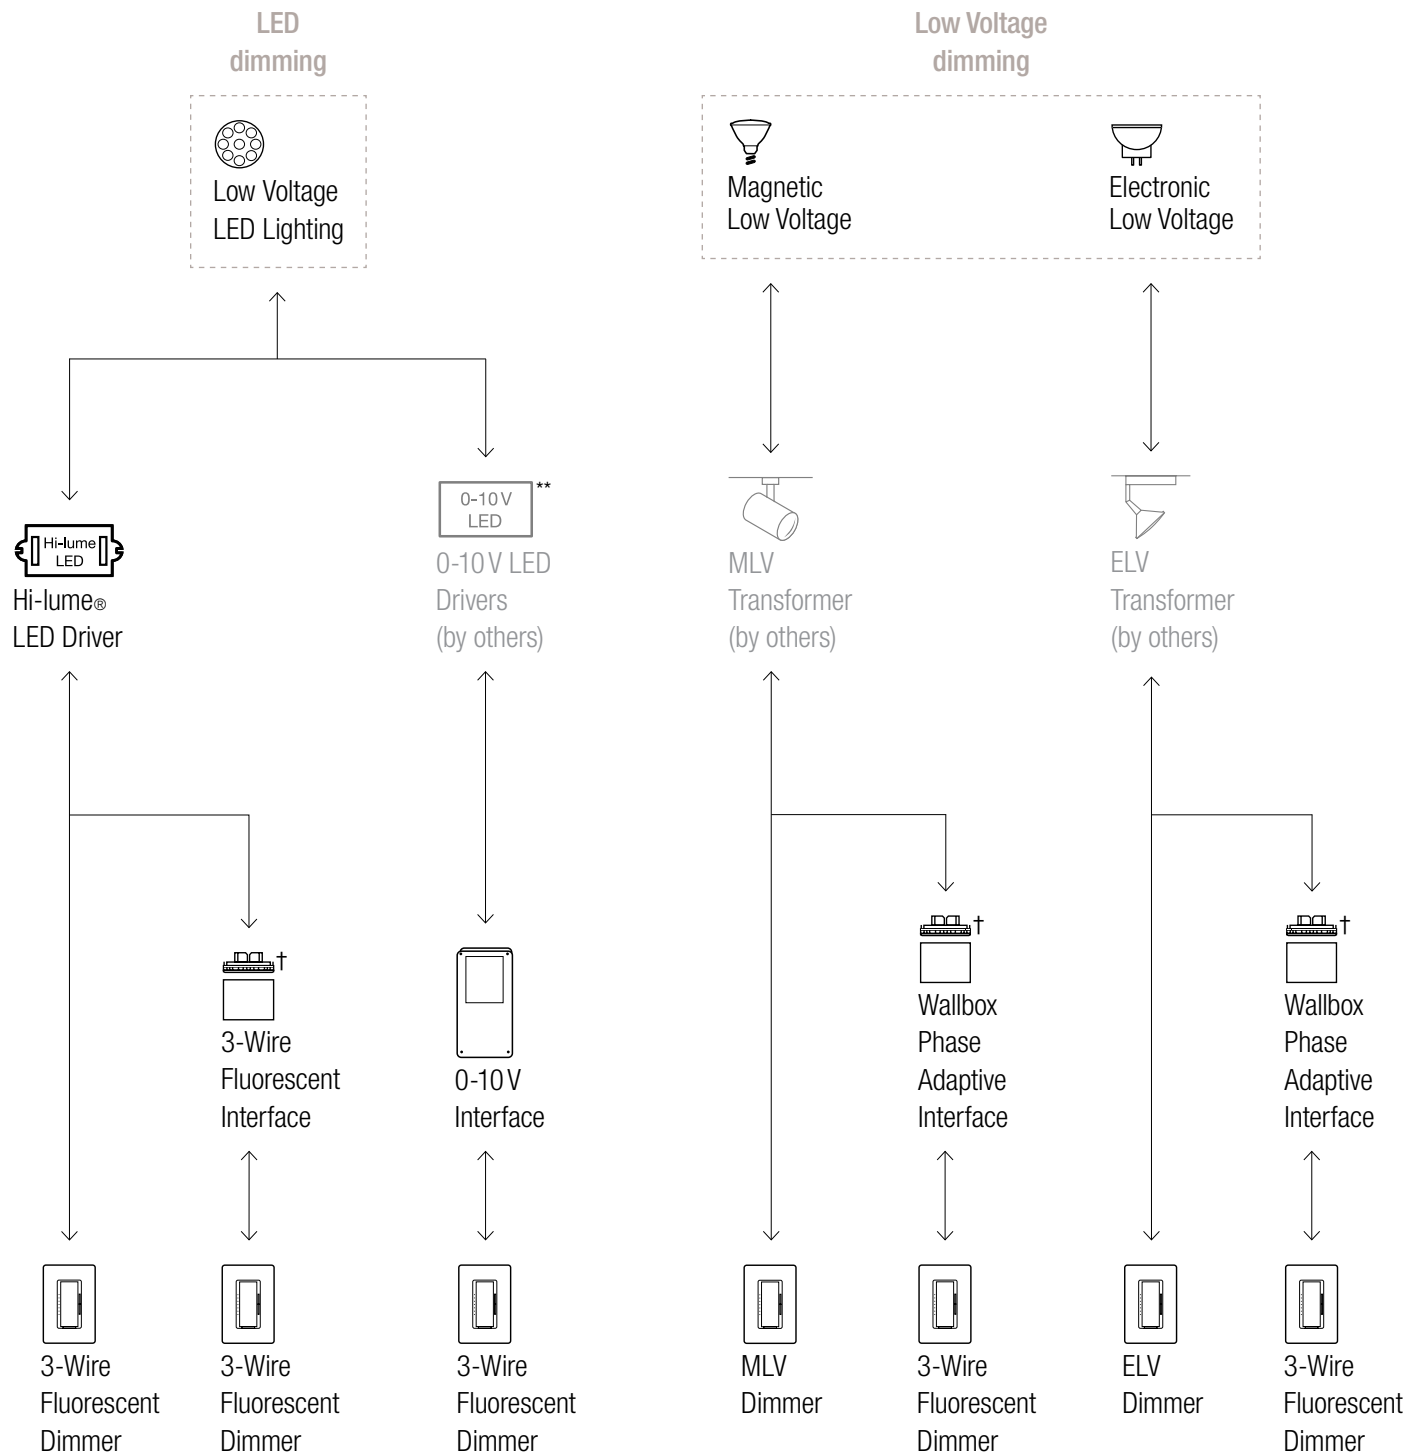


**For illustration purposes only.** Consult model number pages for specific voltage and capacity information.

For more information on LED drivers, visit [www.lutron.com/LED](http://www.lutron.com/LED).

\*\*Consult [www.lutron.com/LED](http://www.lutron.com/LED) for compatible 0-10V LED drivers.

†Interface provides additional capacity and/or may be different voltage than dimmer.


# Maestro®

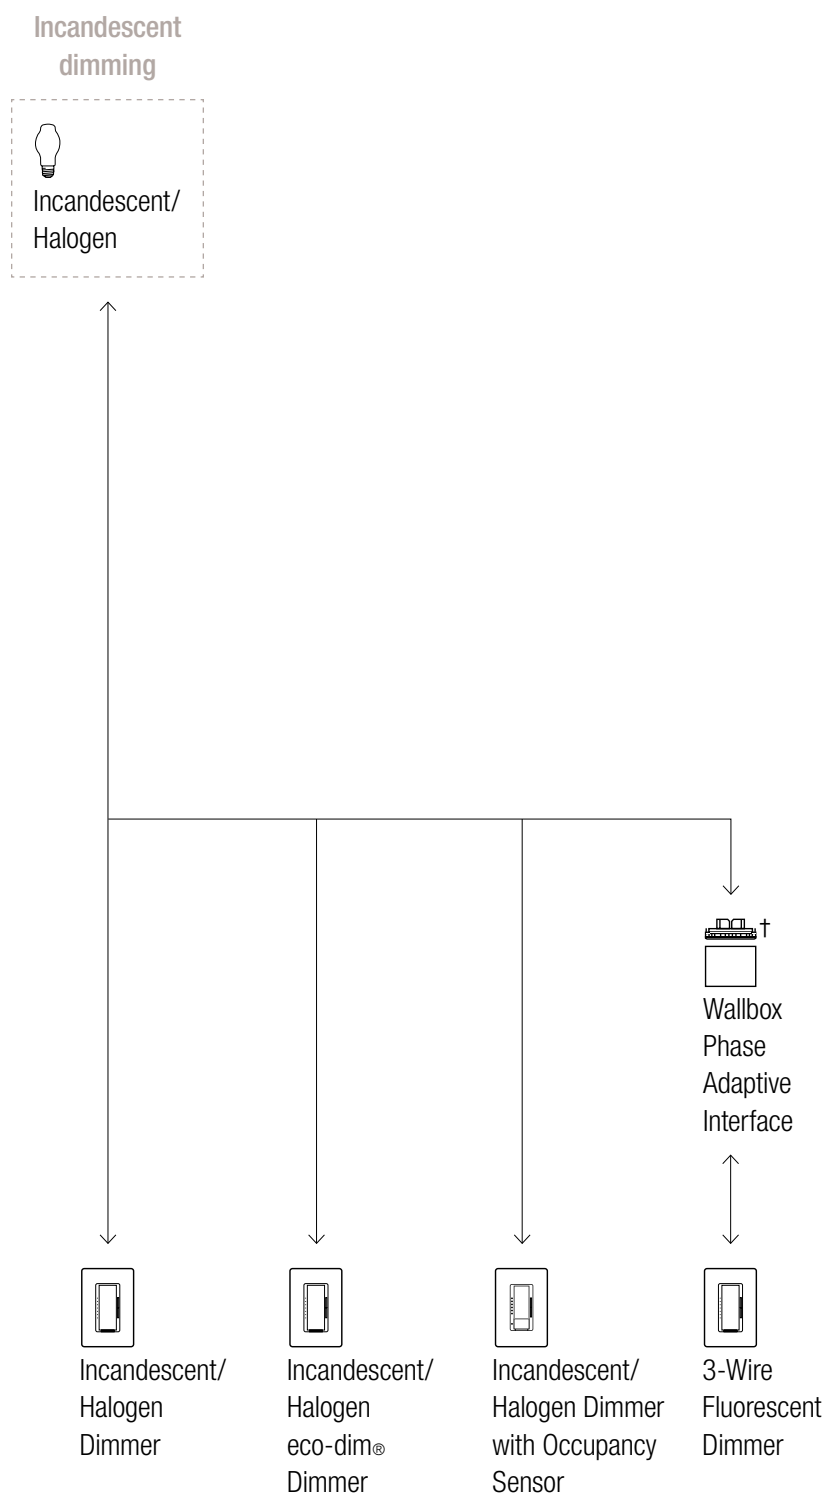

**For illustration purposes only.** Consult model number pages for specific voltage and capacity information.

†Interface provides additional capacity and/or may be different voltage than dimmer.

Maestro®

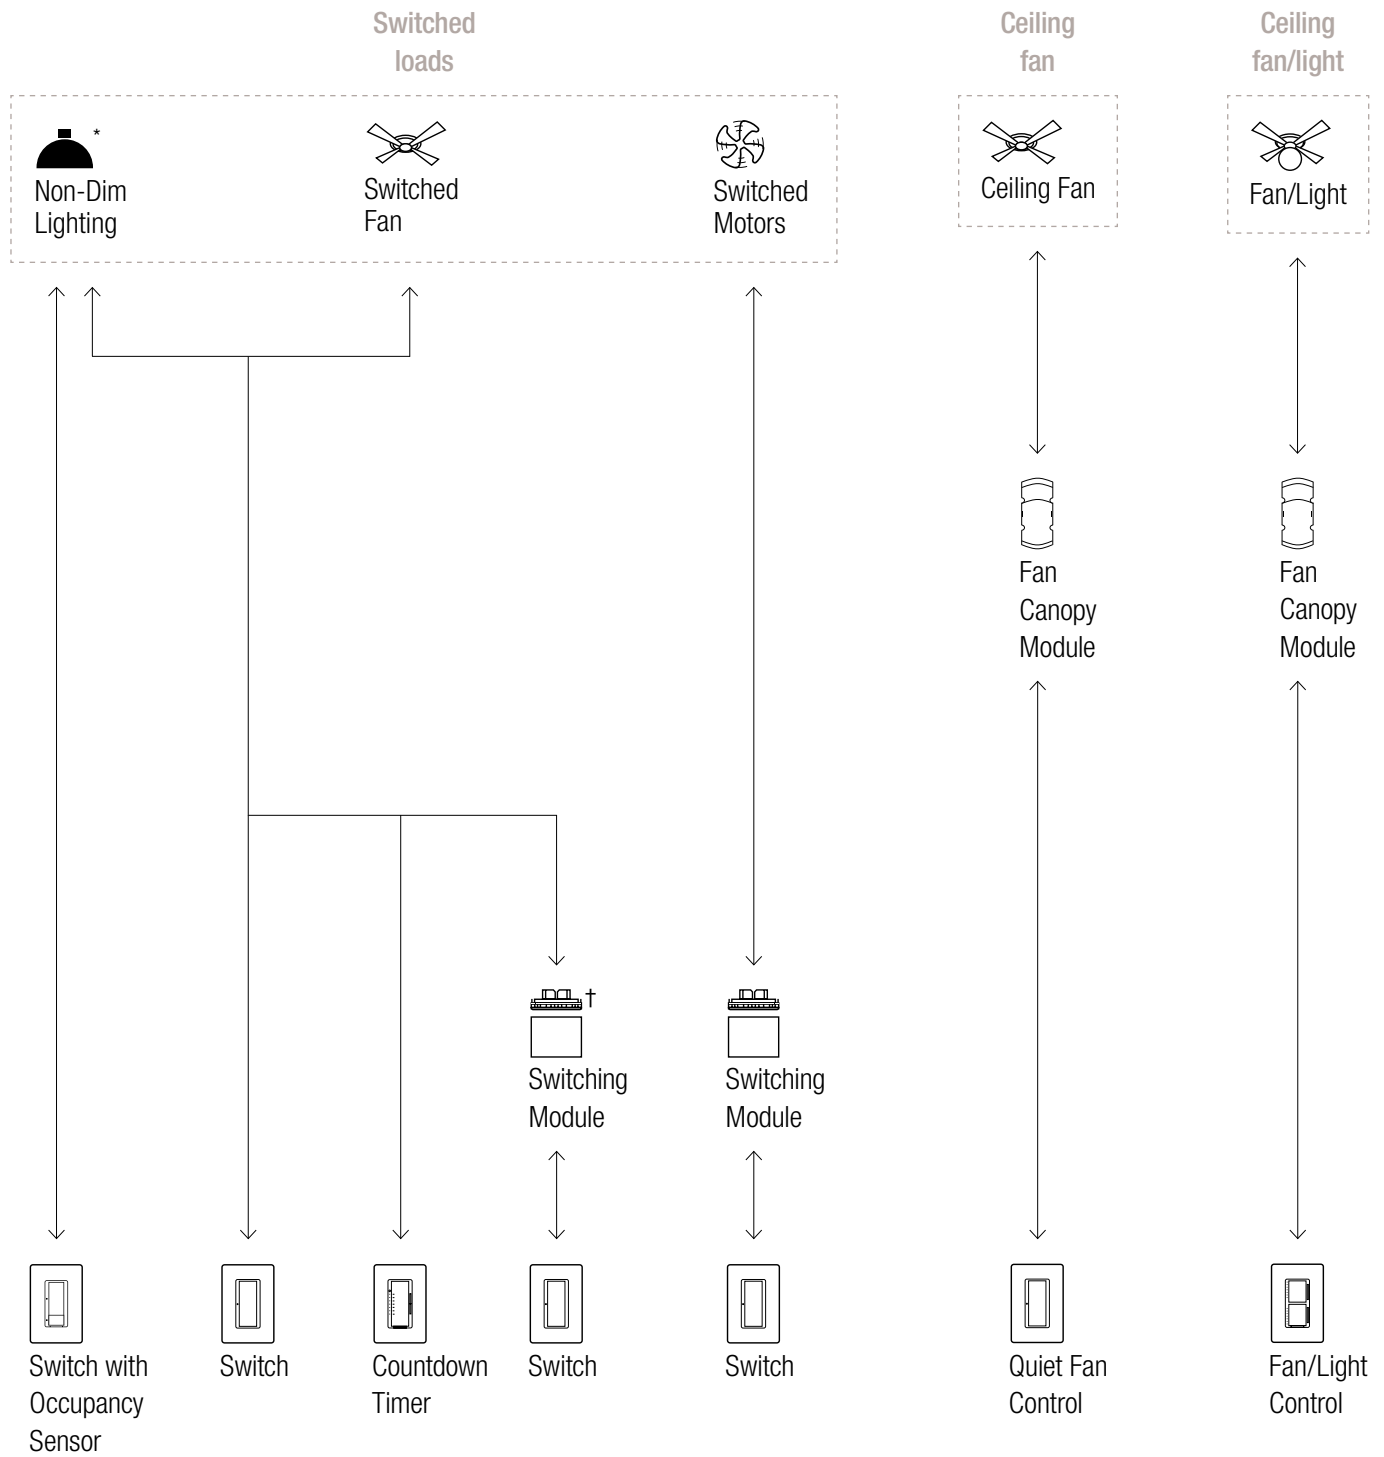


**For illustration purposes only.** Consult model number pages for specific voltage and capacity information.

\*Refer to pg. 54 for specific load type.

†Interface provides additional capacity and/or may be different voltage than dimmer.

# Maestro®

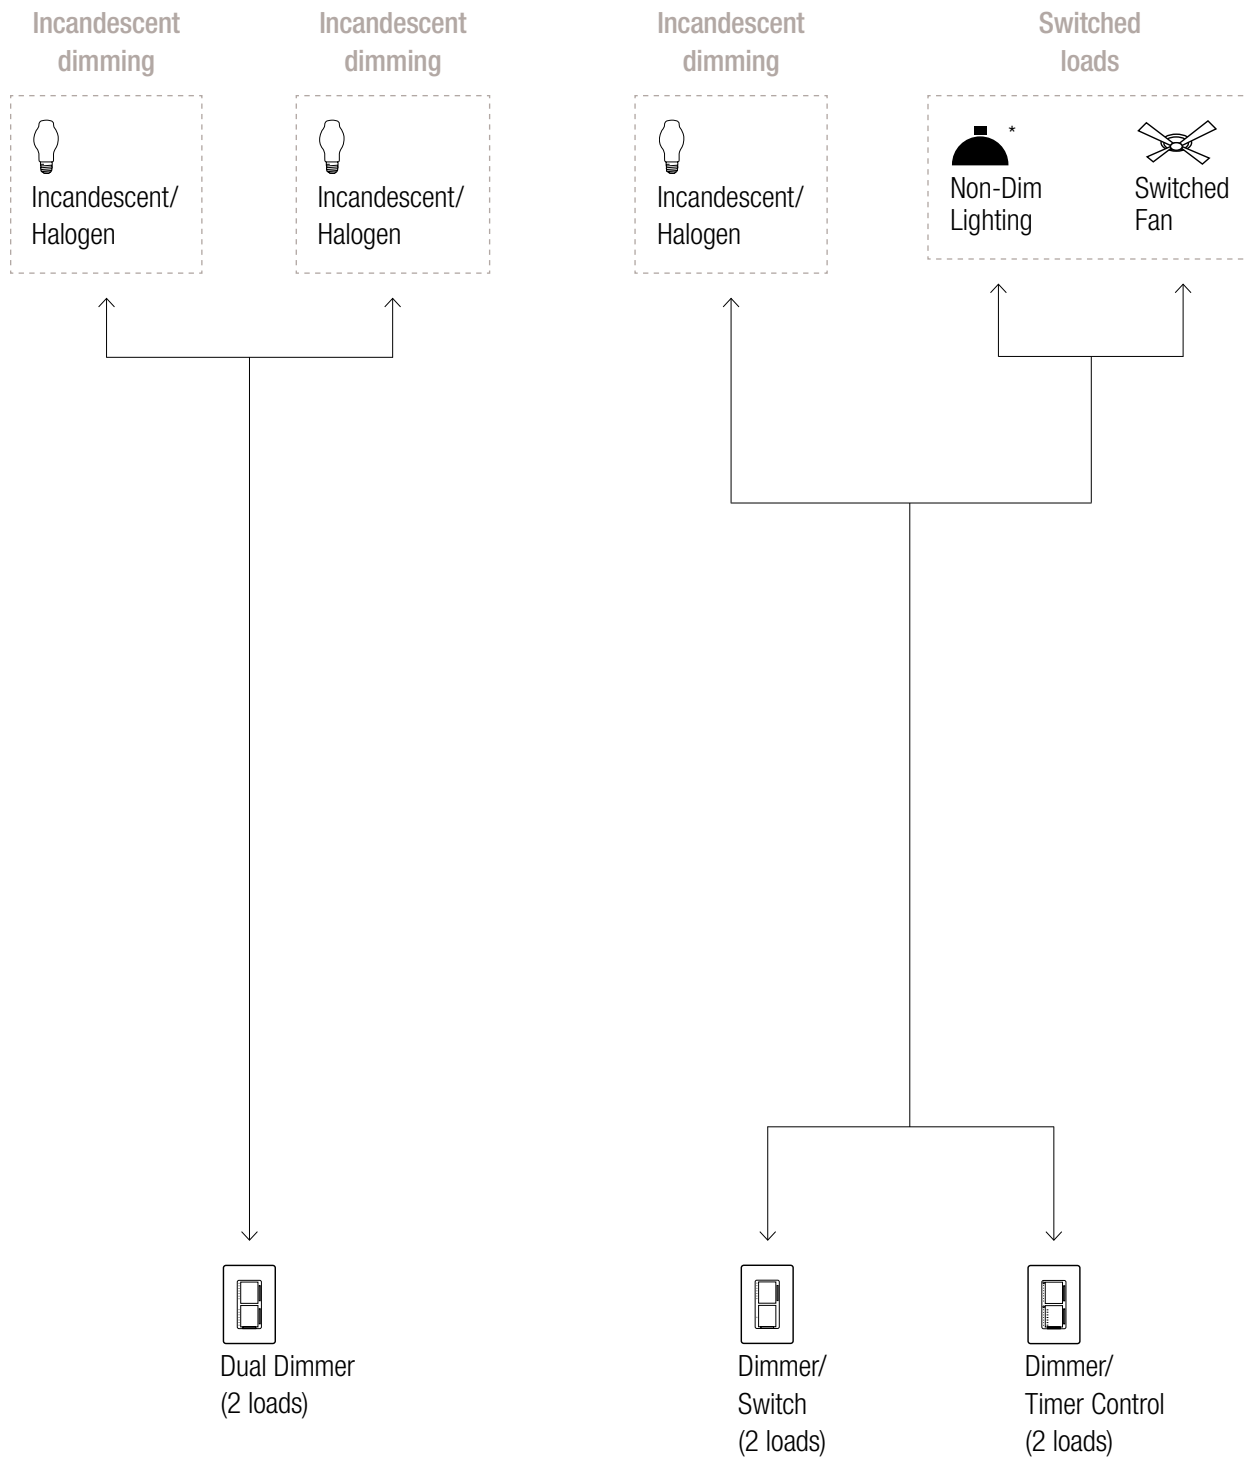

**For illustration purposes only.** Consult model number pages for specific voltage and capacity information.

\*Refer to pg. 54 for specific load type.