






Shown actual size: Nova T[☆]
dimmer in Black (BL) with 1-gang
Architectural wallplate in Clear
Anodized Aluminum (CLA).

Product family features

- Full family of controls plus matching fan controls, switches and wiring devices
- Exclusive dimmer/switch size opening
- Slide adjusts light to suit any activity
- Classic slider, thin profile design
- Voltage compensation maintains stable light levels, despite line voltage variations
- Mechanical air-gap to disconnect load power
- 100% factory tested
- Coordinating wallplate included with Architectural matte finish controls, metal wallplates only available separately
- Custom engraving and custom coloring available for wallplates, see pg. 155


Control types

-  Single-pole (one location)
-  3-way or 4-way (two or more locations)
-  Two-location dimming only (Omnislide™)

Direct load type compatibility

-  Incandescent/halogen lighting
-  Magnetic low-voltage lighting
-  Electronic low-voltage lighting
-  Fluorescent lighting
-  LED lighting
-  Ceiling fans
-  Motorized window treatments (AC)

Load types requiring load interface

-  Neon/cold cathode lighting

Lighting load interfaces may be applicable for some additional load type, voltage and capacity combinations.

For additional information, see pg. 174.

Available finishes

Use **BOLD** color code in model number (Example: NT-600-**SI**)

Architectural matte finishes*



WH
White



LA
Light Almond



AL
Almond



BE
Beige



IV
Ivory



TP
Taupe



GR
Gray



SI
Sienna



BR
Brown



BL
Black

Architectural metal finish wallplates**



BN
Bright Nickel



BC
Bright Chrome



CLA
Clear Anodized
Aluminum



SC
Satin Chrome



SN
Satin Nickel



QZ
Antique Bronze



AU
Gold Plated



BB
Bright Brass



BRA
Brass Anodized
Aluminum



SB
Satin Brass



QB
Antique Brass



BLA
Black Anodized
Aluminum

*Coordinating wallplate included with Architectural matte controls.

**Metal finish wallplates only available separately and include black plastic trim/adaptor, visible from side. Match with separate Black (BL) controls. For wallplate information, see pg. 152.

Dimmers

Slide-to-off dimmers/single-pole



- Slide up to brighten; down to dim
- Standard size dimmer shown
- Higher capacity loads require large controls, see below

Switches and fan controls

Linear-slide switches



- Slide up to on; down to off

Preset dimmers/3-way



- Button turns on/off to slider level
- Slide up to brighten; down to dim
- Higher capacity loads require large controls, see below

Slide-to-off fan controls



- Slide up to increase speed/on; down to decrease speed/off
- Quiet 3-speed available for use with one paddle fan, or fully variable available for use with multiple paddle or exhaust fans
- Quiet 3-speed model designed to prevent motor hum
- Higher capacity loads require large controls, see below

Omnislide two-location slide-to-off dimmers



- Slide up to brighten; down to dim
- Provides true dimming from both locations




Large Control

- Higher capacity dimmers require larger heat sink behind wallplate
- Large controls available as preset dimmer, slide-to-off dimmer or fan control
- Large control measures 4.56 in x 4.56 in
- Requires large wallplate
- Most can fit in a 1-gang electrical backbox


Connections overview

Load connections*


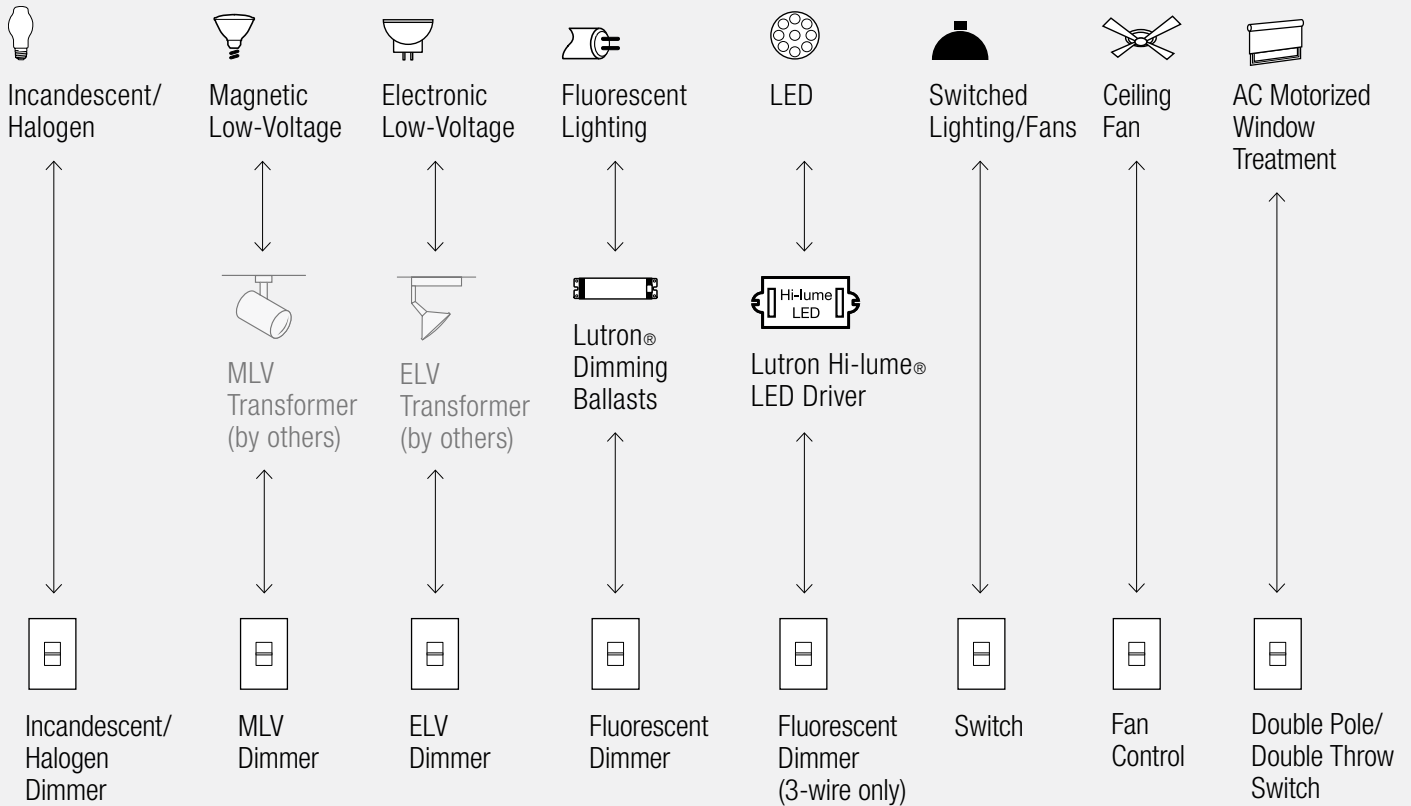


Control types (for 2 or more locations)

Dim from two locations (Incandescent/halogen only)

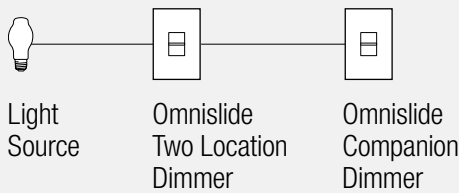

Dim from one location, switch from the others

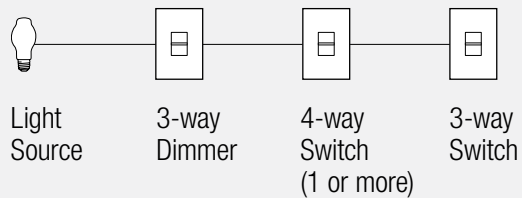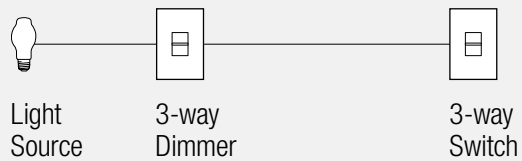

For more information on ballasts, visit www.lutron.com/ballasts.
 For more information on LED drivers, visit www.lutron.com/LED.

*For illustration purposes only. Consult model number pages for specific voltage and capacity information.

Dimmer model numbers



Incandescent/halogen dimmers

(small and large controls)

Slide-to-off dimmers

Single-pole (small) 120V 600W	NT-600- AA ²
Single-pole (small) 120V 1000W	NT-1000- AA ²
Single-pole (large) 120V 1500W	NT-1500- AA ²
Single-pole (large) 120V 1920W	NT-2000- AA ²

NT-2000 dimmers must be ganged with no fins broken. See ganging and derating on pg. 170 for further information.

NT-2000 requires a 2-gang electrical backbox.

Omnislide two-location slide-to-off dimmers

Base unit (small) 120V 600W	NTB-600- AA ²
Base unit (small) 120V 1000W	NTB-1000- AA ²
Auxiliary unit (use with base unit)	NTA-2- AA ²

For two-location incandescent/halogen dimming, use one base unit (NTB-600- or NTB-1000-) with one auxiliary unit (NTA-2-).

Preset dimmers

3-way/single-pole (small) 120V 600W	NT-603P- AA ²
3-way/single-pole (small) 120V 1000W	NT-1003P- AA ²
3-way/single-pole (large) 120V 1500W	NT-1503P- AA ²



Magnetic low-voltage dimmers

(small and large controls)

Slide-to-off dimmers

Single-pole (small) 120V 600VA (450W)	NTLV-600- AA ²
Single-pole (small) 120V 1000VA (800W)	NTLV-1000- AA ²
Single-pole (small)* 277V 600VA (450W)	NTLV-600-277- AA ²
Single-pole (small)* 277V 1000VA (800W)	NTLV-1000-277- AA ²
Single-pole (large) 1500VA (1200W)	NTLV-1500- AA ²

Preset dimmers

3-way/single-pole (small) 120V 600VA (450W)	NTLV-603P- AA ²
3-way/single-pole (small) 120V 1000VA (800W)	NTLV-1003P- AA ²
3-way/single-pole (large) 120V 1500VA (1200W)	NTLV-1503P- AA ²

The stated VA (Volt-Ampere) rating includes the magnetic transformer heat losses and the lamp load. The stated W (Watt) rating is the maximum lamp wattage based on assumed 20% transformer loss.

AA²: Architectural matte color codes, see pg. 27
(1-gang wallplate included)

All models must be derated in standard ganging unless otherwise noted, see pg. 170.

***Requires neutral wire connection.**

Dimmer model numbers

Electronic low-voltage dimmers* (small controls)

Slide-to-off dimmers

Single-pole 120V 300W	NTELV-300- AA ²
Single-pole 120V 600W	NTELV-600- AA ²

Only certain LED drivers are dimmable using an ELV dimmer, for more information visit www.lutron.com/LED.

3-wire fluorescent dimmers* (small control)

Slide-to-off dimmers

Single-pole 120V 16A	NTF-10- AA ²
Single-pole 277V 8A	NTF-10-277- AA ²

Preset dimmers

3-way 120V 8A	NTF-103P- AA ²
3-way 277V 6A	NTF-103P-277- AA ²

For use with Hi-lume[®], Hi-lume[®] Compact SE, Hi-lume[®] 3D, Eco-10[®], EcoSystem[®] ballasts.

Also compatible with Hi-lume[®] LED driver.

No derating required if ganged.

Adjustable low-end trim.

0-10V dimmer (current sink control) (small controls)

Slide-to-off dimmer

Single-pole 30mA max control current	NTFTV- AA ²
---	-------------------------------

Control provides dimming signal only. For dimming with on/off switching, **use with Lutron PowerPack**: PP-120H, PP-277H or PP-347H. Consult ballast manufacturer for specific ballast current draw to determine maximum number of ballasts per control.

For information on using Lutron dimmers to control: Advance Mark VII dimming ballasts, visit www.lutron.com/advance; Universal dimming ballasts, visit www.lutron.com/universal.

No derating required if ganged.

Tu-Wire[®] fluorescent dimmers (small controls)

Slide-to-off dimmers

Single-pole 120V 5A	NTFTU-5A- AA ²
Single-pole* 277V 5A	NTFTU-5A-277- AA ²

Also compatible with Advance Mark X ballasts, for further information visit www.lutron.com/advance.

For information on use with Universal and OSRAM ballasts, contact Technical Support at 1.800.523.9466.

AA²: Architectural matte color codes, see pg. 27
(1-gang wallplate included)

For more information on Lutron ballasts, visit www.lutron.com/ballasts.

All models must be derated if ganged unless otherwise noted, see pg. 170.

*Requires neutral wire connection.

Dimmer model numbers

 **Hi-lume[®] LED drivers:**
3-wire fluorescent dimmers*
(small controls)

Slide-to-off dimmers

Single-pole 120V 16A	NTF-10- AA ²
Single-pole 277V 8A	NTF-10-277- AA ²

Preset dimmers

3-way/single-pole 120V 8A	NTF-103P- AA ²
3-way/single-pole 277V 6A	NTF-103P-277- AA ²


Exclusively compatible with Hi-lume LED driver.

For more information on Hi-lume LED drivers, visit www.lutron.com/HilumeLED.

To control lights from multiple-locations, use 3-way dimmer with NT-3PS- and NT-4PS- or other mechanical switches.

No derating required if ganged.

Adjustable low-end trim.

 **0-10V LED drivers:**
0-10V dimmers (current sink control)
(small controls)

Slide-to-off dimmer

Single-pole 30mA max control current	NTFTV- AA ²
---	-------------------------------

Control provides dimming signal only. For dimming with on/off switching, **use with Lutron PowerPack:** PP-120H, PP-277H or PP-347H.

Consult ballast manufacturer for specific ballast current draw to determine maximum number of ballasts per control.

For compatible 0-10V LED drivers by others, visit www.lutron.com/LED.

No derating required if ganged.

AA²: Architectural matte color codes, see pg. 27 (1-gang wallplate included)

Fan control and switch model numbers

 **Fan controls**
(small and large controls)

Slide-to-off fan control—quiet 3-speed

Single-pole fan control (small) 120V 1.5A	NTFSQ- AA ²
--	-------------------------------

For use with only one ceiling fan.

No derating required if ganged.

Slide-to-off fan controls—fully variable

Single-pole fan control (small) 120V 6A	NTFS-6E- AA ²
Single-pole fan control (large) 120V 12A	NTFS-12E- AA ²

 **Switches**
(small controls)

General purpose switches—all load types

Single-pole 120/277V 20A	NT-1PS- AA ²
3-way 120/277V 20A	NT-3PS- AA ²
4-way 120/277V 20A	NT-4PS- AA ²

Momentary contact 120/277V 30A; 2HP @ 120/240VAC	NT-DPDT-CO-MO- AA ²
--	---------------------------------------

Maintained contact 120/277V 15A; 1/2HP @ 120VAC; 2HP @ 240VAC	NT-DPDT-CO-MA- AA ²
--	---------------------------------------

For 3-way and 4-way switching, use NT-3PS-, NT-4PS- or other mechanical switches.

No derating required if ganged.

All models must be derated in standard ganging unless otherwise noted, see pg. 170.

***Requires neutral wire connection.**

Accessories


Wallplates



Shown actual size: 2-gang Architectural wallplate in White (WH).

For more information about Architectural wallplates, see pg. 152.

Coordinated electrical devices

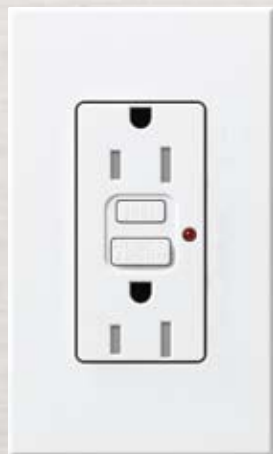

Tamper resistant
GFCI receptacle



Customizable
6-port frame



Cable jack

For more information about coordinated Architectural electrical devices, see pg. 156.



Shown actual size:
Nova T☆ dimmers and
2-gang Architectural
wallplate in White (WH).

Product family features

- Can be used in conjunction with the following dimmer(s) and switch(es): Vareo®, Nova T☆®
- All Lutron® wallplates are screwless, seamless and have no visible hardware, the front plate securely snaps into the alignment adapter plate
- Customize your architectural wallplate with engraving or by adding a corporate logo, contact customer service to get started at 1.888.LUTRON1
- Matte finish wallplates can be custom colored to perfectly match a paint color number, swatch or sample

Ganging and derating

- Architectural wallplates in this section use standard ganging
- Requires fins to be removed from dimmers for proper spacing ("Fins Broken" ganging), see pg. 170
- May require derating (i.e., reduction of dimmer capacity due to fin removal), see Derating Tables, pg. 173
- Custom multi-gang wallplates required for the following cases
 - Full-capacity ganging ("No Fins Broken")
 - Large Nova T☆ controls (1500/2000 W)
 - Nova controls


For further information visit

www.lutron.com/customganging.

Available finishes

Use **BOLD** color code in model number (Example: VWP-1-**SI**)

Architectural matte finishes



WH
White



LA
Light Almond



AL
Almond



BE
Beige



IV
Ivory



TP
Taupe



GR
Gray



SI
Sienna



BR
Brown



BL
Black

Architectural metal finishes*



BN
Bright Nickel



BC
Bright Chrome



CLA
Clear Anodized
Aluminum



SC
Satin Chrome



SN
Satin Nickel



QZ
Antique Bronze



AU
Gold Plated



BB
Bright Brass



BRA
Brass Anodized
Aluminum



SB
Satin Brass



QB
Antique Brass




BLA
Black Anodized
Aluminum

*Metal finish wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls.

Wallplates for Vareo® and Nova T[☆]® dimmers and architectural accessories



1-gang for one switch or dimmer* **VWP-1-AA¹**
 W: 2.75 in (70 mm); H: 4.56 in (116 mm);
 D: .30 in (7.6 mm)



2-gang* **VWP-2R-AA²**
 for two accessories
 W: 4.56 in (116 mm); H: 4.56 in (116 mm);
 D: .30 in (7.6 mm)



1-gang for one accessory* **VWP-R-AA¹**
 W: 2.75 in (70 mm); H: 4.56 in (116 mm);
 D: .30 in (7.6 mm)



3-gang* **VWP-3-AA²**
 for three switches or dimmers
 W: 6.32 in (161 mm); H: 4.56 in (116 mm);
 D: .30 in (7.6 mm)



2-gang* **VWP-2-AA²**
 for two dimmers or switches
 W: 4.56 in (116 mm); H: 4.56 in (116 mm);
 D: .30 in (7.6 mm)




4-gang* **VWP-4-AA²**
 for four switches or dimmers
 W: 8.45 in (215 mm); H: 4.56 in (116 mm);
 D: .30 in (7.6 mm)

AA¹: Architectural matte and Architectural metal color codes, see pg. 153

AA²: Architectural matte color codes, see pg. 153
 For metal finishes, contact Customer Service at 1.800.LUTRON1.

Multi-gang dimmer installations may require derating, see pg. 170.

*Metal finish wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) controls.

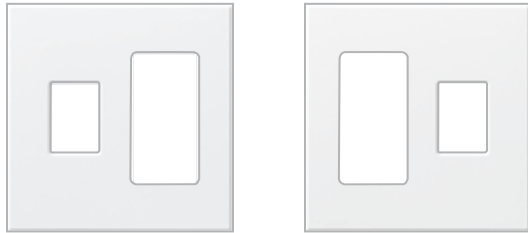

2-gang* VWP-2CR-**AA**²
 for one dimmer or switch and one accessory
 W: 4.56 in (116 mm); H: 4.56 in (116 mm);
 D: .30 in (7.6 mm)

2-gang* VWP-2RC-**AA**²
 for one accessory and one dimmer or switch
 W: 4.56 in (116 mm); H: 4.56 in (116 mm);
 D: .30 in (7.6 mm)

Multiple devices with line and low-voltage can be mounted behind a common wallplate using a standard barrier backbox, see Application Note #213 (Combining Low-Voltage and Line Voltage Wiring Devices in a Multi-Gang Box) at www.lutron.com/applicationnotes.

AA²: Architectural matte color codes, see pg. 153
 For metal finishes, contact Customer Service at 1.800.LUTRON1.

Multi-gang dimmer installations may require derating, see pg. 170.

*Metal finish wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) controls.


Custom Architectural wallplates

Custom configurations, colors, engraving and silkscreenings available. Contact customer service 1.888.LUTRON1.

Custom multi-gang wallplates required for the following cases:

- Multi-gang metal finishes
- Full-capacity ganging ("No Fins Broken")
- Large Nova T☆ controls (1500/2000 W)
- Nova controls

For further information, visit www.lutron.com/customganging.

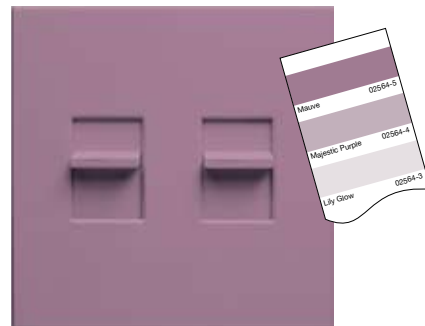

Custom coloring available for all Architectural matte finish wallplates.



Custom engraving available for all Traditional, Designer, Architectural and New Architectural style wallplates (except Stainless Steel).

For wallplate engraving schedules, go to www.lutron.com/engraving.

Cable jack



- F-style, 75-Ohm coaxial cable
- Includes 1-gang wallplate

Single cable jack*

NT-CJ-**AA**²

Telephone jack



- 6-conductor jack, RJ11
- Includes 1-gang wallplate

Single telephone jack*

NT-PJ-**AA**²

Double and triple telephone jacks



- 8-conductor jack, RJ45 category 5 phone jack
- Includes 1-gang wallplate



Double telephone jack*†

NT-PJ8X2-**AA**²

Triple telephone jack*†

NT-PJ8X3-**AA**²

Telephone/cable jack



- 8-conductor jack, RJ45 category 5 phone jack
- F-style, 75-Ohm coaxial cable jack
- Includes 1-gang wallplate

Telephone/cable jack*†

NT-PJ8CJ-**AA**²

Multiple devices with line and low-voltage can be mounted behind a common wallplate using a standard barrier backbox, see Application Note #213 (Combining Low-Voltage and Line Voltage Wiring Devices in a Multi-Gang Box) at www.lutron.com/applicationnotes.

AA²: Architectural matte color codes, see pg. 153 (1-gang wallplate included)

*Metal finishes are only available as separate wallplates. Match with separate Black (BL) controls and accessories.

†Ivory, White, Beige and Taupe controls will ship with White coordinating jacks; Brown, Black, Gray and Metal finish controls will ship with Black coordinating jacks.

Receptacles



- Includes 1-gang wallplate

Tamper resistant receptacles

15A, 125V*	NTR-15-TR- AA ²
20A, 125V*	NTR-20-TR- AA ²

Isolated ground receptacles



- Receptacle is orange for easy ID and circuit delineation
- Wallplate will match color that is ordered
- Includes 1-gang wallplate

15A, 125V*	NTR-15-IG-OR- AA ²
20A, 125V*	NTR-20-IG-OR- AA ²

GFCI receptacles



- Press test button to confirm LED indicator status
- Press reset button to reset GFCI after circuit interruption
- Includes 1-gang wallplate

Tamper resistant GFCI receptacles

15A, 125V*	NTR-15-GFTR- AA ²
20A, 125V*	NTR-20-GFTR- AA ²

AA²: Architectural matte color codes, see pg. 153 (1-gang wallplate included)

*Metal finishes are only available as separate wallplates. Match with separate Black (BL) controls and accessories.

Receptacles for dimming use



- Duplex for dimming both connected loads
- Projecting nubs prevent standard plugs from being used
- Requires replacement plugs for dimming use
- 15A model shown
- Includes 1-gang wallplate

Duplex for dimming use

15 A	120/125V*	NTR-15-DFDU- AA ²
20 A	120/125V*	NTR-20-DFDU- AA ²

Receptacles for dimming use



- Top half for dimming
- Projecting nub prevents standard plug from being used
- Requires replacement plugs for dimming use
- Bottom half is a general use receptacle and will fit standard duplex plugs
- 15A model shown
- Includes 1-gang wallplate

Split duplex (half for dimming use)

15 A	120/125V*	NTR-15-HFDU- AA ²
20 A	120/125V*	NTR-20-HFDU- AA ²

Receptacles for dimming use



- Duplex for dimming both connected loads
- Projecting nubs prevent standard plugs from being used
- Requires replacement plugs for dimming use
- 15A model shown
- Includes 1-gang wallplate
- Tamper resistant shutter mechanism

Dual dimming tamper resistant

15 A	120/125V*	NTR-15-DDTR- AA ²
20 A	120/125V*	NTR-20-DDTR- AA ²

Receptacles for dimming use



- Top half for dimming
- Projecting nub prevents standard plug from being used
- Requires replacement plugs for dimming use
- Bottom half is a general use receptacle and will fit standard duplex plugs
- 15A model shown
- Includes 1-gang wallplate
- Tamper resistant shutter mechanism

Half dimming tamper resistant

15 A	120/125V*	NTR-15-HDTR- AA ²
20 A	120/125V*	NTR-20-HDTR- AA ²

AA²: Architectural matte color codes, see pg. 153 (1-gang wallplate included)

*Metal finishes are only available as separate wallplates. Match with separate Black (BL) controls and accessories.

Replacement plugs for dimming (use with receptacles)



- This plug required for use with Lutron® receptacles for dimming use—plug will work in standard receptacle
- Easily replaces the existing plugs on lamps

120/125V White	RP-FDU-10-WH
120/125V Brown	RP-FDU-10-BR

UL/CSA/NOM regulatory approvals

Important application notes:

- Receptacles and plugs for dimming use are UL listed for use with all Lutron wallbox dimmers included in this catalog
- If there is only one electrical feed to the receptacle, then the duplex DFDU must be used
- If the hot and dimmed hot feeds to the split duplex HFDU are supplied from different circuits or split-wired, with separate switch-legs, a means to simultaneously disconnect these circuits must be provided at the panel board where they originate (NEC 210.7(C) 2002 Edition). A 2-pole circuit breaker or two single-pole circuit breakers with an approved handle tie can be used to accomplish this simultaneous disconnect. Feed-through dimming panels, which are those without breakers, are recommended when using the HFDU.
- For detailed information, see Application Notes #91 (Guide to Dimming Table Lamps) and #109 (Guide to Dimming Portable Lamps via Receptacles) at www.lutron.com/applicationnotes

AA²: Architectural matte color codes, see pg. 153 (1-gang wallplate included)

*Metal finishes are only available as separate wallplates. Match with separate Black (BL) controls and accessories.

Field customizable 6-port frame




- Shipped with six blanks in matching colors
- Connectors sold separately
- Connectors snap in (no tools required)
- Includes 1-gang wallplate
- Connectors available in White (WH) only unless noted

Multiple devices with line and low-voltage can be mounted behind a common wallplate using a standard barrier backbox, see Application Note #213 (Combining Low-Voltage and Line Voltage Wiring Devices in a Multi-Gang Box) at www.lutron.com/applicationnotes.





6-port frame*	NT-6PF- AA ²
---------------	--------------------------------

Connectors for 6-port frame

Telephone/network jacks

 8-conductor, RJ45 category 3	CON-1P-C3- EE ⁴
8-conductor, RJ45 category 5e	CON-1P-C5E- EE ⁴
8-conductor, RJ45 category 6	CON-1P-C6- EE ⁴


Fiber jacks

 MT-RJ feed through	CON-1F-MTRJ-WH
 SC simplex	CON-1F-SC-WH
 LC non-flush mount	CON-1F-LC-WH
 ST style	CON-1F-ST-WH

Cable jack

 F-style, 75-Ohm coaxial cable	CON-1C- EE ⁴
---	--------------------------------

BNC jack

 BNC connector, 50-Ohm	CON-1B-WH
---	-----------

Connectors only for use with 6-port frame.

AA²: Architectural matte color codes, see pg. 153
EE⁴: Only available in White (WH) and Black (BL)

*Metal finishes are only available as separate wallplates. Match with separate Black (BL) controls and accessories.

How to understand ganging and derating

Standard ganging

Ganging is the side-by-side mounting of two or more dimmers or accessory devices under a multi-gang wallplate.

Standard multi-gang installation:

- Uses standard multi-gang electrical backboxes
- Uses standard multi-gang wallplates
- Requires fins to be removed from dimmers for proper spacing (“Fins Broken” ganging)
- May require derating (i.e., reduction of dimmer capacity due to fin removal), see Derating Tables, pgs. 172–173

Custom ganging for Architectural style controls

For Architectural style dimmers and switches, it is possible to retain the maximum capacity of dimmers in multi-gang applications via custom architectural multi-gang:

- May require customized, wider-than-standard wallplates
- May require wider-than-standard electrical backboxes
- Allows full capacity (“No Fins Broken”) ganging
- Required for Nova® dimmers and for larger width (high capacity) architectural controls
- Visit www.lutron.com/customganging for additional information

Standard ganging for dimmers, switches and accessories

New Architectural



pg. 148

Architectural



pg. 152

Designer



pg. 160

Traditional



pg. 166



Vierti®



Vareo®
Nova T☆®



Maestro®
Maestro IR®
Maestro Wireless®
Spacer System®
Diva®
Lyneo® Lx
Skylark®
Skylark Contour™



Abella®
Ceana®
Ariadni®
Glyder®
Rotary


Derating Table 1
pg. 172

Derating Table 2
pg. 173


Derating Table 1
pg. 172

Derating Table 1
pg. 172

Standard ganging and fins broken derating examples:

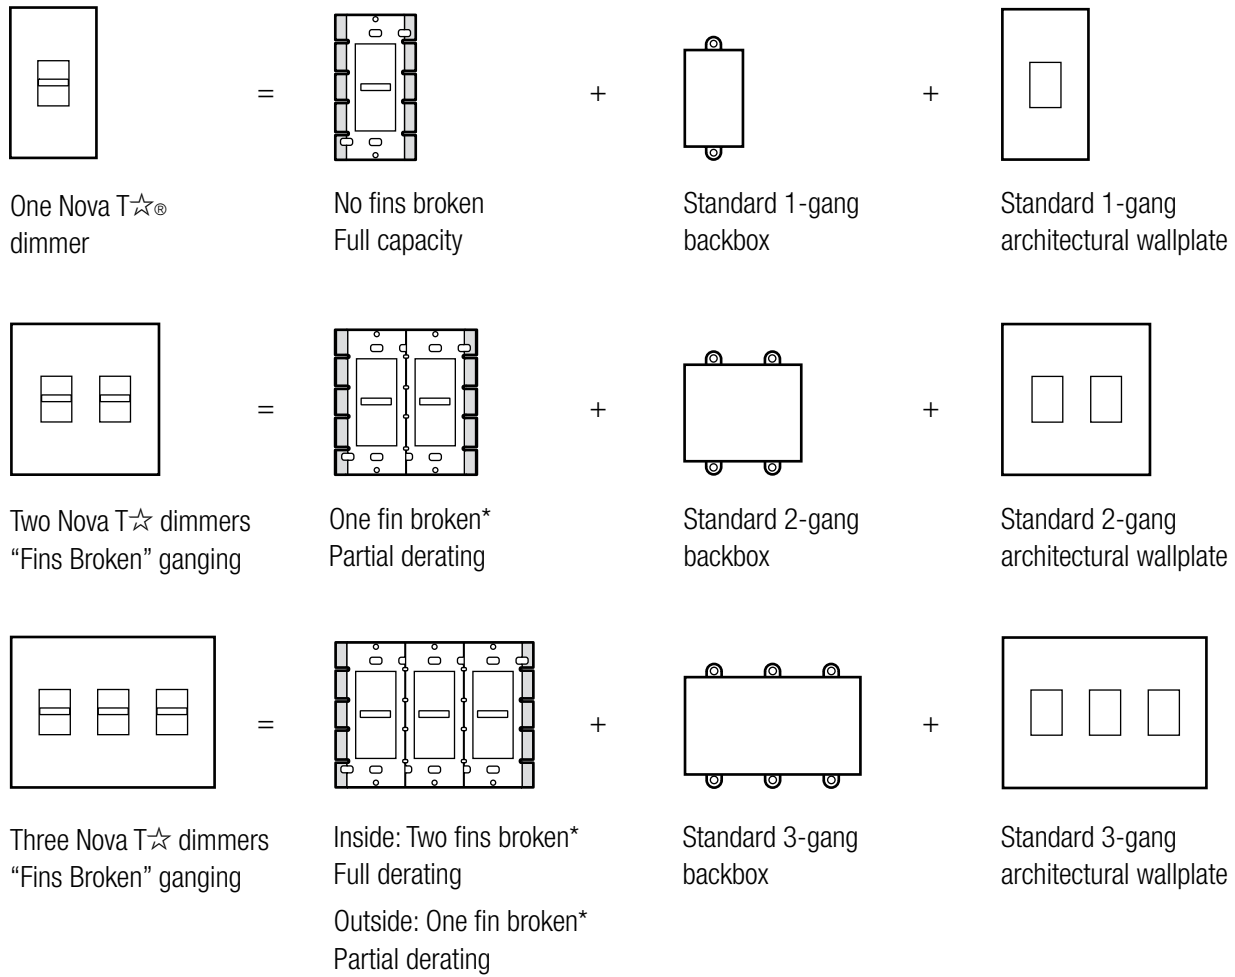

Custom Architectural ganging example:

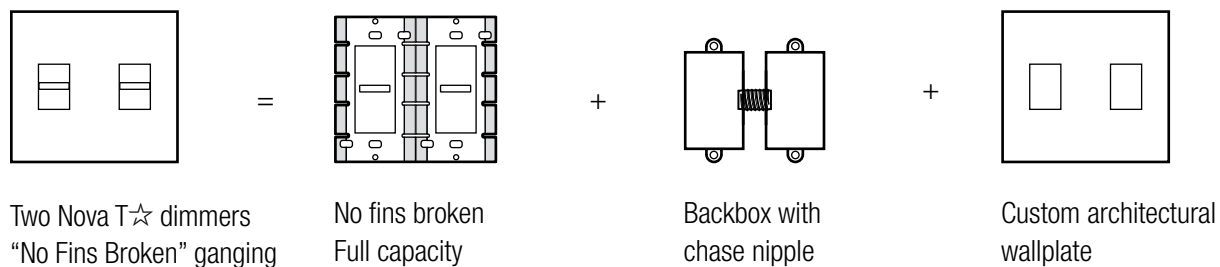

For further information on ganging and derating, visit www.lutron.com/multigang.

*The fins are scored and designed to be removed easily.

Derating Table 1

New Architectural | Verti®

Designer | Maestro®, Maestro IR®, Maestro Wireless®, Spacer System®, Diva®, Lyneo® Lx, Skylark Contour™, Skylark®

Traditional | Abella®, Ceano®, Ariadni®, Glyder®, Rotary



No fins broken



1 fin broken



2 fins broken

	No fins broken	1 fin broken	2 fins broken
Incandescent			
Dimmers	600W	500W	400W
	1000W	800W	650W
Dual dimmers	300W	250W	200W
	300W	250W	200W
Magnetic low-voltage			
Dimmers	600VA/450W	500VA/400W	400VA/300W
	1000VA/800W	800VA/650W	650VA/500W
Electronic low-voltage			
Dimmers	300W	250W	200W
	500W	450W	400W
	600W	500W	400W
Fluorescent			
Hi-lume®/Hi-lume® Compact SE/Eco-10®/EcoSystem®			
Verti	60 ballasts/6A	50 ballasts/5A	35 ballasts/3.5A
Maestro/Spacer System	20 ballasts/6A	20 ballasts/5A	20 ballasts/3.5A
Diva, Skylark, Lyneo Lx and Ariadni	no derating	no derating	no derating
Tu-Wire®: Spacer System, Diva, Skylark	5A	4A	3.3A
Fan controls			
Quiet 7-speed	1.0A/300W	1.0A/300W	1.0A/300W
Quiet 3-speed	1.5A	1.5A	1.5A
Fully variable	5A	4A	3A
Fan/light controls			
Quiet 7-speed	1.0A/300W	1.0A/300W	1.0A/300W
Quiet 3-speed	1.5A/300W	1.5A/300W	1.5A/300W
	1.5A/360W	1.5A/360W	1.5A/360W
Fully variable	2.5A/300W	2.1A/250W	1.7A/200W
Electronic switches			
Verti	6A/3A	5A/3A	3.5A/3A
Maestro (light/fan)	8A/3A	6.5A/3A	5A/3A
Abella (light/fan)	6A/3A	5A/3A	3.5A/3A

Derating Table 2

Architectural | Vareo®, Nova T☆®



No fins broken



1 fin broken



2 fins broken

	No fins broken	1 fin broken	2 fins broken
Incandescent			
Dimmers	600W	500W	300W
	1000W	900W	700W
	1500W	1250W	1000W
	1950W	–	–
Magnetic low-voltage			
Dimmers	600 VA/450 W	500 VA/400 W	300 VA/250 W
	1000 VA/800 W	900 VA/750 W	700 VA/500 W
	1500 VA/1200 W	1250 VA/1000 W	1000 VA/800 W
Electronic low-voltage			
Dimmers	300W	300W	250W
	600W	500W	400W
Fluorescent			
Hi-lume®/Hi-lume® Compact SE/Eco-10®/EcoSystem®			
Vareo	20 ballasts /8 A	20 ballasts /6 A	20 ballasts /4.5 A
Nova T☆	6 A	no derating	no derating
	8 A	no derating	no derating
	16 A	no derating	no derating
0-10VDC control ¹	30mA ballasts	no derating	no derating
Tu-Wire®	5 A	4 A	3.3 A
Fan controls			
Quiet 3-speed	1.5 A	no derating	no derating
Fully variable	6 A	4.2 A	2.5 A
Fully variable	12 A	10 A	8.3 A
Electronic tapswitches²			
VETS-1000-	1000W	800W	650W
VETS-1000-SL-	1000W	900W	700W
VETN-1000-	1000 VA	700 VA	550 VA

For further information on ganging Nova®, visit www.lutron.com/customganging.

¹PowerPack required for line voltage switching.

²VETS-R-Auxiliary electronic tapswitches do not require derating.

Dimmer capabilities and interface requirements

- M** Multi-location—true dimming from each location
- E** eco-model available
- Compatible dimmer (no interface)
- WBX** **TVI** **3F** **PA** Requires interface, see notes below



Dimmers	capacity†	M				
Incandescent/halogen 120V	600W				M	
	1000W				M	
	1500W			WBX		
	2000W			WBX		
Magnetic low-voltage 120V	600 VA (450W)					
	1000 VA (800W)					
	1500 VA (1200W)			WBX		
	2000 VA (1600W)			WBX	WBX	
Magnetic low-voltage 277V	600 VA (450W)			WBX		WBX
	1000 VA (800W)			WBX		WBX
Electronic low-voltage 120V	300W			WBX		
	450W			WBX	WBX	
	600W			WBX		WBX
Electronic low-voltage 277V	16A			WBX	WBX	WBX
Neon/cold cathode				WBX	WBX	
3-wire ballasts and Hi-lume® LED driver 120V	6A					
	Hi-lume, Hi-lume Compact SE,	8A				
	Eco-10® and EcoSystem® ballasts	16A			3F	
3-wire ballasts and Hi-lume LED driver 277V	6A			3F		
	Hi-lume, Hi-lume Compact SE,	8A			3F	
	Eco-10 and EcoSystem ballasts	16A			3F	3F
					3F	3F
Tu-Wire® ballasts 120V	5A			PA		
0-10VDC (ballasts or LED Drivers) 120/277V	16A	TVI	TVI			

WBX: Wallbox Phase Adaptive Power Module (PHPM-WBX-DV-WH)

3F: Fluorescent Power Module (PHPM-3F-DV-WH)

TVI: 0-10V Interface (GRX-TVI)

PA: Phase Adaptive Power Module (PHPM-PA-DV-WH)

See pgs. 178–179 for specific compatible dimmer models and switching interface solutions.

*Consult Lutron Technical Support for information on interfaces with Vierti.

†UL listed for FULL wattage indicated (derate capacity only if ganged with other devices).


Dimmer capabilities and interface requirements

M Multi-location—true dimming from each location

E eco-model available

 Compatible dimmer (no interface)

WBX **TVI** **3F** **PA** Requires interface, see notes below

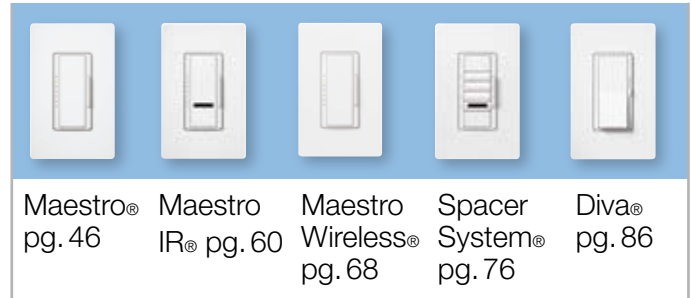

Dimmers	capacity†	M	M	M	M	
 Incandescent/halogen 120V	600W	E				E
	1000W					
	1500W	WBX		WBX	WBX	WBX
	2000W	WBX		WBX	WBX	WBX
 Magnetic low-voltage 120V	600VA (450W)					
	1000VA (800W)					
	1500VA (1200W)	WBX		WBX	WBX	WBX
	2000VA (1600W)	WBX		WBX	WBX	WBX
 Magnetic low-voltage 277V	600VA (450W)	WBX		WBX	WBX	WBX
	1000VA (800W)	WBX		WBX	WBX	WBX
 Electronic low-voltage 120V	300W			WBX		
	450W			WBX		WBX
	600W			WBX		WBX
 Electronic low-voltage 277V	16A	WBX		WBX	WBX	WBX
 Neon/cold cathode				WBX		WBX
 3-wire ballasts and Hi-lume® LED driver 120V	6A					
	Hi-lume, Hi-lume Compact SE, Eco-10® and EcoSystem® ballasts	8A	3F		3F	3F
	16A	3F		3F	3F	3F
 3-wire ballasts and Hi-lume LED driver 277V	6A					
	Hi-lume, Hi-lume Compact SE, Eco-10 and EcoSystem ballasts	8A	3F		3F	3F
	16A	3F		3F	3F	3F
 Tu-Wire® ballasts 120V	5A	PA		PA		
 0-10VDC (ballasts or LED Drivers) 120/277V	16A	TVI		TVI	TVI	TVI

WBX: Wallbox Phase Adaptive Power Module (PHPM-WBX-DV-WH)

3F: Fluorescent Power Module (PHPM-3F-DV-WH)

TVI: 0-10V Interface (GRX-TVI)

PA: Phase Adaptive Power Module (PHPM-PA-DV-WH)

See pgs. 178–179 for specific compatible dimmer models and switching interface solutions.

†UL listed for FULL wattage indicated (derate capacity only if ganged with other devices).

Dimmer capabilities and interface requirements

M Multi-location—true dimming from each location

E eco-model available

 Compatible dimmer (no interface)

WBX **TVI** **3F** **PA** Requires interface, see notes below

					
		Lyneo® Lx pg. 94	Skylark Contour™ pg. 100	Skylark® pg. 104	Abella® pg. 114
Dimmers	capacity†				M
 Incandescent/halogen 120V	600W		E	E	
	1000W				
	1500W	WBX		WBX	
	2000W	WBX		WBX	
 Magnetic low-voltage 120V	600 VA (450W)				
	1000 VA (800W)			WBX	
	1500 VA (1200W)	WBX		WBX	
	2000 VA (1600W)	WBX		WBX	
 Magnetic low-voltage 277V	600 VA (450W)	WBX		WBX	
	1000 VA (800W)	WBX		WBX	
 Electronic low-voltage 120V	300W				
	450W			WBX	
	600W			WBX	
 Electronic low-voltage 277V	16A	WBX		WBX	
 Neon/cold cathode		WBX		WBX	
 3-wire ballasts and Hi-lume® LED driver 120V	6A				
	Hi-lume, Hi-lume Compact SE, Eco-10® and EcoSystem® ballasts	8A			
		16A	3F		3F
 3-wire ballasts and Hi-lume LED driver 277V	6A				
	Hi-lume, Hi-lume Compact SE, Eco-10 and EcoSystem ballasts	8A	3F		3F
		16A	3F		3F
 Tu-Wire® ballasts 120V	5A	PA			
 0-10VDC (ballasts or LED Drivers) 120/277V	16A	TVI		TVI	

WBX: Wallbox Phase Adaptive Power Module (PHPM-WBX-DV-WH)

3F: Fluorescent Power Module (PHPM-3F-DV-WH)

See pgs. 178–179 for specific compatible dimmer models and switching interface solutions.

TVI: 0-10V Interface (GRX-TVI)

PA: Phase Adaptive Power Module (PHPM-PA-DV-WH)

†UL listed for FULL wattage indicated (derate capacity only if ganged with other devices).

Dimmer capabilities and interface requirements

- M** Multi-location—true dimming from each location
- E** eco-model available
- Compatible dimmer (no interface)
- WBX** **TVI** **3F** **PA** Requires interface, see notes below



Dimmers	capacity†				
 Incandescent/halogen 120V	600W		E		E
	1000W				
	1500W		WBX		
	2000W		WBX		
 Magnetic low-voltage 120V	600 VA (450W)				
	1000 VA (800W)				
	1500 VA (1200W)		WBX		
	2000 VA (1600W)		WBX		
 Magnetic low-voltage 277V	600 VA (450W)		WBX		
	1000 VA (800W)		WBX		
 Electronic low-voltage 120V	300W		WBX		
	450W		WBX		
	600W		WBX		
 Electronic low-voltage 277V	16A		WBX		
 Neon/cold cathode			WBX		
 3-wire ballasts and Hi-lume® LED driver 120V	6A				
	Hi-lume, Hi-lume Compact SE, Eco-10® and EcoSystem® ballasts	8A			
		16A		3F	
 3-wire ballasts and Hi-lume LED driver 277V	6A				
	Hi-lume, Hi-lume Compact SE, Eco-10 and EcoSystem ballasts	8A		3F	
		16A		3F	
 Tu-Wire® ballasts 120V	5A		PA		
 0-10VDC (ballasts or LED Drivers) 120/277V	16A		TVI		

WBX: Wallbox Phase Adaptive Power Module (PHPM-WBX-DV-WH)

3F: Fluorescent Power Module (PHPM-3F-DV-WH)

See pgs. 178–179 for specific compatible dimmer models and switching interface solutions.

TVI: 0-10V Interface (GRX-TVI)

PA: Phase Adaptive Power Module (PHPM-PA-DV-WH)

†UL listed for FULL wattage indicated (derate capacity only if ganged with other devices).



Dimmer models/load interface compatibility

	Incandescent, magnetic and electronic low-voltage (120/277 V)		3-wire Fluorescent ballasts or Hi-lume® LED drivers (120/277 V)		0-10VDC Ballasts or LED drivers (120/277 V)	
	WBX 		3F 		TVI 	
	Wallbox Phase Adaptive Power Module* PHPM-WBX-DV-WH		Fluorescent Power Module* PHPM-3F-DV-WH		0-10V Interface GRX-TV1	
Dimmer Family	Single-pole	3-way or multi-location	Single-pole	3-way or multi-location	Single-pole	3-way or multi-location
Abella®	–	–	–	–	–	–
Ariadni®	–	AYF-103P-	–	AYF-103P-	–	AYF-103P-
Ceana®	–	–	–	–	–	–
Diva® Gloss	–	DVF-103P-	–	DVF-103P-	–	DVF-103P-
Diva Satin Colors®	–	DVSCF-103P-	–	DVSCF-103P-	–	DVSCF-103P-
Glyder®	–	–	–	–	–	–
Lyneo® Lx	–	LXF-103PL-	–	LXF-103PL-	–	LXF-103PL-
Maestro® Gloss	–	MAF-6AM-	–	MAF-6AM-	–	MAF-6AM-
Maestro® Satin Colors®	–	MSCF-6AM-	–	MSCF-6AM-	–	MSCF-6AM-
Maestro Wireless®	–	MRF2-F6AN-DV-	–	MRF2-F6AN-DV-	–	MRF2-F6AN-DV-
Nova®	NF-10-	NF-103P-	NF-10-	NF-103P-	NF-10-	NF-103P-
Nova T☆®	NTF-10-	NTF-103P-	NTF-10-	NTF-103P-	NTF-10-	NTF-103P-
Skylark®	SF-10P-	SF-103P-	SF-10P-	SF-103P-	SF-10P-	SF-103P-
Spacer System®	–	SPSF-6AM-	–	SPSF-6AM-	SPSF-S6A-	SPSF-6AM-
Vareo®	–	VF-10-	–	VF-10-	–	VF-10-
Vierti®	contact Lutron		contact Lutron		–	VTF-6AM-

Use only dimmer model numbers listed.

*Dual 120/277 V model given, 120V only versions are also available. Please see Technical notes, pg. 179.

Dimmer models/load interface compatibility

	Tu-Wire® Fluorescent Ballasts (120V)		Switched Lighting (120/277V)	
	PA 		SW 	
	Phase Adaptive Power Module* PHPM-PA-DV-WH		Switching Power Module* PHPM-SW-DV-WH	
Dimmer Family	Single-pole	3-way or multi-location	Single-pole	3-way or multi-location
Abella®	–	–	–	AB-S6AM-
Ariadni®	–	AYF-103P-	–	–
Ceana®	–	–	–	–
Diva® Gloss	–	DVF-103P-	–	–
Diva Satin Colors®	–	DVSCF-103P-	–	–
Glyder®	–	–	–	–
Lyneo® Lx	–	LXF-103PL-	LX-1PSL-	LX-3PSL-
Maestro® Gloss	–	MAF-6AM-	–	MA-S8AM-
Maestro® Satin Colors®	–	MSCF-6AM-	–	MSC-S8AM-
Maestro Wireless®	–	MRF2-F6AN-DV-	–	MRF2-6ANS-
Nova®	NF-10-	NF-103P-	–	–
Nova T☆®	NTF-10-	NTF-103P-	–	–
Skylark®	SF-10P-	SF-103P-	–	–
Spacer System®	SPSF-S6A-	SPSF-6AM-	SPSF-S6A-	SPSF-S6AM-
Vareo®	–	VF-10-	–	VETN-1000-
Vierti®	contact Lutron		contact Lutron	

Technical notes

- Lighting load interfaces must be matched to load type and voltage
- All load interfaces for dimmed load are controlled by a 120V 3-wire fluorescent dimmer
- Power feed to dimmer may differ from lighting load/interface voltage
- Interfaces typically require additional power feeds
- For wiring information, consult wiring diagrams, see pgs. 193-195
- For assistance and additional solutions, consult Lutron Technical Support at 1.800.523.9466 (24 hours/7 days)


Interface mounting

- PHPM interfaces mount to 2-gang electrical backbox (W: 6.30 in x H: 5.10 in)
- GRX-TVI enclosure is surface mount only (W: 6.10 in x H: 12.50 in x D: 3.30 in)

Use only dimmer model numbers listed.

*Dual 120/277V model given, 120V only versions are also available. Please see Technical notes, pg. 179.

Nova T[☆]

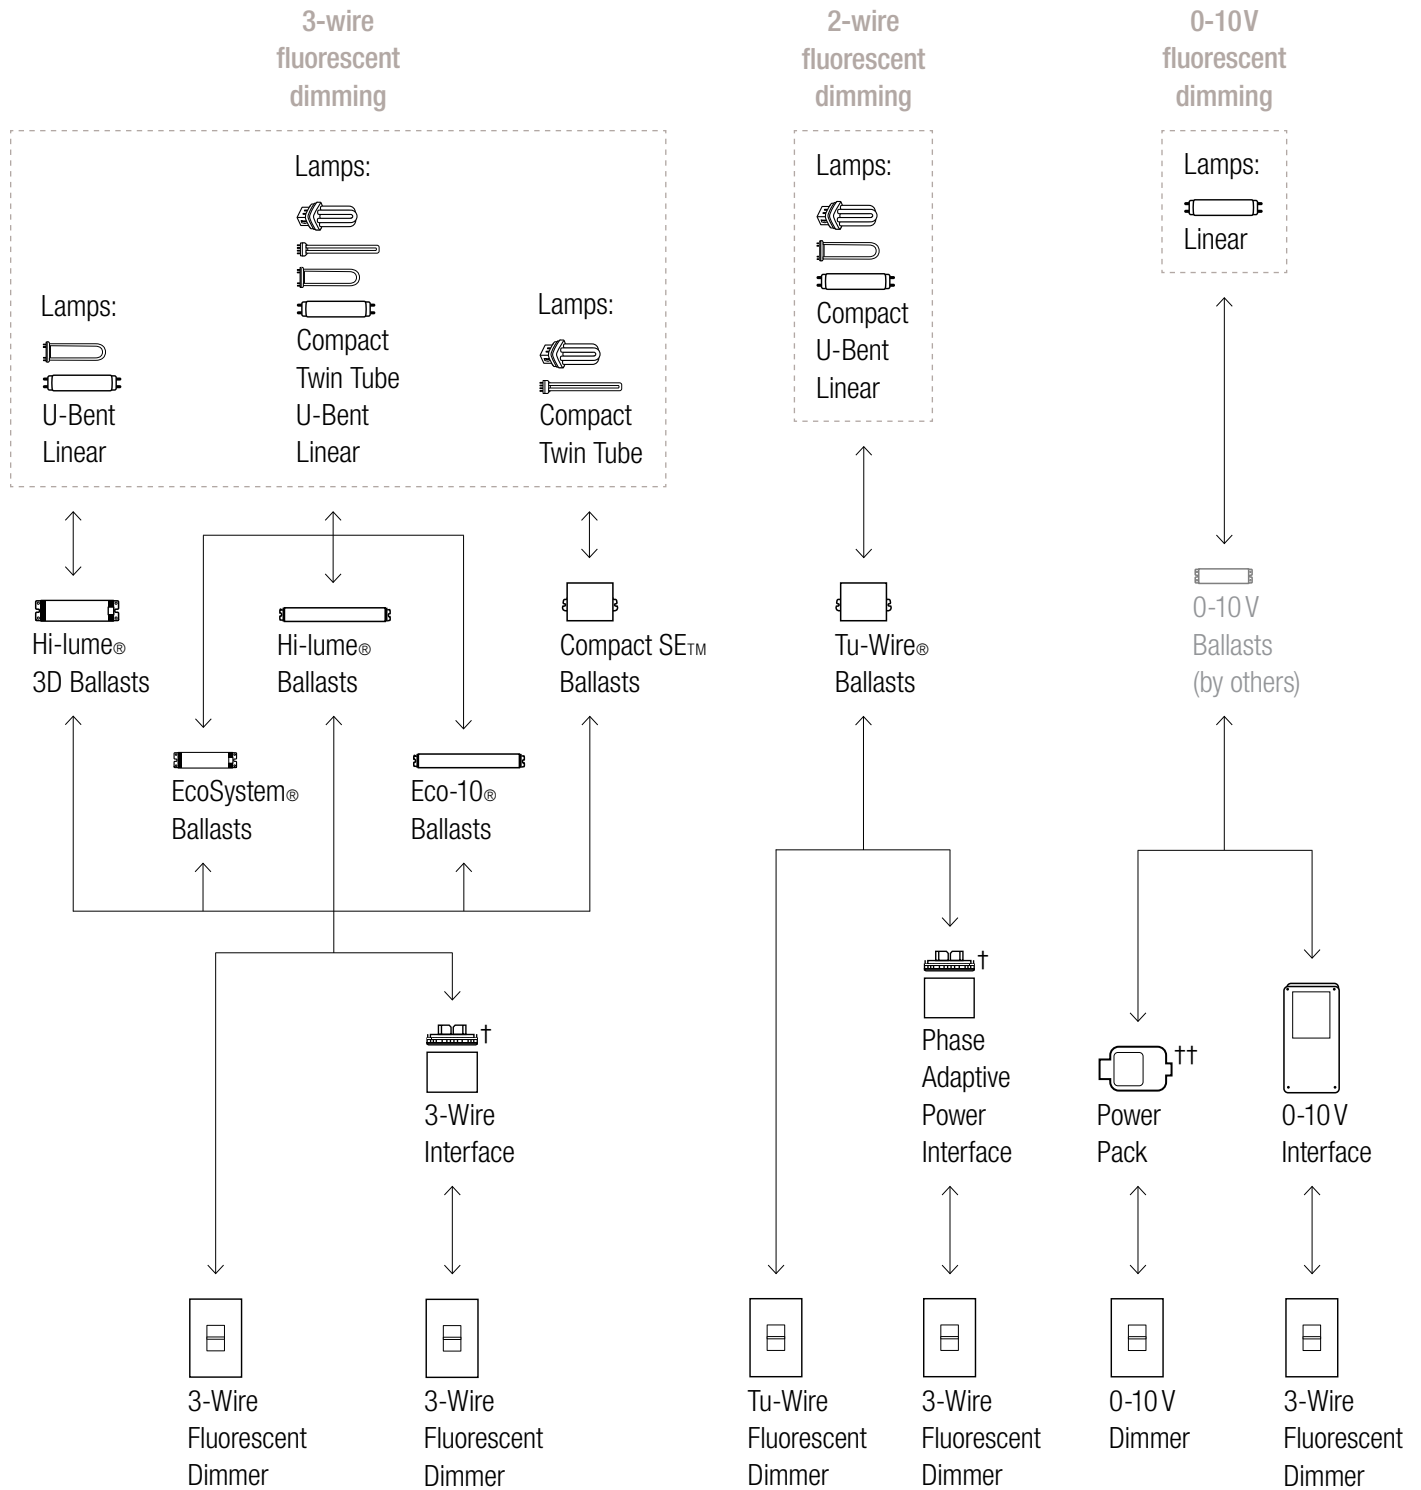


For illustration purposes only. Consult model number pages for specific voltage and capacity information.

For ballast information, visit www.lutron.com/ballasts.

[†]Interface provides additional capacity and/or may be different voltage than dimmer.

^{††}PowerPack provides on/off switching to 0-10V load.

Nova T[☆]

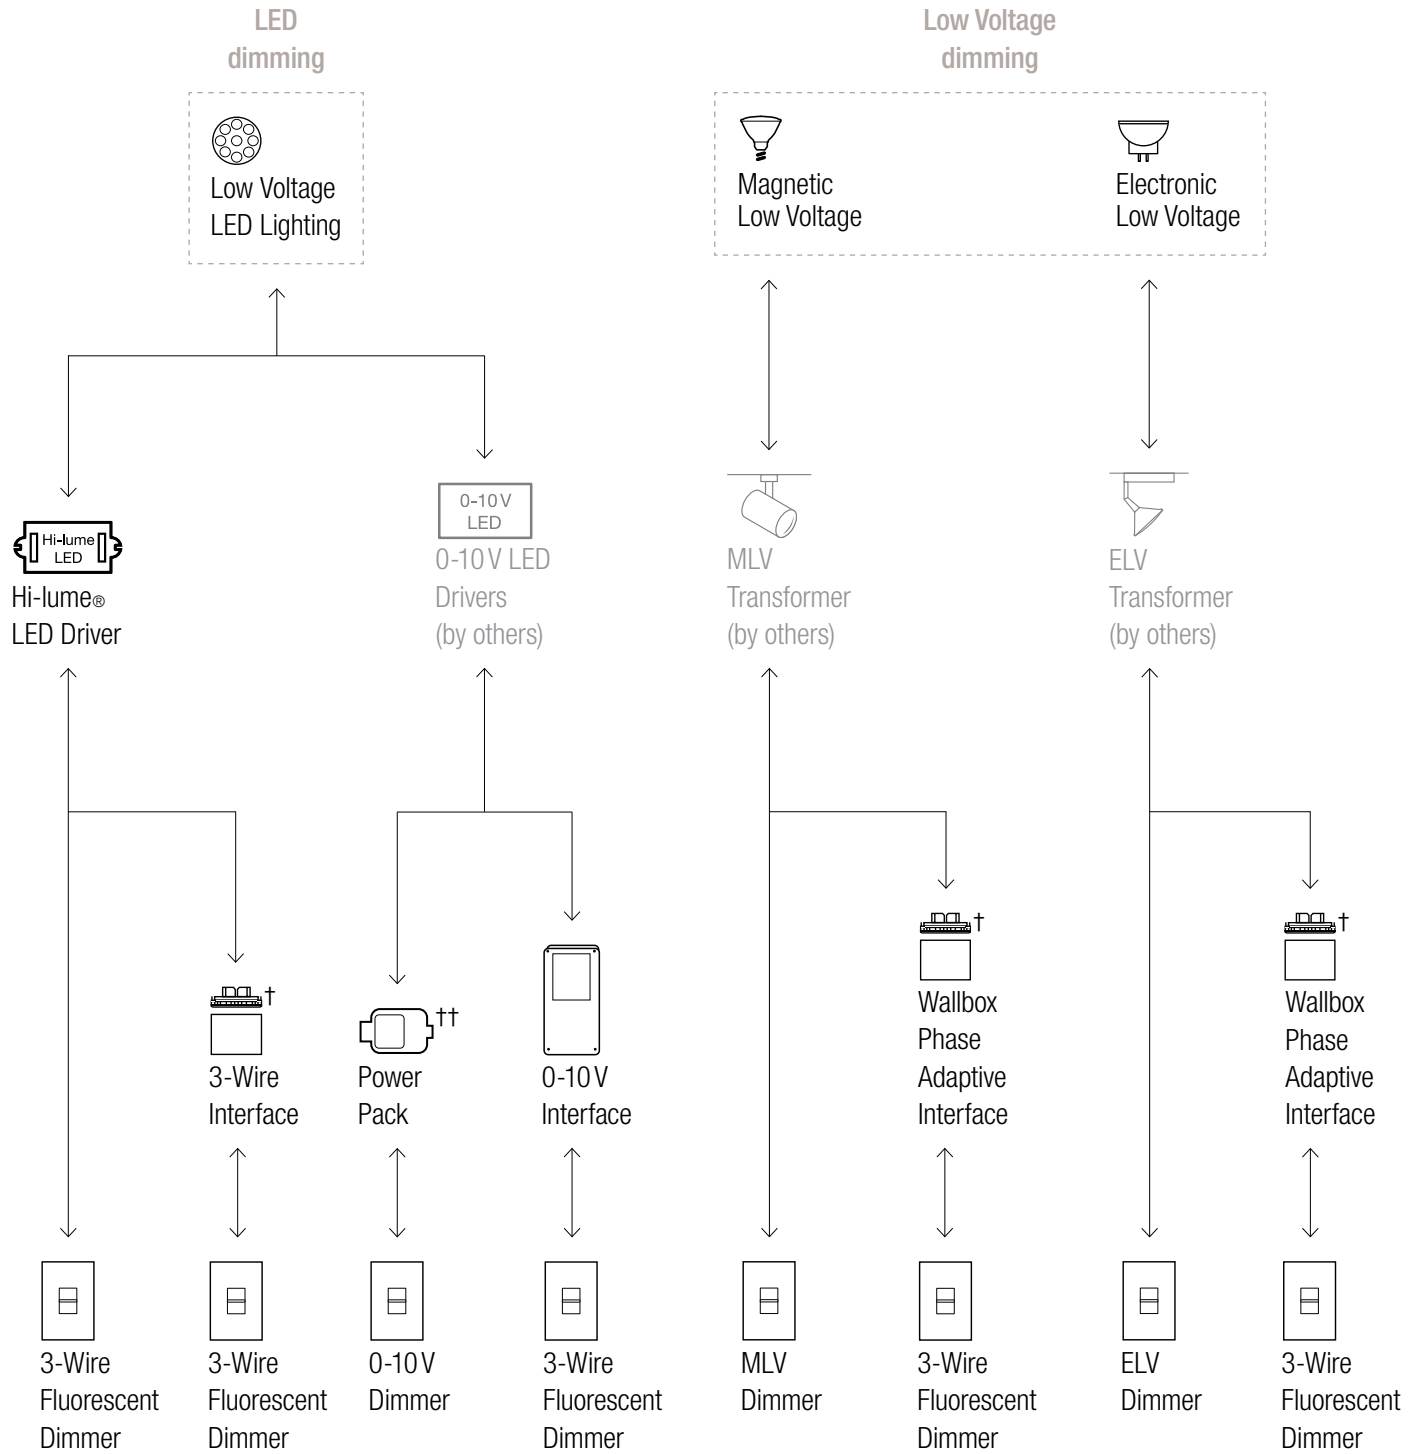


For illustration purposes only. Consult model number pages for specific voltage and capacity information.

For more information on LED drivers, visit www.lutron.com/LED.

[†]Interface provides additional capacity and/or may be different voltage than dimmer.

^{††}PowerPack provides on/off switching to 0-10V load.

Nova T[☆]

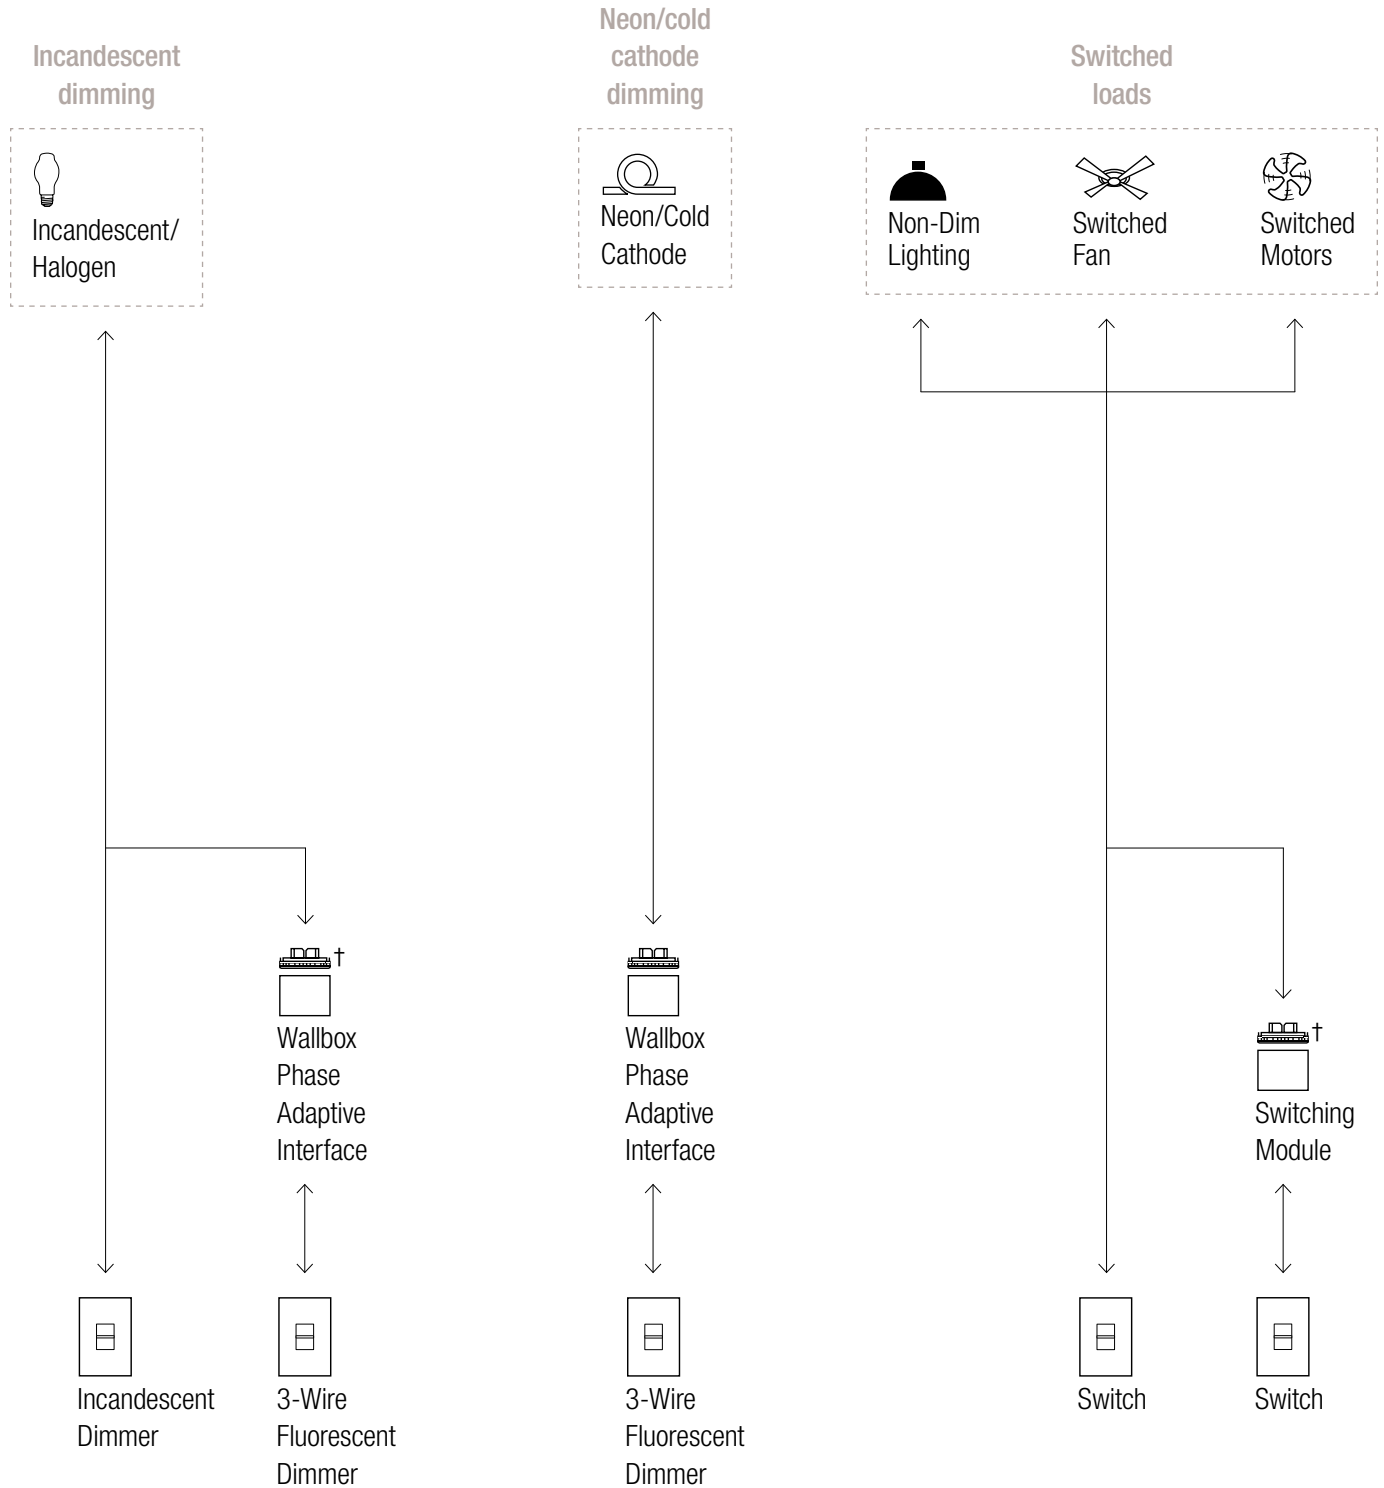

For illustration purposes only. Consult model number pages for specific voltage and capacity information.

†Interface provides additional capacity and/or may be different voltage than dimmer.

Nova T[☆]

Ceiling
fan



Fan
Control


For illustration purposes only. Consult model number pages for specific voltage and capacity information.

Table of contents


Standard architectural wallplates	B1
Customized architectural wallplates	B1
Determine which architectural wallplate is right for your application	B2
How to construct a wallplate model number	B3
Derating tables	B9
Multi-gang worksheet	B12

Standard architectural wallplates

Six popular 2-, 3- and 4-gang wallplates in nine matte colors
(48-hours shipment available)

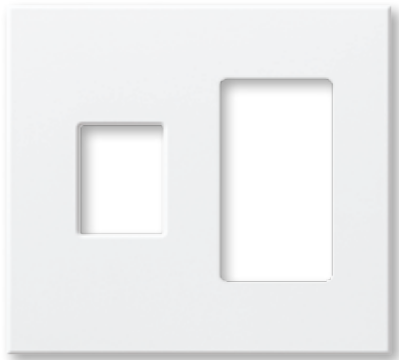

H: 4.56 in x W: 4.56 in




Fins broken wallplates (FB)

- Controls fit into standard size backboxes with standard size wallplates
- Dimmers must be derated, pg. 170

Use with:

- Vareo®
- NovaT☆®
- Architectural accessories
- GRAFIK Eye® seeTouch®, and architectural style wallstations
- HomeWorks® controls

What's included:




Adapter plate, screws, wallplate (inserts not included)

Customized architectural wallplates

Create a wallplate for any application



H: 4.56 in x W: 4.56 in




Fins broken wallplates (FB)

- Controls fit into standard size backboxes with standard size wallplates
- Dimmers must be derated
- Combines large and small controls


Use with:

- Vareo®
- NovaT☆®
- Architectural accessories
- GRAFIK Eye® seeTouch®, and architectural style wallstations
- HomeWorks® controls


What's included:



Adapter plate, screws, wallplate (inserts not included)

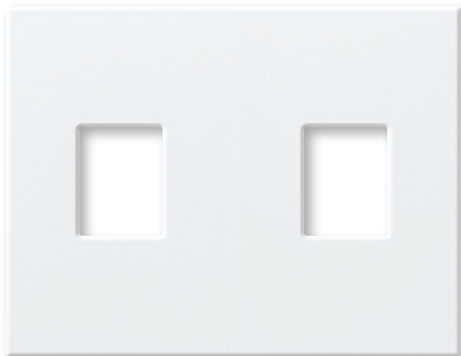

H: 4.56 in x W: 5.41 in



No fins broken wallplates (NFB)


- Controls require wider-than-standard backboxes and wallplates (see pgs. B7–B8)
- Dimmers can be used to their full capacity
- Combines large and small controls

Multi-gang, screwless, seamless wallplates available—wallplate selector tool at www.lutron.com/lutron/wallplate.

Lutron's architectural style controls can be ganged at full dimmer capacity using "No Fins Broken" wallplates. When using "Fins Broken" wallplates, maximum dimmer capacity must be derated. See pg. 170 for complete information on derating a dimmer.

Determine which architectural wallplate is right for your application


Standard architectural wallplates



Fins broken wallplates (FB)


- 48-hour shipment available
- Use to conserve horizontal wall space

Custom architectural wallplates



Fins broken wallplates (FB)

- If you need to conserve horizontal wall space
- If you need to combine large and small controls
- If you need metal wallplates or custom colors



No fins broken wallplates (NFB)

- If you need to combine large and small controls
- If you need metal wallplates or custom colors
- Require full rating of dimmers


Lutron's architectural style controls can be ganged at full dimmer capacity using "No Fins Broken" wallplates. When using "Fins Broken" wallplates, maximum dimmer capacity must be derated. See pg. 170 for complete information on derating a dimmer.

How to construct a wallplate model number

Use the following steps to order multi-gang, metal, and replacement wallplates

1 product code

NT Thin profile (D: 0.3in or 7.6 mm)

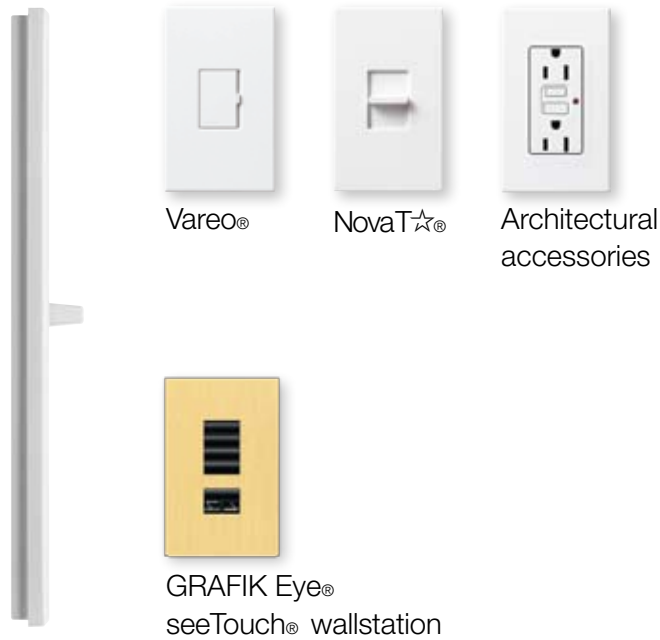

N Wide profile (D: 0.65in or 16.5 mm)



When ganging products together under a common wallplate the product's depth must be the same style (NT or N).

2 insert code(s)



The detachable face of the product is called an insert. Each product has its own Insert Code, see pgs. B5–B6 for a complete listing of model numbers and their insert codes.

Select Insert Codes and add to model numbers in left to right order as if looking at the front of the wallplate (see example at the bottom of this page).




Inserts used in a fins broken application.
From left to right:
NovaT® (small control)
Vareo® (small control)
NovaT® (large control)

NT-SOL-FB-WH

NT-SOL-FB-WH


3 ganging code

FB



Fins broken

NFB




No fins broken



Mixing small and large controls

Correct: group small and large at either end

Incorrect: do not alternate small and large



4.5 in required for vertical installations



Determine whether controls need to use maximum load capacity or can be derated. Derating is the reduction of the maximum capacity (load) a unit can reliably handle when fins/side sections are removed. A scored section along each side of the mounting plate/fin is designed to be removed to facilitate ganging.

See pg. 170 for more information about your specific product's derated capacities. Note: If **any** controls are ganged under the same wallplate with no fins broken, then the ganging code is NFB.

4 color code

Available colors

Colors (architectural matte finish) (3–5 days)*

- | | |
|------------------------|------------------|
| WH White | GR Gray |
| BE Beige | TP Taupe |
| IV Ivory | BR Brown |
| AL Almond | BL Black |
| LA Light Almond | SI Sienna |

Metals (special finishes) (4–6 weeks)†

- | | |
|--------------------------|-------------------------|
| SB Satin Brass | SC Satin Chrome |
| BB Bright Brass | SN Satin Nickel |
| BC Bright Chrome | BN Bright Nickel |
| QB Antique Brass | AU Gold Plated |
| QZ Antique Bronze | |

Anodized aluminum

- | | |
|------------------|------------------|
| CLA Clear | BRA Brass |
| BLA Black | |

Custom colors and finishes are available by providing Lutron® with a paint color number, swatch, or sample. Lutron can color match your controls. Contact Customer Service at 1.888.LUTRON1.

Multi-gang, screwless, seamless wallplates available—wallplate selector tool at www.lutron.com/lutron/wallplate.

CAD file downloads available at www.lutron.com/technical_info/cad.

*Most matte wallplates ship in 3-5 days; wider wallplates require additional time.
†Consult Lutron® Customer Service for pricing and delivery at 1.888.LUTRON1.

NT-SOL-FB-WH

NT-SOL-FB-WH

Model Number	Insert Code	Control Size
Vareo®		
V-600-	O	small
V-1000-	O	small
VETN-1000-	K	small
VETS-1000-	K	small
VETS-1000-SL-	H	small
VETS-A-SL-	H	small
VETS-R-	K	small
VF-10-	O	small
Nova T[☆]®		
NT-1PS-	S	small
NT-3PS-	S	small
NT-4PS-	S	small
NT-600-	S	small
NT-603P-	P	small
NT-1000-	S	small
NT-1003P-	P	small
NT-1500-	L	large
NT-1503P-	U	large
NT-2000-*	TF	large
NT-DPDT-CO-MA-	S	small
NT-DPDT-CO-MO-	S	small
NTA-2-	S	small
NTB-600-	S	small
NTB-1000-	S	small
NTELV-300-	S	small
NTELV-600-	S	small
NTF-10-	S	small
NTF-103P-	P	small
NTFS-6E-	S	small
NTFS-12E-	L	large
NTFSQ-	S	small
NTFTU-5A-	S	small
NTFTV	S	small
NTLV-600-	S	small
NTLV-603P-	P	small
NTLV-1000-	S	small
NTLV-1003P-	P	small
NTLV-1500-	L	large
NTLV-1503P-	U	large

Model Number	Insert Code	Control Size
Accessories		
NT-6PF-	R3¹	small
NT-CJ-	9	small
NT-PJ-	8	small
NT-PJ8CJ-	TE	small
NT-PJ8X2-	TC	small
NT-PJ8X3-	TD	small
NTR-15-	R	small
NTR-15-GFCI-	R3¹	small
NTR-15-IG-OR-	R¹	small
NTR-20-	4	small
NTR-20-GFCI-	R3¹	small
NTR-20-IG-OR-	R¹	small
GRAFIK Eye® Wallstations		
NTGRX-1S-	K	small
NTGRX-2B-SL-	T8	small
NTGRX-4B-	T5	small
NTGRX-4M-	T1	small
NTGRX-4S-	A	small
NTGRX-4S-IR-	A	small
NTGRX-SI4S-IR-	A	small
SG-2BI-	R3	small
SG-4BI-	R3	small
SG-4MI-	R3	small
SG-4NRLI-	R3	small
SG-4SI-	R3	small
SG-4SIRI-	R3	small

Blank Inserts and Yokes

For each blank ordered, order one yoke to attach wallplate to backbox.

small blank insert **E*** small
 large blank insert **G**** large



*small yoke

**large yoke

NT-YS

NT-YL

*NT-2000- must use NFB Series only.
¹Product insert is permanently attached. Order the device in the color desired, wallplate will not have an insert to change the device color in the field.


Model Number	Insert Code	Control Size
Nova®		
N-1PS-	S	small
N-1PS-374- -CSA-	S	small
N-3PS-	S	small
N-3PS-374- -CSA-	S	small
N-4PS-	S	small
N-600-	S	small
N-603P-	P	small
N-1000-	S	small
N-1003P-	P	small
N-1500-	L	large
N-1503P-	U	large
N-2000-	L	large
N-2003P-	U	large
NELV-450-	S	small
NF-10-	S	small
NF-10-277-	L	large
NF-103P-	P	small
NF-103P-277-	P	small
NF-20-	L	large
NF-20-277-	L	large
NF-30-	L	large
NFS-6E-	S	small
NFS-12E-	L	large
NFTV-	S	small
NLV-600-	S	small
NLV-603P-	P	small
NLV-1000-	L	large
NLV-1003P-	P	small
NLV-1500-	L	large
NLV-1503P-	U	large
NLV-2003P-	U	large

Blank Inserts and Yokes

For each blank ordered, order one yoke to attach wallplate to backbox.

small blank insert **E*** small

large blank insert **G**** large



*small yoke

**large yoke

N-YS

N-YL

Available colors Nova T[☆]®/Vareo® ONLY

Colors (architectural matte finish) (3-5 days)*

WH White	GR Gray
BE Beige	TP Taupe
IV Ivory	BR Brown
AL Almond	BL Black
LA Light Almond	SI Sienna

Metals (special finishes) (4-6 weeks)†

SB Satin Brass	SC Satin Chrome
BB Bright Brass	SN Satin Nickel
BC Bright Chrome	BN Bright Nickel
QB Antique Brass	AU Gold Plated
QZ Antique Bronze	

Anodized aluminum

CLA Clear	BRA Brass
BLA Black	


Available colors Nova® ONLY

Colors (architectural matte finish) (3-5 days)*

WH White	LA Light Almond
BE Beige	GR Gray
IV Ivory	BR Brown
AL Almond	BL Black

*Most matte wallplates ship in 3–5 days; wider wallplates require additional time.



†Consult Lutron® Customer Service for pricing and delivery at 1.888.LUTRON1.




- No fins broken wallplates (NFB)** (no derating required—full rated capacity)
- For Vareo® and Nova T☆® installations

For use with installations that **DO NOT** include an NT-2000-

		Number of Small Controls					
		0	1	2	3	4	5
Number of Large Controls	0	NA	1 2.75 in	1+1 5.41 in	4 8.14 in	4+1 10.86 in	7 13.50 in
	1	1 4.56 in	3 7.22 in	5 10.01 in	6 12.68 in		
	2	4 9.09 in	6 11.82 in	7 14.49 in			
	3	6 13.63 in			For larger wallplate configurations, contact Lutron® Customer Service.		

 → number of backboxes
 → wallplate width





- No fins broken wallplates (NFB)** (no derating required—full rated capacity)
- For Vareo® and Nova T☆® installations
 - NT-2000- can be used




NT-2000-

		Number of Small Controls			
		0	1	2	3
Number of Large Controls	1	2 4.56 in	2+1 7.22 in	2+1+1 10.01 in	2+4 12.68 in
	2	2+2 9.09 in	2+2+1 11.82 in	2+2+1+1 14.49 in	
	3	2+2+2 13.63 in	For larger wallplate configurations, contact Lutron® Customer Service.		


 → number of backboxes
 → wallplate width


Note: When ganging an even number of small controls, use backboxes with tapped ears. Do not use plaster rings or gangbox covers.



- Fins broken wallplates (FB)** (derating required)
 • for Vareo® and Nova T☆® installations

		Number of Small Controls						
		0	1	2	3	4	5	6
Number of Large Controls	0	NA	1	2 4.56 in	3 6.32 in	4 8.45 in	5 9.97 in	6 11.85 in
	1	1 4.56 in	3 6.32 in	4 8.14 in	5 9.97 in	6 11.85 in	7 15.5 in	
	2	3 8.20 in	5 9.97 in	6 11.79 in	7 15.5 in			
	3	5 11.85 in	7 15.5 in			For larger wallplate configurations, contact Lutron® Customer Service.		







 → number of backboxes
 → wallplate width

Example: plus sign (1 + 1) two small controls

The plus sign (1 + 1) indicates the need for additional backboxes connected by a chase nipple or spacer with 3/4 in separation as shown.




Two single-gang backboxes connected by a chase nipple with 3/4 in separation.



→ 3/4 in ←


Use a spacer, chase nipple or Lutron® part# PLUS-ADAPTER® -3.5.



Two small controls mounted on a no fins broken adapter plate (provided with wallplate).



See pgs. B5–B6 for small and large control numbers.



No Fins Broken (NFB) screwless seamless wallplate with no visible hardware NT-SS-NFB-WH.

Derating Table 1

New Architectural | Verti®

Designer | Maestro®, Maestro IR®, Maestro Wireless®, Spacer System®, Diva®, Lyneo® Lx, Skylark Contour™, Skylark®

Traditional | Abella®, Ceano®, Ariadni®, Glyder®, Rotary



No fins broken



1 fin broken



2 fins broken

Incandescent			
Dimmers	600W	500W	400W
	1000W	800W	650W
Dual dimmers	300W	250W	200W
	300W	250W	200W
Magnetic low-voltage			
Dimmers	600VA/450W	500VA/400W	400VA/300W
	1000VA/800W	800VA/650W	650VA/500W
Electronic low-voltage			
Dimmers	300W	250W	200W
	500W	450W	400W
	600W	500W	400W
Fluorescent			
Hi-lume®/Hi-lume® Compact SE/Eco-10®/EcoSystem®			
Verti	60 ballasts/6A	50 ballasts/5A	35 ballasts/3.5A
Maestro/Spacer System	20 ballasts/6A	20 ballasts/5A	20 ballasts/3.5A
Diva, Skylark, Lyneo Lx and Ariadni	no derating	no derating	no derating
Tu-Wire®: Spacer System, Diva, Skylark	5A	4A	3.3A
Fan controls			
Quiet 7-speed	1.0A/300W	1.0A/300W	1.0A/300W
Quiet 3-speed	1.5A	1.5A	1.5A
Fully variable	5A	4A	3A
Fan/light controls			
Quiet 7-speed	1.0A/300W	1.0A/300W	1.0A/300W
Quiet 3-speed	1.5A/300W	1.5A/300W	1.5A/300W
	1.5A/360W	1.5A/360W	1.5A/360W
Fully variable	2.5A/300W	2.1A/250W	1.7A/200W
Electronic switches			
Verti	6A/3A	5A/3A	3.5A/3A
Maestro (light/fan)	8A/3A	6.5A/3A	5A/3A
Abella (light/fan)	6A/3A	5A/3A	3.5A/3A

Derating Table 2

Architectural | Vareo®, Nova T☆®



No fins broken



1 fin broken



2 fins broken

	No fins broken	1 fin broken	2 fins broken
Incandescent			
Dimmers	600W	500W	300W
	1000W	900W	700W
	1500W	1250W	1000W
	1950W	–	–
Magnetic low-voltage			
Dimmers	600 VA/450 W	500 VA/400 W	300 VA/250 W
	1000 VA/800 W	900 VA/750 W	700 VA/500 W
	1500 VA/1200 W	1250 VA/1000 W	1000 VA/800 W
Electronic low-voltage			
Dimmers	300W	300W	250W
	600W	500W	400W
Fluorescent			
Hi-lume®/Hi-lume® Compact SE/Eco-10®/EcoSystem®			
Vareo	20 ballasts /8 A	20 ballasts /6 A	20 ballasts /4.5 A
Nova T☆	6 A	no derating	no derating
	8 A	no derating	no derating
	16 A	no derating	no derating
0-10VDC control ¹	30mA ballasts	no derating	no derating
Tu-Wire®	5 A	4 A	3.3 A
Fan controls			
Quiet 3-speed	1.5 A	no derating	no derating
Fully variable	6 A	4.2 A	2.5 A
Fully variable	12 A	10 A	8.3 A
Electronic tapswitches²			
VETS-1000-	1000W	800W	650W
VETS-1000-SL-	1000W	900W	700W
VETN-1000-	1000 VA	700 VA	550 VA

For further information on ganging Nova®, visit www.lutron.com/customganging.

¹PowerPack required for line voltage switching.

²VETS-R-Auxiliary electronic tapswitches do not require derating.

Derating Table 3

Architectural | Nova®



No fins broken



1 fin broken



2 fins broken

	No fins broken	1 fin broken	2 fins broken
Incandescent¹			
Dimmers	600W	600W	600W
	1000W	900W	700W
	1500W	1250W	1000W
	2000W	1800W	1500W
Magnetic low-voltage¹			
Dimmers	600 VA/450 W	600 VA/450 W	500 VA/400 W
	1000 VA/800 W	900 VA/750 W	700 VA/500 W
	1500 VA/1200 W	1250 VA/1000 W	1000 VA/800 W
	2000 VA/1600 W	1800 VA/1500 W	1500 VA/1200 W
Electronic low-voltage			
Dimmers	450W	400W	350W
Fluorescent			
Hi-lume®/Hi-lume® Compact SE/Eco-10®/EcoSystem®			
Nova	16A	no derating	no derating
	8A	no derating	no derating
	6A	no derating	no derating
0-10VDC control	60 ballasts/16A	no derating	no derating
Tu-Wire®	5A	4A	3.3A
Fan controls			
Fully variable	6A	5.5A	5A
	12A	11A	10A

Controls must have side sections removed to gang if using VWP wallplates.

¹Recommended 40W minimum load.

COPY FOR EACH USE

Multi-gang Worksheet (1-6 Gang Installation)

Wallplate Thickness: Thin Profile Vareo®/NovaT[☆]® **or** Heavy Duty Nova®

Wallplate Width: FB (Fins Broken) **or** NFB (No Fins Broken)

- For use with Vareo®, NovaT[☆]® and Nova®
- Outline wallplate gang size below with a marker (cross out the rest)

	Position 1	Position 2	Position 3	Position 4	Position 5	Position 6
Load Type						
Load Size W/A/A						
Number of Fins Removed						
Control Model Number						
Full Rating (No Fins Broken)						
Derated Capacity (Fins Broken)						
Small or Large Control						
Wallplate Insert Code						
Interface (if needed)						

Wallplate Model #: _____

Wallplate Color: _____

Customization: Engraving Custom Color Silk Screen

Backbox Configurations: _____

Vertical Installations

4.5" Required

Mixing Small and Large Controls

Group large controls together on one end of the wallplate. Do not alternate large and small controls.

Correct

Incorrect

No Fins Broken

Fins Broken

LUTRON Coopersburg, PA 18036 Phone: 1.888.LUTRON1	Project Name: _____ Room: _____ Control Address #: _____ P.O. #: _____	Page: _____ Quantity: _____ Lutron Order #: _____ Lutron Job #: _____
--	---	--

For additional information use the Wallplate Selector tool located on the Lutron® website at www.lutron.com/lutron/wallplate.