






Shown actual size: Nova T<sup>☆</sup>  
dimmer in Black (BL) with 1-gang  
Architectural wallplate in Clear  
Anodized Aluminum (CLA).

### Product family features

- Full family of controls plus matching fan controls, switches and wiring devices
- Exclusive dimmer/switch size opening
- Slide adjusts light to suit any activity
- Classic slider, thin profile design
- Voltage compensation maintains stable light levels, despite line voltage variations
- Mechanical air-gap to disconnect load power
- 100% factory tested
- Coordinating wallplate included with Architectural matte finish controls, metal wallplates only available separately
- Custom engraving and custom coloring available for wallplates, see pg. 155


### Control types

-  Single-pole (one location)
-  3-way or 4-way (two or more locations)
-  Two-location dimming only (Omnislide™)

### Direct load type compatibility

-  Incandescent/halogen lighting
-  Magnetic low-voltage lighting
-  Electronic low-voltage lighting
-  Fluorescent lighting
-  LED lighting
-  Ceiling fans
-  Motorized window treatments (AC)

### Load types requiring load interface

-  Neon/cold cathode lighting

Lighting load interfaces may be applicable for some additional load type, voltage and capacity combinations.

For additional information, see pg. 174.

**Available finishes**

Use **BOLD** color code in model number (Example: NT-600-**SI**)

Architectural matte finishes\*



**WH**  
White



**LA**  
Light Almond



**AL**  
Almond



**BE**  
Beige



**IV**  
Ivory



**TP**  
Taupe



**GR**  
Gray



**SI**  
Sienna



**BR**  
Brown



**BL**  
Black

Architectural metal finish wallplates\*\*



**BN**  
Bright Nickel



**BC**  
Bright Chrome



**CLA**  
Clear Anodized  
Aluminum



**SC**  
Satin Chrome



**SN**  
Satin Nickel



**QZ**  
Antique Bronze



**AU**  
Gold Plated



**BB**  
Bright Brass



**BRA**  
Brass Anodized  
Aluminum



**SB**  
Satin Brass



**QB**  
Antique Brass



**BLA**  
Black Anodized  
Aluminum

\*Coordinating wallplate included with Architectural matte controls.

\*\*Metal finish wallplates only available separately and include black plastic trim/adaptor, visible from side. Match with separate Black (BL) controls. For wallplate information, see pg. 152.

## Dimmers

### Slide-to-off dimmers/single-pole



- Slide up to brighten; down to dim
- Standard size dimmer shown
- Higher capacity loads require large controls, see below

## Switches and fan controls

### Linear-slide switches



- Slide up to on; down to off

### Preset dimmers/3-way



- Button turns on/off to slider level
- Slide up to brighten; down to dim
- Higher capacity loads require large controls, see below

### Slide-to-off fan controls



- Slide up to increase speed/on; down to decrease speed/off
- Quiet 3-speed available for use with one paddle fan, or fully variable available for use with multiple paddle or exhaust fans
- Quiet 3-speed model designed to prevent motor hum
- Higher capacity loads require large controls, see below

### Omnislide two-location slide-to-off dimmers



- Slide up to brighten; down to dim
- Provides true dimming from both locations




### Large Control

- Higher capacity dimmers require larger heat sink behind wallplate
- Large controls available as preset dimmer, slide-to-off dimmer or fan control
- Large control measures 4.56 in x 4.56 in
- Requires large wallplate
- Most can fit in a 1-gang electrical backbox


### Connections overview

#### Load connections\*


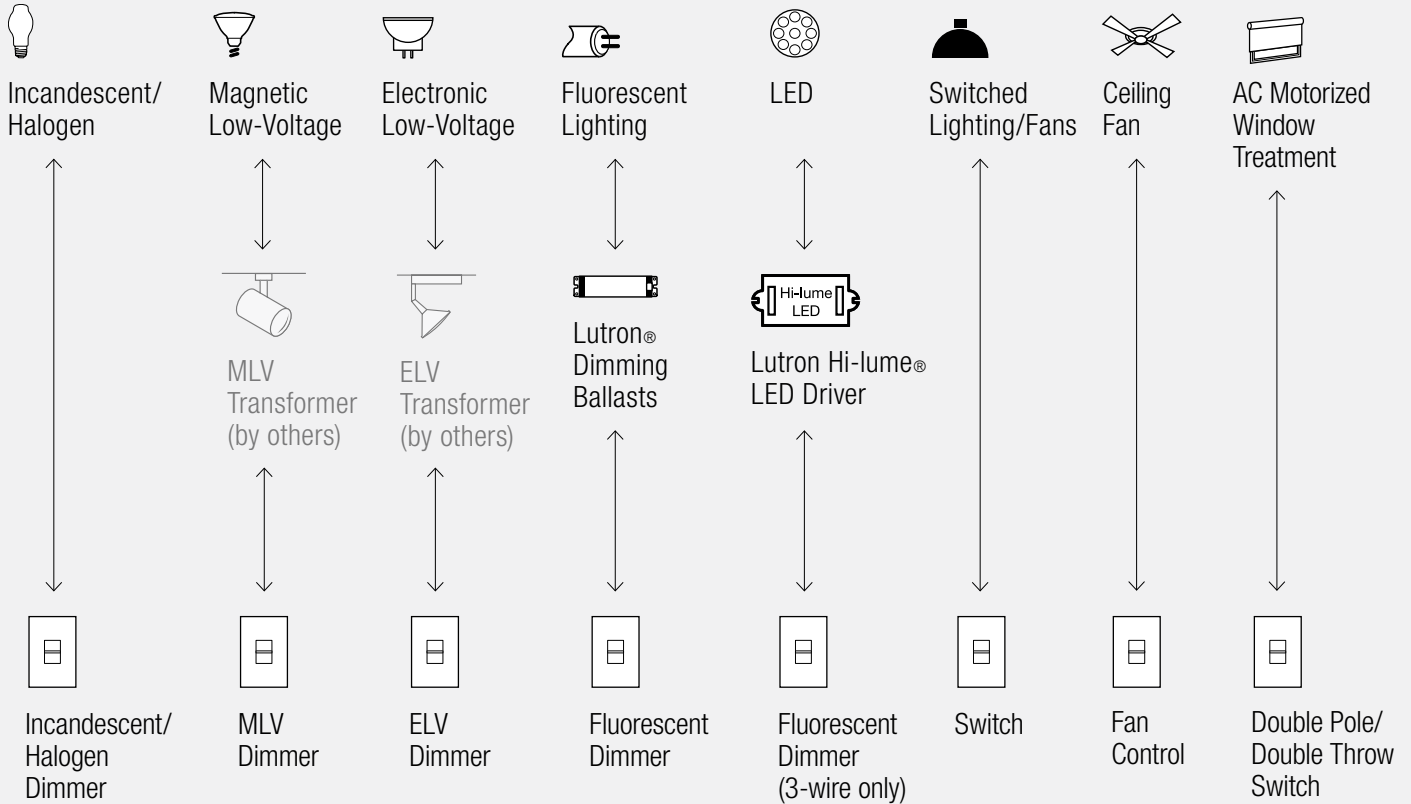


#### Control types (for 2 or more locations)

Dim from two locations (Incandescent/halogen only)

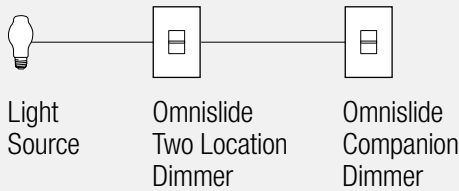

Dim from one location, switch from the others

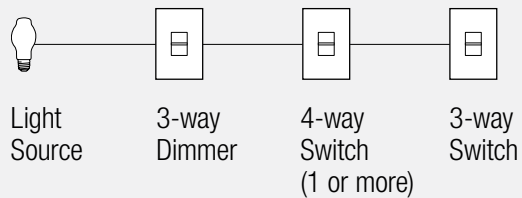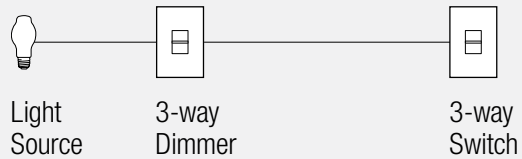

For more information on ballasts, visit [www.lutron.com/ballasts](http://www.lutron.com/ballasts).  
For more information on LED drivers, visit [www.lutron.com/LED](http://www.lutron.com/LED).

\*For illustration purposes only. Consult model number pages for specific voltage and capacity information.

## Dimmer model numbers



### Incandescent/halogen dimmers

(small and large controls)

#### Slide-to-off dimmers

Single-pole (small) 120V 600W	NT-600- <b>AA</b> <sup>2</sup>
Single-pole (small) 120V 1000W	NT-1000- <b>AA</b> <sup>2</sup>
Single-pole (large) 120V 1500W	NT-1500- <b>AA</b> <sup>2</sup>
Single-pole (large) 120V 1920W	NT-2000- <b>AA</b> <sup>2</sup>

NT-2000 dimmers must be ganged with no fins broken. See ganging and derating on pg. 170 for further information.

NT-2000 requires a 2-gang electrical backbox.

#### Omnislide two-location slide-to-off dimmers

Base unit (small) 120V 600W	NTB-600- <b>AA</b> <sup>2</sup>
Base unit (small) 120V 1000W	NTB-1000- <b>AA</b> <sup>2</sup>
Auxiliary unit (use with base unit)	NTA-2- <b>AA</b> <sup>2</sup>

For two-location incandescent/halogen dimming, use one base unit (NTB-600- or NTB-1000-) with one auxiliary unit (NTA-2-).

#### Preset dimmers

3-way/single-pole (small) 120V 600W	NT-603P- <b>AA</b> <sup>2</sup>
3-way/single-pole (small) 120V 1000W	NT-1003P- <b>AA</b> <sup>2</sup>
3-way/single-pole (large) 120V 1500W	NT-1503P- <b>AA</b> <sup>2</sup>



### Magnetic low-voltage dimmers

(small and large controls)

#### Slide-to-off dimmers

Single-pole (small) 120V 600VA (450W)	NTLV-600- <b>AA</b> <sup>2</sup>
Single-pole (small) 120V 1000VA (800W)	NTLV-1000- <b>AA</b> <sup>2</sup>
Single-pole (small)* 277V 600VA (450W)	NTLV-600-277- <b>AA</b> <sup>2</sup>
Single-pole (small)* 277V 1000VA (800W)	NTLV-1000-277- <b>AA</b> <sup>2</sup>
Single-pole (large) 1500VA (1200W)	NTLV-1500- <b>AA</b> <sup>2</sup>

#### Preset dimmers

3-way/single-pole (small) 120V 600VA (450W)	NTLV-603P- <b>AA</b> <sup>2</sup>
3-way/single-pole (small) 120V 1000VA (800W)	NTLV-1003P- <b>AA</b> <sup>2</sup>
3-way/single-pole (large) 120V 1500VA (1200W)	NTLV-1503P- <b>AA</b> <sup>2</sup>

The stated VA (Volt-Ampere) rating includes the magnetic transformer heat losses and the lamp load. The stated W (Watt) rating is the maximum lamp wattage based on assumed 20% transformer loss.

**AA**<sup>2</sup>: Architectural matte color codes, see pg. 27  
(1-gang wallplate included)

All models must be derated in standard ganging unless otherwise noted, see pg. 170.

**\*Requires neutral wire connection.**

## Dimmer model numbers

### **Electronic low-voltage dimmers\*** (small controls)

#### Slide-to-off dimmers

Single-pole 120V 300W	NTELV-300- <b>AA</b> <sup>2</sup>
Single-pole 120V 600W	NTELV-600- <b>AA</b> <sup>2</sup>

Only certain LED drivers are dimmable using an ELV dimmer, for more information visit [www.lutron.com/LED](http://www.lutron.com/LED).

### **3-wire fluorescent dimmers\*** (small control)

#### Slide-to-off dimmers

Single-pole 120V 16A	NTF-10- <b>AA</b> <sup>2</sup>
Single-pole 277V 8A	NTF-10-277- <b>AA</b> <sup>2</sup>

#### Preset dimmers

3-way 120V 8A	NTF-103P- <b>AA</b> <sup>2</sup>
3-way 277V 6A	NTF-103P-277- <b>AA</b> <sup>2</sup>

For use with Hi-lume<sup>®</sup>, Hi-lume<sup>®</sup> Compact SE, Hi-lume<sup>®</sup> 3D, Eco-10<sup>®</sup>, EcoSystem<sup>®</sup> ballasts.

Also compatible with Hi-lume<sup>®</sup> LED driver.

No derating required if ganged.

Adjustable low-end trim.

### **0-10V dimmer** (current sink control) (small controls)

#### Slide-to-off dimmer

Single-pole 30mA max control current	NTFTV- <b>AA</b> <sup>2</sup>
---	-------------------------------

Control provides dimming signal only. For dimming with on/off switching, **use with Lutron PowerPack**: PP-120H, PP-277H or PP-347H. Consult ballast manufacturer for specific ballast current draw to determine maximum number of ballasts per control.

For information on using Lutron dimmers to control: Advance Mark VII dimming ballasts, visit [www.lutron.com/advance](http://www.lutron.com/advance); Universal dimming ballasts, visit [www.lutron.com/universal](http://www.lutron.com/universal).

No derating required if ganged.

### **Tu-Wire<sup>®</sup> fluorescent dimmers** (small controls)

#### Slide-to-off dimmers

Single-pole 120V 5A	NTFTU-5A- <b>AA</b> <sup>2</sup>
Single-pole* 277V 5A	NTFTU-5A-277- <b>AA</b> <sup>2</sup>

Also compatible with Advance Mark X ballasts, for further information visit [www.lutron.com/advance](http://www.lutron.com/advance).

For information on use with Universal and OSRAM ballasts, contact Technical Support at 1.800.523.9466.

**AA**<sup>2</sup>: Architectural matte color codes, see pg. 27  
(1-gang wallplate included)

For more information on Lutron ballasts, visit [www.lutron.com/ballasts](http://www.lutron.com/ballasts).

All models must be derated if ganged unless otherwise noted, see pg. 170.

\*Requires neutral wire connection.

### Dimmer model numbers

 **Hi-lume® LED drivers:**  
**3-wire fluorescent dimmers\***  
(small controls)

**Slide-to-off dimmers**

Single-pole 120V 16A	NTF-10- <b>AA</b> <sup>2</sup>
Single-pole 277V 8A	NTF-10-277- <b>AA</b> <sup>2</sup>

**Preset dimmers**

3-way/single-pole 120V 8A	NTF-103P- <b>AA</b> <sup>2</sup>
3-way/single-pole 277V 6A	NTF-103P-277- <b>AA</b> <sup>2</sup>


Exclusively compatible with Hi-lume LED driver.

For more information on Hi-lume LED drivers, visit [www.lutron.com/HilumeLED](http://www.lutron.com/HilumeLED).

To control lights from multiple-locations, use 3-way dimmer with NT-3PS- and NT-4PS- or other mechanical switches.

No derating required if ganged.

Adjustable low-end trim.

 **0-10V LED drivers:**  
**0-10V dimmers** (current sink control)  
(small controls)

**Slide-to-off dimmer**

Single-pole 30mA max control current	NTFTV- <b>AA</b> <sup>2</sup>
---	-------------------------------

Control provides dimming signal only. For dimming with on/off switching, **use with Lutron PowerPack:** PP-120H, PP-277H or PP-347H.

Consult ballast manufacturer for specific ballast current draw to determine maximum number of ballasts per control.

For compatible 0-10V LED drivers by others, visit [www.lutron.com/LED](http://www.lutron.com/LED).

No derating required if ganged.

**AA**<sup>2</sup>: Architectural matte color codes, see pg. 27 (1-gang wallplate included)

### Fan control and switch model numbers

 **Fan controls**  
(small and large controls)

**Slide-to-off fan control—quiet 3-speed**

Single-pole fan control (small) 120V 1.5A	NTFSQ- <b>AA</b> <sup>2</sup>
--	-------------------------------

For use with only one ceiling fan.  
No derating required if ganged.

**Slide-to-off fan controls—fully variable**

Single-pole fan control (small) 120V 6A	NTFS-6E- <b>AA</b> <sup>2</sup>
Single-pole fan control (large) 120V 12A	NTFS-12E- <b>AA</b> <sup>2</sup>

 **Switches**  
(small controls)

**General purpose switches—all load types**

Single-pole 120/277V 20A	NT-1PS- <b>AA</b> <sup>2</sup>
3-way 120/277V 20A	NT-3PS- <b>AA</b> <sup>2</sup>
4-way 120/277V 20A	NT-4PS- <b>AA</b> <sup>2</sup>

Momentary contact 120/277V 30A; 2HP @ 120/240VAC	NT-DPDT-CO-MO- <b>AA</b> <sup>2</sup>
--	---------------------------------------

Maintained contact 120/277V 15A; 1/2HP @ 120VAC; 2HP @ 240VAC	NT-DPDT-CO-MA- <b>AA</b> <sup>2</sup>
--	---------------------------------------

For 3-way and 4-way switching, use NT-3PS-, NT-4PS- or other mechanical switches.


No derating required if ganged.

All models must be derated in standard ganging unless otherwise noted, see pg. 170.

**\*Requires neutral wire connection.**


## Accessories

### Wallplates

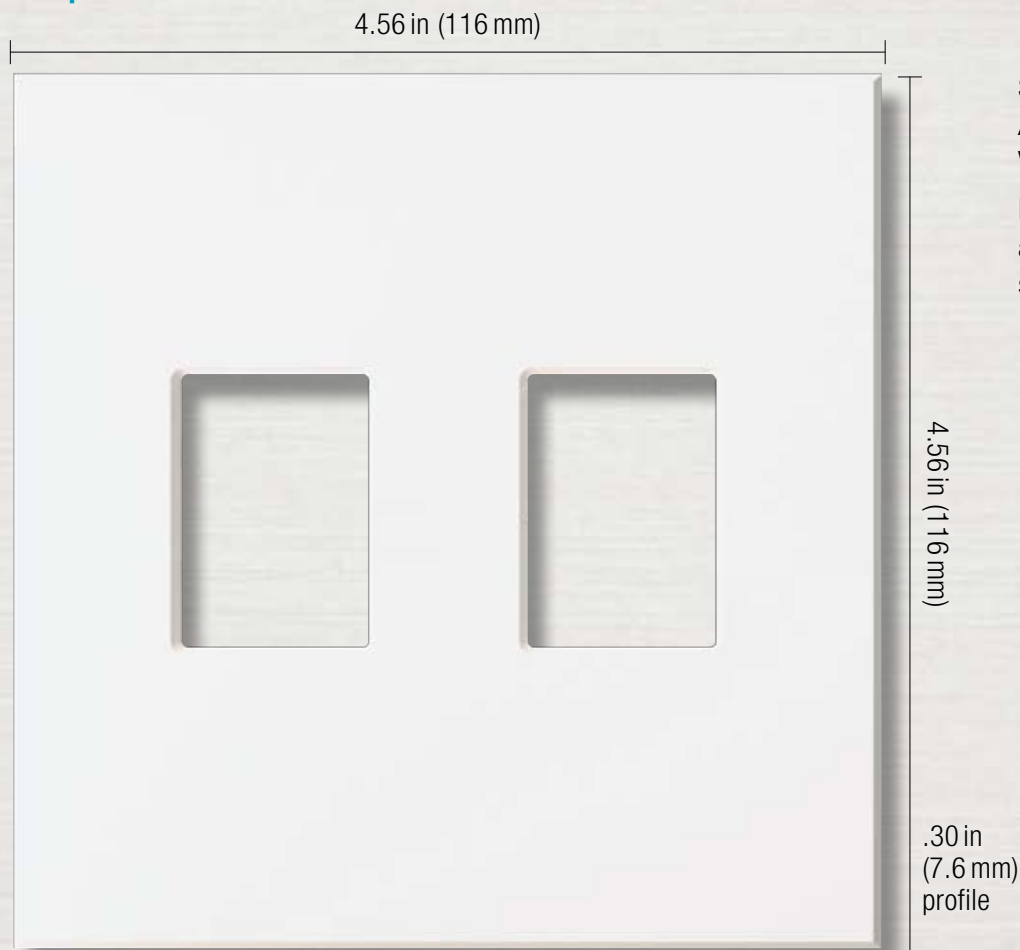

Shown actual size: 2-gang Architectural wallplate in White (WH).  
For more information about Architectural wallplates, see pg. 152.

### Coordinated electrical devices

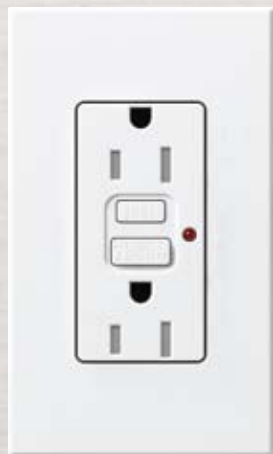

Tamper resistant  
GFCI receptacle



Customizable  
6-port frame



Cable jack

For more information about coordinated Architectural electrical devices, see pg. 156.





Shown actual size:  
Nova T☆ dimmers and  
2-gang Architectural  
wallplate in White (WH).

## Product family features

- Can be used in conjunction with the following dimmer(s) and switch(es): Vareo®, Nova T☆®
- All Lutron® wallplates are screwless, seamless and have no visible hardware, the front plate securely snaps into the alignment adapter plate
- Customize your architectural wallplate with engraving or by adding a corporate logo, contact customer service to get started at 1.888.LUTRON1
- Matte finish wallplates can be custom colored to perfectly match a paint color number, swatch or sample

## Ganging and derating

- Architectural wallplates in this section use standard ganging
- Requires fins to be removed from dimmers for proper spacing ("Fins Broken" ganging), see pg. 170
- May require derating (i.e., reduction of dimmer capacity due to fin removal), see Derating Tables, pg. 173
- Custom multi-gang wallplates required for the following cases
  - Full-capacity ganging ("No Fins Broken")
  - Large Nova T☆ controls (1500/2000 W)
  - Nova controls


For further information visit

[www.lutron.com/customganging](http://www.lutron.com/customganging).

## Available finishes

Use **BOLD** color code in model number (Example: VWP-1-**SI**)

Architectural matte finishes



**WH**  
White



**LA**  
Light Almond



**AL**  
Almond



**BE**  
Beige



**IV**  
Ivory



**TP**  
Taupe



**GR**  
Gray



**SI**  
Sienna



**BR**  
Brown



**BL**  
Black

Architectural metal finishes\*



**BN**  
Bright Nickel



**BC**  
Bright Chrome



**CLA**  
Clear Anodized  
Aluminum



**SC**  
Satin Chrome



**SN**  
Satin Nickel



**QZ**  
Antique Bronze



**AU**  
Gold Plated



**BB**  
Bright Brass



**BRA**  
Brass Anodized  
Aluminum



**SB**  
Satin Brass



**QB**  
Antique Brass




**BLA**  
Black Anodized  
Aluminum

\*Metal finish wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls.

## Wallplates for Vareo® and Nova T<sup>☆</sup>® dimmers and architectural accessories



1-gang for one switch or dimmer\* **VWP-1-AA<sup>1</sup>**  
 W: 2.75 in (70 mm); H: 4.56 in (116 mm);  
 D: .30 in (7.6 mm)



2-gang\* **VWP-2R-AA<sup>2</sup>**  
 for two accessories  
 W: 4.56 in (116 mm); H: 4.56 in (116 mm);  
 D: .30 in (7.6 mm)



1-gang for one accessory\* **VWP-R-AA<sup>1</sup>**  
 W: 2.75 in (70 mm); H: 4.56 in (116 mm);  
 D: .30 in (7.6 mm)



3-gang\* **VWP-3-AA<sup>2</sup>**  
 for three switches or dimmers  
 W: 6.32 in (161 mm); H: 4.56 in (116 mm);  
 D: .30 in (7.6 mm)



2-gang\* **VWP-2-AA<sup>2</sup>**  
 for two dimmers or switches  
 W: 4.56 in (116 mm); H: 4.56 in (116 mm);  
 D: .30 in (7.6 mm)




4-gang\* **VWP-4-AA<sup>2</sup>**  
 for four switches or dimmers  
 W: 8.45 in (215 mm); H: 4.56 in (116 mm);  
 D: .30 in (7.6 mm)

**AA<sup>1</sup>**: Architectural matte and Architectural metal color codes, see pg. 153

**AA<sup>2</sup>**: Architectural matte color codes, see pg. 153  
 For metal finishes, contact Customer Service at 1.800.LUTRON1.

Multi-gang dimmer installations may require derating, see pg. 170.

\*Metal finish wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) controls.

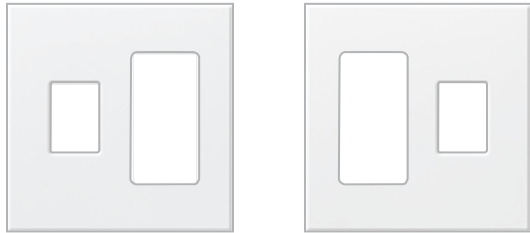

2-gang\* VWP-2CR-**AA**<sup>2</sup>  
 for one dimmer or switch and one accessory  
 W: 4.56 in (116 mm); H: 4.56 in (116 mm);  
 D: .30 in (7.6 mm)

2-gang\* VWP-2RC-**AA**<sup>2</sup>  
 for one accessory and one dimmer or switch  
 W: 4.56 in (116 mm); H: 4.56 in (116 mm);  
 D: .30 in (7.6 mm)

Multiple devices with line and low-voltage can be mounted behind a common wallplate using a standard barrier backbox, see Application Note #213 (Combining Low-Voltage and Line Voltage Wiring Devices in a Multi-Gang Box) at [www.lutron.com/applicationnotes](http://www.lutron.com/applicationnotes).

**AA**<sup>2</sup>: Architectural matte color codes, see pg. 153  
 For metal finishes, contact Customer Service at 1.800.LUTRON1.

Multi-gang dimmer installations may require derating, see pg. 170.

\*Metal finish wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) controls.


## Custom Architectural wallplates

Custom configurations, colors, engraving and silkscreenings available. Contact customer service 1.888.LUTRON1.

Custom multi-gang wallplates required for the following cases:

- Multi-gang metal finishes
- Full-capacity ganging ("No Fins Broken")
- Large Nova T☆ controls (1500/2000 W)
- Nova controls

For further information, visit [www.lutron.com/customganging](http://www.lutron.com/customganging).

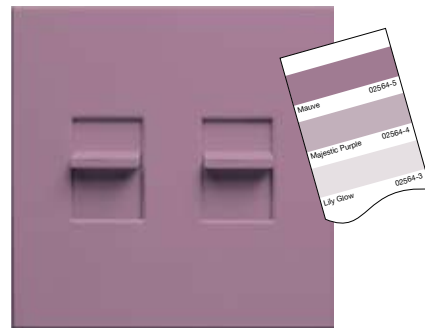

Custom coloring available for all Architectural matte finish wallplates.



Custom engraving available for all Traditional, Designer, Architectural and New Architectural style wallplates (except Stainless Steel).

For wallplate engraving schedules, go to [www.lutron.com/engraving](http://www.lutron.com/engraving).

## Cable jack



- F-style, 75-Ohm coaxial cable
- Includes 1-gang wallplate

Single cable jack\*

NT-CJ-**AA**<sup>2</sup>

## Telephone jack



- 6-conductor jack, RJ11
- Includes 1-gang wallplate

Single telephone jack\*

NT-PJ-**AA**<sup>2</sup>

## Double and triple telephone jacks



- 8-conductor jack, RJ45 category 5 phone jack
- Includes 1-gang wallplate



Double telephone jack\*†

NT-PJ8X2-**AA**<sup>2</sup>

Triple telephone jack\*†

NT-PJ8X3-**AA**<sup>2</sup>

## Telephone/cable jack



- 8-conductor jack, RJ45 category 5 phone jack
- F-style, 75-Ohm coaxial cable jack
- Includes 1-gang wallplate

Telephone/cable jack\*†

NT-PJ8CJ-**AA**<sup>2</sup>

Multiple devices with line and low-voltage can be mounted behind a common wallplate using a standard barrier backbox, see Application Note #213 (Combining Low-Voltage and Line Voltage Wiring Devices in a Multi-Gang Box) at [www.lutron.com/applicationnotes](http://www.lutron.com/applicationnotes).

**AA**<sup>2</sup>: Architectural matte color codes, see pg. 153 (1-gang wallplate included)

\*Metal finishes are only available as separate wallplates. Match with separate Black (BL) controls and accessories.

†Ivory, White, Beige and Taupe controls will ship with White coordinating jacks; Brown, Black, Gray and Metal finish controls will ship with Black coordinating jacks.

## Receptacles



- Includes 1-gang wallplate

### Tamper resistant receptacles

15A, 125V*	NTR-15-TR- <b>AA</b> <sup>2</sup>
20A, 125V*	NTR-20-TR- <b>AA</b> <sup>2</sup>


## Isolated ground receptacles



- Receptacle is orange for easy ID and circuit delineation
- Wallplate will match color that is ordered
- Includes 1-gang wallplate

15A, 125V*	NTR-15-IG-OR- <b>AA</b> <sup>2</sup>
20A, 125V*	NTR-20-IG-OR- <b>AA</b> <sup>2</sup>

## GFCI receptacles



- Press test button to confirm LED indicator status
- Press reset button to reset GFCI after circuit interruption
- Includes 1-gang wallplate

### Tamper resistant GFCI receptacles

15A, 125V*	NTR-15-GFTR- <b>AA</b> <sup>2</sup>
20A, 125V*	NTR-20-GFTR- <b>AA</b> <sup>2</sup>

**AA**<sup>2</sup>: Architectural matte color codes, see pg. 153 (1-gang wallplate included)

\*Metal finishes are only available as separate wallplates. Match with separate Black (BL) controls and accessories.

## Receptacles for dimming use



- Duplex for dimming both connected loads
- Projecting nubs prevent standard plugs from being used
- Requires replacement plugs for dimming use
- 15A model shown
- Includes 1-gang wallplate

### Duplex for dimming use

15 A	120/125 V*	NTR-15-DFDU- <b>AA</b> <sup>2</sup>
20 A	120/125 V*	NTR-20-DFDU- <b>AA</b> <sup>2</sup>

## Receptacles for dimming use



- Top half for dimming
- Projecting nub prevents standard plug from being used
- Requires replacement plugs for dimming use
- Bottom half is a general use receptacle and will fit standard duplex plugs
- 15A model shown
- Includes 1-gang wallplate

### Split duplex (half for dimming use)

15 A	120/125 V*	NTR-15-HFDU- <b>AA</b> <sup>2</sup>
20 A	120/125 V*	NTR-20-HFDU- <b>AA</b> <sup>2</sup>

## Receptacles for dimming use



- Duplex for dimming both connected loads
- Projecting nubs prevent standard plugs from being used
- Requires replacement plugs for dimming use
- 15A model shown
- Includes 1-gang wallplate
- Tamper resistant shutter mechanism

### Dual dimming tamper resistant

15 A	120/125 V*	NTR-15-DDTR- <b>AA</b> <sup>2</sup>
20 A	120/125 V*	NTR-20-DDTR- <b>AA</b> <sup>2</sup>

## Receptacles for dimming use



- Top half for dimming
- Projecting nub prevents standard plug from being used
- Requires replacement plugs for dimming use
- Bottom half is a general use receptacle and will fit standard duplex plugs
- 15A model shown
- Includes 1-gang wallplate
- Tamper resistant shutter mechanism

### Half dimming tamper resistant

15 A	120/125 V*	NTR-15-HDTR- <b>AA</b> <sup>2</sup>
20 A	120/125 V*	NTR-20-HDTR- <b>AA</b> <sup>2</sup>

**AA**<sup>2</sup>: Architectural matte color codes, see pg. 153 (1-gang wallplate included)

\*Metal finishes are only available as separate wallplates. Match with separate Black (BL) controls and accessories.

## Replacement plugs for dimming (use with receptacles)



- This plug required for use with Lutron® receptacles for dimming use—plug will work in standard receptacle
- Easily replaces the existing plugs on lamps

120/125V White	RP-FDU-10-WH
120/125V Brown	RP-FDU-10-BR

UL/CSA/NOM regulatory approvals

### Important application notes:

- Receptacles and plugs for dimming use are UL listed for use with all Lutron wallbox dimmers included in this catalog
- If there is only one electrical feed to the receptacle, then the duplex DFDU must be used
- If the hot and dimmed hot feeds to the split duplex HFDU are supplied from different circuits or split-wired, with separate switch-legs, a means to simultaneously disconnect these circuits must be provided at the panel board where they originate (NEC 210.7(C) 2002 Edition). A 2-pole circuit breaker or two single-pole circuit breakers with an approved handle tie can be used to accomplish this simultaneous disconnect. Feed-through dimming panels, which are those without breakers, are recommended when using the HFDU.
- For detailed information, see Application Notes #91 (Guide to Dimming Table Lamps) and #109 (Guide to Dimming Portable Lamps via Receptacles) at [www.lutron.com/applicationnotes](http://www.lutron.com/applicationnotes)

**AA**<sup>2</sup>: Architectural matte color codes, see pg. 153 (1-gang wallplate included)

\*Metal finishes are only available as separate wallplates. Match with separate Black (BL) controls and accessories.



## Field customizable 6-port frame




- Shipped with six blanks in matching colors
- Connectors sold separately
- Connectors snap in (no tools required)
- Includes 1-gang wallplate
- Connectors available in White (WH) only unless noted

Multiple devices with line and low-voltage can be mounted behind a common wallplate using a standard barrier backbox, see Application Note #213 (Combining Low-Voltage and Line Voltage Wiring Devices in a Multi-Gang Box) at [www.lutron.com/applicationnotes](http://www.lutron.com/applicationnotes).





6-port frame*	NT-6PF- <b>AA</b> <sup>2</sup>
---------------	--------------------------------

## Connectors for 6-port frame

### Telephone/network jacks

 8-conductor, RJ45 category 3	CON-1P-C3- <b>EE</b> <sup>4</sup>
8-conductor, RJ45 category 5e	CON-1P-C5E- <b>EE</b> <sup>4</sup>
8-conductor, RJ45 category 6	CON-1P-C6- <b>EE</b> <sup>4</sup>


### Fiber jacks

 MT-RJ feed through	CON-1F-MTRJ-WH
 SC simplex	CON-1F-SC-WH
 LC non-flush mount	CON-1F-LC-WH
 ST style	CON-1F-ST-WH

### Cable jack

 F-style, 75-Ohm coaxial cable	CON-1C- <b>EE</b> <sup>4</sup>
---	--------------------------------

### BNC jack

 BNC connector, 50-Ohm	CON-1B-WH
---	-----------

Connectors only for use with 6-port frame.

**AA**<sup>2</sup>: Architectural matte color codes, see pg. 153  
**EE**<sup>4</sup>: Only available in White (WH) and Black (BL)

\*Metal finishes are only available as separate wallplates. Match with separate Black (BL) controls and accessories.

## How to understand ganging and derating

### Standard ganging

Ganging is the side-by-side mounting of two or more dimmers or accessory devices under a multi-gang wallplate.

Standard multi-gang installation:

- Uses standard multi-gang electrical backboxes
- Uses standard multi-gang wallplates
- Requires fins to be removed from dimmers for proper spacing (“Fins Broken” ganging)
- May require derating (i.e., reduction of dimmer capacity due to fin removal), see Derating Tables, pgs. 172–173

### Custom ganging for Architectural style controls

For Architectural style dimmers and switches, it is possible to retain the maximum capacity of dimmers in multi-gang applications via custom architectural multi-gang:

- May require customized, wider-than-standard wallplates
- May require wider-than-standard electrical backboxes
- Allows full capacity (“No Fins Broken”) ganging
- Required for Nova® dimmers and for larger width (high capacity) architectural controls
- Visit [www.lutron.com/customganging](http://www.lutron.com/customganging) for additional information

## Standard ganging for dimmers, switches and accessories

### New Architectural



pg. 148

### Architectural



pg. 152

### Designer



pg. 160

### Traditional



pg. 166



Vierti®



Vareo®  
Nova T☆®



Maestro®  
Maestro IR®  
Maestro Wireless®  
Spacer System®  
Diva®  
Lyneo® Lx  
Skylark®  
Skylark Contour™



Abella®  
Ceana®  
Ariadni®  
Glyder®  
Rotary

Derating Table 1  
pg. 172

Derating Table 2  
pg. 173

Derating Table 1  
pg. 172

Derating Table 1  
pg. 172

**Standard ganging and fins broken derating examples:**



**Custom Architectural ganging example:**



For further information on ganging and derating, visit [www.lutron.com/multigang](http://www.lutron.com/multigang).

\*The fins are scored and designed to be removed easily.

**Derating Table 1**

**New Architectural** | Verti®

**Designer** | Maestro®, Maestro IR®, Maestro Wireless®, Spacer System®, Diva®, Lyneo® Lx, Skylark Contour™, Skylark®

**Traditional** | Abella®, Ceano®, Ariadni®, Glyder®, Rotary



**No fins broken**



**1 fin broken**



**2 fins broken**

	No fins broken	1 fin broken	2 fins broken
<b>Incandescent</b>			
Dimmers	600W	500W	400W
	1000W	800W	650W
Dual dimmers	300W	250W	200W
	300W	250W	200W
<b>Magnetic low-voltage</b>			
Dimmers	600VA/450W	500VA/400W	400VA/300W
	1000VA/800W	800VA/650W	650VA/500W
<b>Electronic low-voltage</b>			
Dimmers	300W	250W	200W
	500W	450W	400W
	600W	500W	400W
<b>Fluorescent</b>			
<b>Hi-lume®/Hi-lume® Compact SE/Eco-10®/EcoSystem®</b>			
Verti	60 ballasts/6A	50 ballasts/5A	35 ballasts/3.5A
Maestro/Spacer System	20 ballasts/6A	20 ballasts/5A	20 ballasts/3.5A
Diva, Skylark, Lyneo Lx and Ariadni	no derating	no derating	no derating
Tu-Wire®: Spacer System, Diva, Skylark	5A	4A	3.3A
<b>Fan controls</b>			
Quiet 7-speed	1.0A/300W	1.0A/300W	1.0A/300W
Quiet 3-speed	1.5A	1.5A	1.5A
Fully variable	5A	4A	3A
<b>Fan/light controls</b>			
Quiet 7-speed	1.0A/300W	1.0A/300W	1.0A/300W
Quiet 3-speed	1.5A/300W	1.5A/300W	1.5A/300W
	1.5A/360W	1.5A/360W	1.5A/360W
Fully variable	2.5A/300W	2.1A/250W	1.7A/200W
<b>Electronic switches</b>			
Verti	6A/3A	5A/3A	3.5A/3A
Maestro (light/fan)	8A/3A	6.5A/3A	5A/3A
Abella (light/fan)	6A/3A	5A/3A	3.5A/3A

**Derating Table 2**

**Architectural** | Vareo®, Nova T☆®



**No fins broken**



**1 fin broken**



**2 fins broken**

	No fins broken	1 fin broken	2 fins broken
<b>Incandescent</b>			
Dimmers	600W	500W	300W
	1000W	900W	700W
	1500W	1250W	1000W
	1950W	–	–
<b>Magnetic low-voltage</b>			
Dimmers	600 VA/450 W	500 VA/400 W	300 VA/250 W
	1000 VA/800 W	900 VA/750 W	700 VA/500 W
	1500 VA/1200 W	1250 VA/1000 W	1000 VA/800 W
<b>Electronic low-voltage</b>			
Dimmers	300W	300W	250W
	600W	500W	400W
<b>Fluorescent</b>			
<b>Hi-lume®/Hi-lume® Compact SE/Eco-10®/EcoSystem®</b>			
Vareo	20 ballasts /8 A	20 ballasts /6 A	20 ballasts /4.5 A
Nova T☆	6 A	no derating	no derating
	8 A	no derating	no derating
	16 A	no derating	no derating
0-10VDC control <sup>1</sup>	30mA ballasts	no derating	no derating
Tu-Wire®	5 A	4 A	3.3 A
<b>Fan controls</b>			
Quiet 3-speed	1.5 A	no derating	no derating
Fully variable	6 A	4.2 A	2.5 A
Fully variable	12 A	10 A	8.3 A
<b>Electronic tapswitches<sup>2</sup></b>			
VETS-1000-	1000W	800W	650W
VETS-1000-SL-	1000W	900W	700W
VETN-1000-	1000 VA	700 VA	550 VA

For further information on ganging Nova®, visit [www.lutron.com/customganging](http://www.lutron.com/customganging).

<sup>1</sup>PowerPack required for line voltage switching.

<sup>2</sup>VETS-R-Auxiliary electronic tapswitches do not require derating.

## Dimmer capabilities and interface requirements

- M** Multi-location—true dimming from each location
- E** eco-model available
- Compatible dimmer (no interface)
- WBX** **TVI** **3F** **PA** Requires interface, see notes below



Dimmers	capacity†	M				
<b>Incandescent/halogen</b> 120V	600W			<b>M</b>		
	1000W			<b>M</b>		
	1500W		<b>WBX</b>			
	2000W		<b>WBX</b>			
<b>Magnetic low-voltage</b> 120V	600VA (450W)					
	1000VA (800W)					
	1500VA (1200W)		<b>WBX</b>			
	2000VA (1600W)		<b>WBX</b>	<b>WBX</b>		
<b>Magnetic low-voltage</b> 277V	600VA (450W)		<b>WBX</b>		<b>WBX</b>	
	1000VA (800W)		<b>WBX</b>		<b>WBX</b>	
<b>Electronic low-voltage</b> 120V	300W		<b>WBX</b>			
	450W		<b>WBX</b>	<b>WBX</b>		
	600W		<b>WBX</b>		<b>WBX</b>	
<b>Electronic low-voltage</b> 277V	16A		<b>WBX</b>	<b>WBX</b>	<b>WBX</b>	
<b>Neon/cold cathode</b>			<b>WBX</b>	<b>WBX</b>		
<b>3-wire ballasts and Hi-lume® LED driver</b> 120V	6A					
	Hi-lume, Hi-lume Compact SE, Eco-10® and EcoSystem® ballasts	8A				
	16A		<b>3F</b>			
<b>3-wire ballasts and Hi-lume LED driver</b> 277V	6A		<b>3F</b>			
	Hi-lume, Hi-lume Compact SE, Eco-10 and EcoSystem ballasts	8A		<b>3F</b>		
	16A		<b>3F</b>	<b>3F</b>	<b>3F</b>	
<b>Tu-Wire®</b> ballasts 120V	5A		<b>PA</b>			
<b>0-10VDC</b> (ballasts or LED Drivers) 120/277V	16A	<b>TVI</b>	<b>TVI</b>			

**WBX:** Wallbox Phase Adaptive Power Module (PHPM-WBX-DV-WH)

**3F:** Fluorescent Power Module (PHPM-3F-DV-WH)

**TVI:** 0-10V Interface (GRX-TVI)

**PA:** Phase Adaptive Power Module (PHPM-PA-DV-WH)

**See pgs. 178–179 for specific compatible dimmer models and switching interface solutions.**

\*Consult Lutron Technical Support for information on interfaces with Vierti.

†UL listed for FULL wattage indicated (derate capacity only if ganged with other devices).

## Dimmer capabilities and interface requirements

**M** Multi-location—true dimming from each location

**E** eco-model available

 Compatible dimmer (no interface)

**WBX** **TVI** **3F** **PA** Requires interface, see notes below



Dimmers	capacity†	<b>M</b>	<b>M</b>	<b>M</b>	<b>M</b>		
 <b>Incandescent/halogen</b> 120V	600W	<b>E</b>				<b>E</b>	
	1000W						
	1500W	<b>WBX</b>		<b>WBX</b>	<b>WBX</b>	<b>WBX</b>	
	2000W	<b>WBX</b>		<b>WBX</b>	<b>WBX</b>	<b>WBX</b>	
 <b>Magnetic low-voltage</b> 120V	600VA (450W)						
	1000VA (800W)						
	1500VA (1200W)	<b>WBX</b>		<b>WBX</b>	<b>WBX</b>	<b>WBX</b>	
	2000VA (1600W)	<b>WBX</b>		<b>WBX</b>	<b>WBX</b>	<b>WBX</b>	
 <b>Magnetic low-voltage</b> 277V	600VA (450W)	<b>WBX</b>		<b>WBX</b>	<b>WBX</b>	<b>WBX</b>	
	1000VA (800W)	<b>WBX</b>		<b>WBX</b>	<b>WBX</b>	<b>WBX</b>	
 <b>Electronic low-voltage</b> 120V	300W			<b>WBX</b>			
	450W			<b>WBX</b>		<b>WBX</b>	
	600W			<b>WBX</b>		<b>WBX</b>	
 <b>Electronic low-voltage</b> 277V	16A	<b>WBX</b>		<b>WBX</b>	<b>WBX</b>	<b>WBX</b>	
 <b>Neon/cold cathode</b>				<b>WBX</b>		<b>WBX</b>	
 <b>3-wire ballasts and Hi-lume® LED driver</b> 120V	6A						
	Hi-lume, Hi-lume Compact SE, Eco-10® and EcoSystem® ballasts	8A	<b>3F</b>		<b>3F</b>	<b>3F</b>	
	16A	<b>3F</b>		<b>3F</b>	<b>3F</b>	<b>3F</b>	
 <b>3-wire ballasts and Hi-lume LED driver</b> 277V	6A						
	Hi-lume, Hi-lume Compact SE, Eco-10 and EcoSystem ballasts	8A	<b>3F</b>		<b>3F</b>	<b>3F</b>	<b>3F</b>
	16A	<b>3F</b>		<b>3F</b>	<b>3F</b>	<b>3F</b>	
 <b>Tu-Wire®</b> ballasts 120V	5A	<b>PA</b>		<b>PA</b>			
 <b>0-10VDC</b> (ballasts or LED Drivers) 120/277V	16A	<b>TVI</b>		<b>TVI</b>	<b>TVI</b>	<b>TVI</b>	

**WBX:** Wallbox Phase Adaptive Power Module (PHPM-WBX-DV-WH)

**3F:** Fluorescent Power Module (PHPM-3F-DV-WH)

**TVI:** 0-10V Interface (GRX-TVI)

**PA:** Phase Adaptive Power Module (PHPM-PA-DV-WH)

See pgs. 178–179 for specific compatible dimmer models and switching interface solutions.

†UL listed for FULL wattage indicated (derate capacity only if ganged with other devices).

## Dimmer capabilities and interface requirements

**M** Multi-location—true dimming from each location

**E** eco-model available

 Compatible dimmer (no interface)

**WBX** **TVI** **3F** **PA** Requires interface, see notes below

					
		Lyneo® Lx pg. 94	Skylark Contour™ pg. 100	Skylark® pg. 104	Abella® pg. 114
Dimmers	capacity†				<b>M</b>
 <b>Incandescent/halogen</b> 120V	600W		<b>E</b>	<b>E</b>	
	1000W				
	1500W	<b>WBX</b>		<b>WBX</b>	
	2000W	<b>WBX</b>		<b>WBX</b>	
 <b>Magnetic low-voltage</b> 120V	600 VA (450W)				
	1000 VA (800W)			<b>WBX</b>	
	1500 VA (1200W)	<b>WBX</b>		<b>WBX</b>	
	2000 VA (1600W)	<b>WBX</b>		<b>WBX</b>	
 <b>Magnetic low-voltage</b> 277V	600 VA (450W)	<b>WBX</b>		<b>WBX</b>	
	1000 VA (800W)	<b>WBX</b>		<b>WBX</b>	
 <b>Electronic low-voltage</b> 120V	300W				
	450W			<b>WBX</b>	
	600W			<b>WBX</b>	
 <b>Electronic low-voltage</b> 277V	16A	<b>WBX</b>		<b>WBX</b>	
 <b>Neon/cold cathode</b>		<b>WBX</b>		<b>WBX</b>	
 <b>3-wire ballasts and Hi-lume® LED driver</b> 120V	6A				
	Hi-lume, Hi-lume Compact SE, Eco-10® and EcoSystem® ballasts	8A			
		16A	<b>3F</b>		<b>3F</b>
 <b>3-wire ballasts and Hi-lume LED driver</b> 277V	6A				
	Hi-lume, Hi-lume Compact SE, Eco-10 and EcoSystem ballasts	8A	<b>3F</b>		<b>3F</b>
		16A	<b>3F</b>		<b>3F</b>
 <b>Tu-Wire® ballasts</b> 120V	5A	<b>PA</b>			
 <b>0-10VDC</b> (ballasts or LED Drivers) 120/277V	16A	<b>TVI</b>		<b>TVI</b>	

**WBX:** Wallbox Phase Adaptive Power Module (PHPM-WBX-DV-WH)

**3F:** Fluorescent Power Module (PHPM-3F-DV-WH)

**See pgs. 178–179 for specific compatible dimmer models and switching interface solutions.**

**TVI:** 0-10V Interface (GRX-TVI)

**PA:** Phase Adaptive Power Module (PHPM-PA-DV-WH)

†UL listed for FULL wattage indicated (derate capacity only if ganged with other devices).



## Dimmer capabilities and interface requirements

- M** Multi-location—true dimming from each location
- E** eco-model available
- Compatible dimmer (no interface)
- WBX** **TVI** **3F** **PA** Requires interface, see notes below



Dimmers	capacity†				
 <b>Incandescent/halogen</b> 120V	600W		<b>E</b>		<b>E</b>
	1000W				
	1500W		<b>WBX</b>		
	2000W		<b>WBX</b>		
 <b>Magnetic low-voltage</b> 120V	600 VA (450W)				
	1000 VA (800W)				
	1500 VA (1200W)		<b>WBX</b>		
	2000 VA (1600W)		<b>WBX</b>		
 <b>Magnetic low-voltage</b> 277V	600 VA (450W)		<b>WBX</b>		
	1000 VA (800W)		<b>WBX</b>		
 <b>Electronic low-voltage</b> 120V	300W		<b>WBX</b>		
	450W		<b>WBX</b>		
	600W		<b>WBX</b>		
 <b>Electronic low-voltage</b> 277V	16A		<b>WBX</b>		
 <b>Neon/cold cathode</b>			<b>WBX</b>		
 <b>3-wire ballasts and Hi-lume® LED driver</b> 120V 6A	Hi-lume, Hi-lume Compact SE,	8A			
	Eco-10® and EcoSystem® ballasts	16A		<b>3F</b>	
 <b>3-wire ballasts and Hi-lume LED driver</b> 277V 6A	Hi-lume, Hi-lume Compact SE,	8A		<b>3F</b>	
	Eco-10 and EcoSystem ballasts	16A		<b>3F</b>	
 <b>Tu-Wire®</b> ballasts 120V	5A		<b>PA</b>		
 <b>0-10VDC</b> (ballasts or LED Drivers) 120/277V	16A		<b>TVI</b>		

**WBX:** Wallbox Phase Adaptive Power Module (PHPM-WBX-DV-WH)

**3F:** Fluorescent Power Module (PHPM-3F-DV-WH)

**See pgs. 178–179 for specific compatible dimmer models and switching interface solutions.**

**TVI:** 0-10V Interface (GRX-TVI)

**PA:** Phase Adaptive Power Module (PHPM-PA-DV-WH)

†UL listed for FULL wattage indicated (derate capacity only if ganged with other devices).

**Dimmer models/load interface compatibility**

	Incandescent, magnetic and electronic low-voltage (120/277 V)		3-wire Fluorescent ballasts or Hi-lume® LED drivers (120/277 V)		0-10VDC Ballasts or LED drivers (120/277 V)	
	<b>WBX</b> 		<b>3F</b> 		<b>TVI</b> 	
	Wallbox Phase Adaptive Power Module* PHPM-WBX-DV-WH		Fluorescent Power Module* PHPM-3F-DV-WH		0-10V Interface GRX-TV1	
<b>Dimmer Family</b>	Single-pole	3-way or multi-location	Single-pole	3-way or multi-location	Single-pole	3-way or multi-location
Abella®	–	–	–	–	–	–
Ariadni®	–	AYF-103P-	–	AYF-103P-	–	AYF-103P-
Ceana®	–	–	–	–	–	–
Diva® Gloss	–	DVF-103P-	–	DVF-103P-	–	DVF-103P-
Diva Satin Colors®	–	DVSCF-103P-	–	DVSCF-103P-	–	DVSCF-103P-
Glyder®	–	–	–	–	–	–
Lyneo® Lx	–	LXF-103PL-	–	LXF-103PL-	–	LXF-103PL-
Maestro® Gloss	–	MAF-6AM-	–	MAF-6AM-	–	MAF-6AM-
Maestro® Satin Colors®	–	MSCF-6AM-	–	MSCF-6AM-	–	MSCF-6AM-
Maestro Wireless®	–	MRF2-F6AN-DV-	–	MRF2-F6AN-DV-	–	MRF2-F6AN-DV-
Nova®	NF-10-	NF-103P-	NF-10-	NF-103P-	NF-10-	NF-103P-
Nova T☆®	NTF-10-	NTF-103P-	NTF-10-	NTF-103P-	NTF-10-	NTF-103P-
Skylark®	SF-10P-	SF-103P-	SF-10P-	SF-103P-	SF-10P-	SF-103P-
Spacer System®	–	SPSF-6AM-	–	SPSF-6AM-	SPSF-S6A-	SPSF-6AM-
Vareo®	–	VF-10-	–	VF-10-	–	VF-10-
Vierti®	contact Lutron		contact Lutron		–	VTF-6AM-

**Use only dimmer model numbers listed.**

\*Dual 120/277 V model given, 120V only versions are also available. Please see Technical notes, pg. 179.

## Dimmer models/load interface compatibility

Dimmer Family	Tu-Wire® Fluorescent Ballasts (120V)		Switched Lighting (120/277V)	
	PA		SW	
	Single-pole	3-way or multi-location	Single-pole	3-way or multi-location
Abella®	–	–	–	AB-S6AM-
Ariadni®	–	AYF-103P-	–	–
Ceana®	–	–	–	–
Diva® Gloss	–	DVF-103P-	–	–
Diva Satin Colors®	–	DVSCF-103P-	–	–
Glyder®	–	–	–	–
Lyneo® Lx	–	LXF-103PL-	LX-1PSL-	LX-3PSL-
Maestro® Gloss	–	MAF-6AM-	–	MA-S8AM-
Maestro® Satin Colors®	–	MSCF-6AM-	–	MSC-S8AM-
Maestro Wireless®	–	MRF2-F6AN-DV-	–	MRF2-6ANS-
Nova®	NF-10-	NF-103P-	–	–
Nova T☆®	NTF-10-	NTF-103P-	–	–
Skylark®	SF-10P-	SF-103P-	–	–
Spacer System®	SPSF-S6A-	SPSF-6AM-	SPSF-S6A-	SPSF-S6AM-
Vareo®	–	VF-10-	–	VETN-1000-
Vierti®	contact Lutron		contact Lutron	

### Technical notes

- Lighting load interfaces must be matched to load type and voltage
- All load interfaces for dimmed load are controlled by a 120V 3-wire fluorescent dimmer
- Power feed to dimmer may differ from lighting load/interface voltage
- Interfaces typically require additional power feeds
- For wiring information, consult wiring diagrams, see pgs. 193-195
- For assistance and additional solutions, consult Lutron Technical Support at 1.800.523.9466 (24 hours/7 days)


### Interface mounting

- PHPM interfaces mount to 2-gang electrical backbox (W: 6.30 in x H: 5.10 in)
- GRX-TVI enclosure is surface mount only (W: 6.10 in x H: 12.50 in x D: 3.30 in)

### Use only dimmer model numbers listed.

\*Dual 120/277V model given, 120V only versions are also available. Please see Technical notes, pg. 179.

# Nova T<sup>☆</sup>

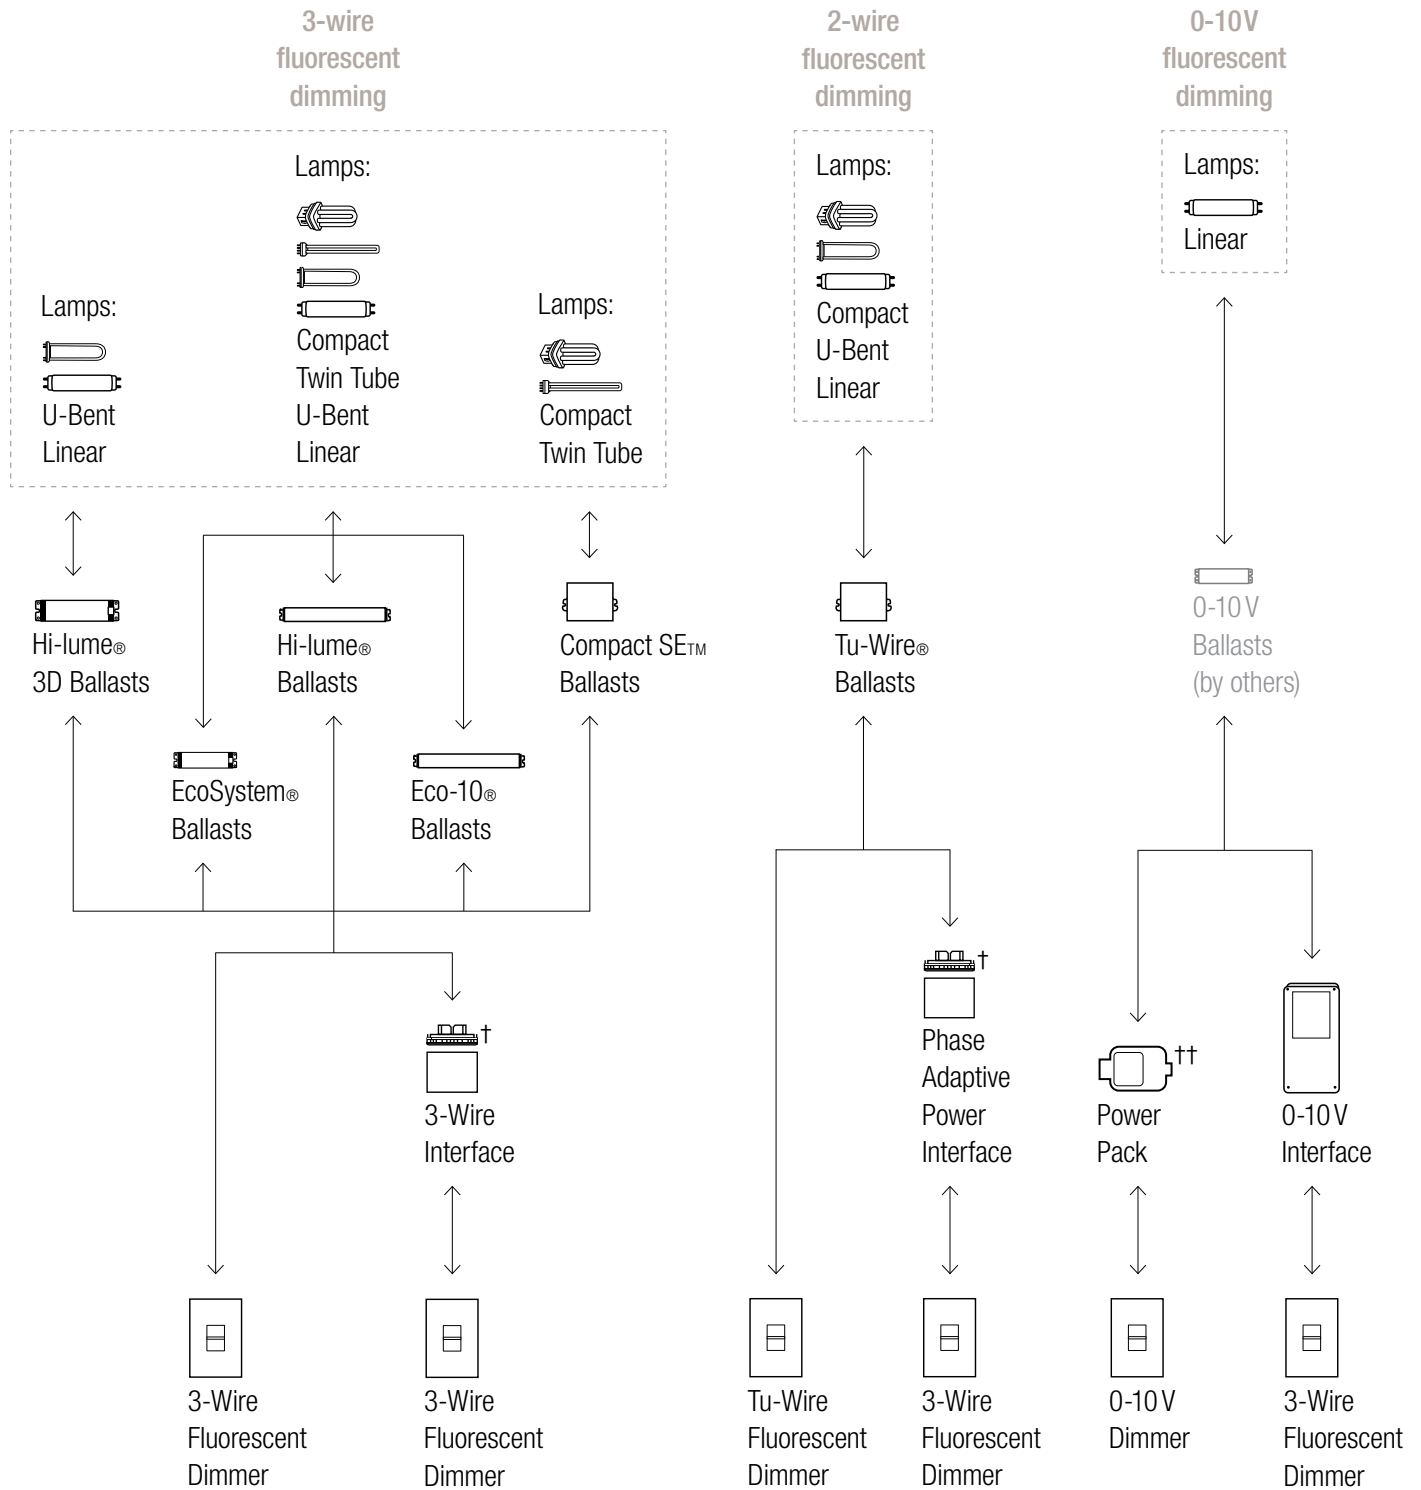


**For illustration purposes only.** Consult model number pages for specific voltage and capacity information.

For ballast information, visit [www.lutron.com/ballasts](http://www.lutron.com/ballasts).

<sup>†</sup>Interface provides additional capacity and/or may be different voltage than dimmer.

<sup>††</sup>PowerPack provides on/off switching to 0-10V load.

Nova T<sup>☆</sup>

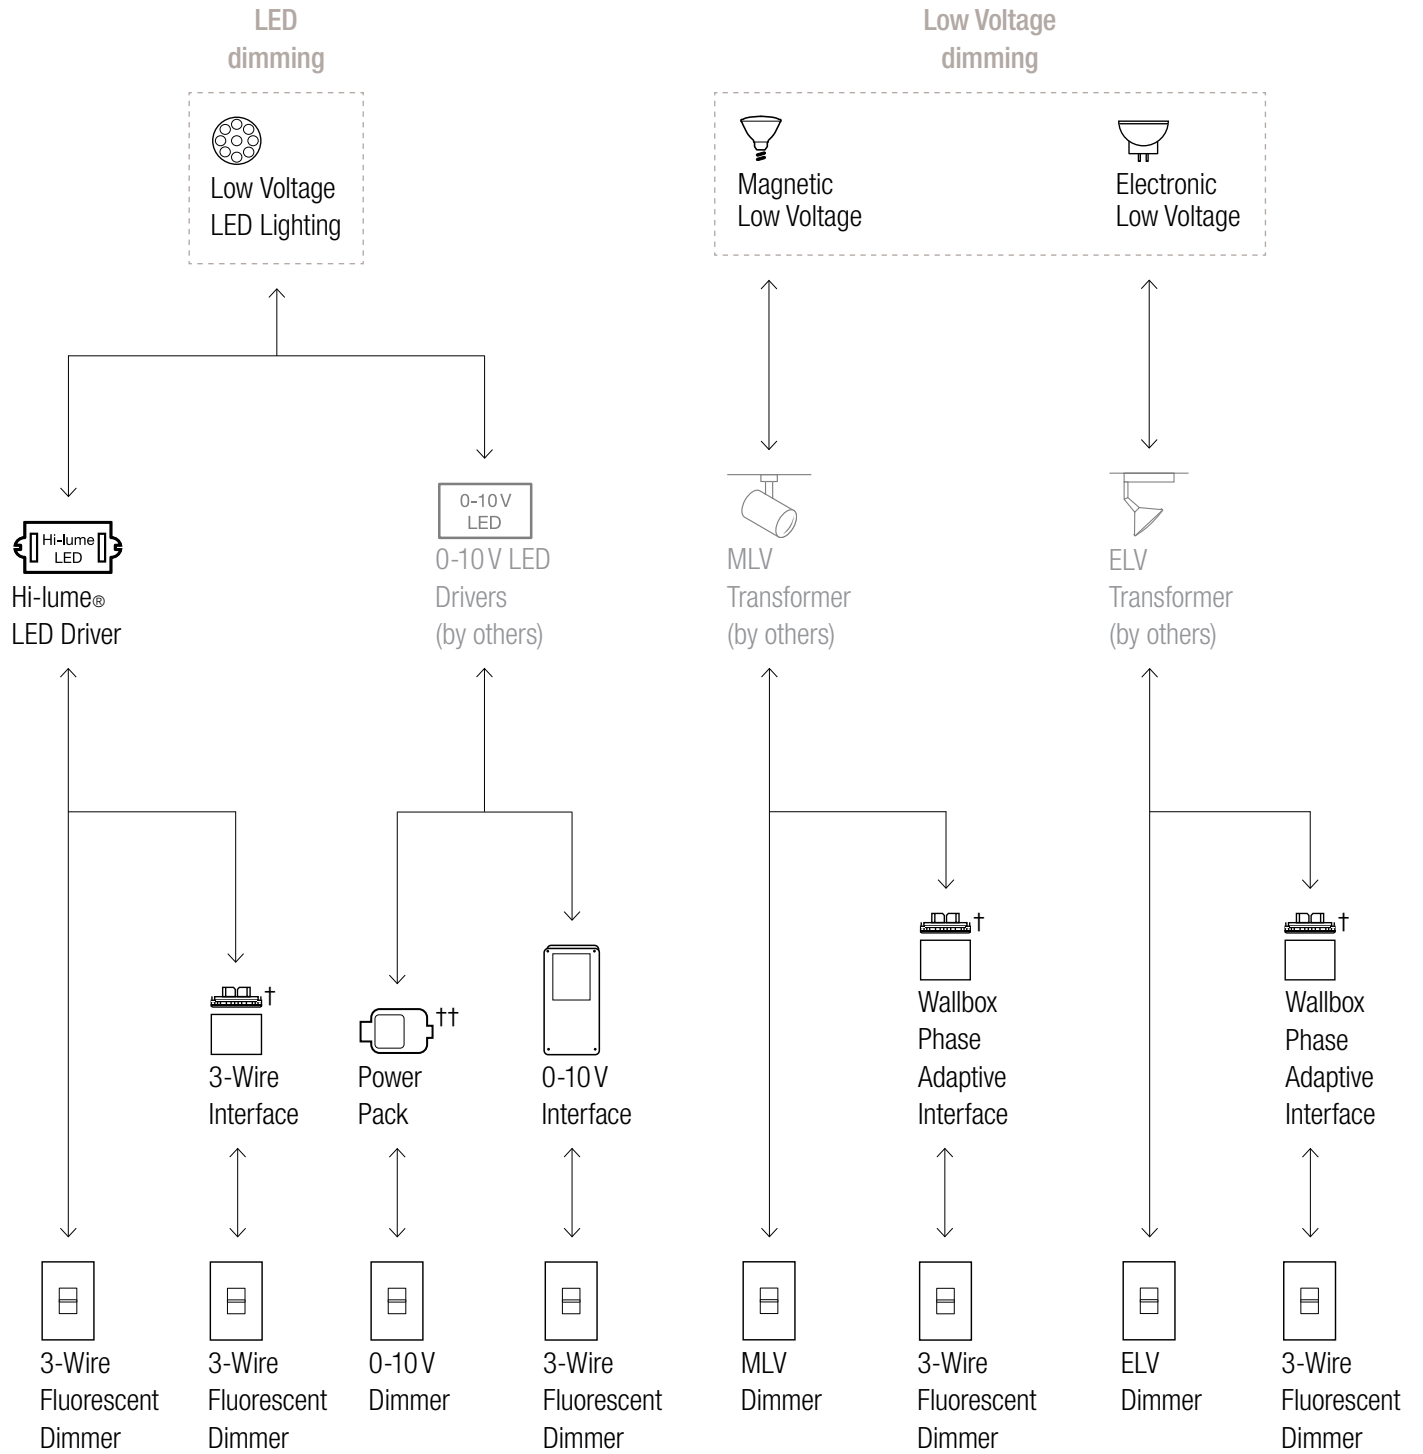


**For illustration purposes only.** Consult model number pages for specific voltage and capacity information.

For more information on LED drivers, visit [www.lutron.com/LED](http://www.lutron.com/LED).

<sup>†</sup>Interface provides additional capacity and/or may be different voltage than dimmer.

<sup>††</sup>PowerPack provides on/off switching to 0-10V load.

Nova T<sup>☆</sup>

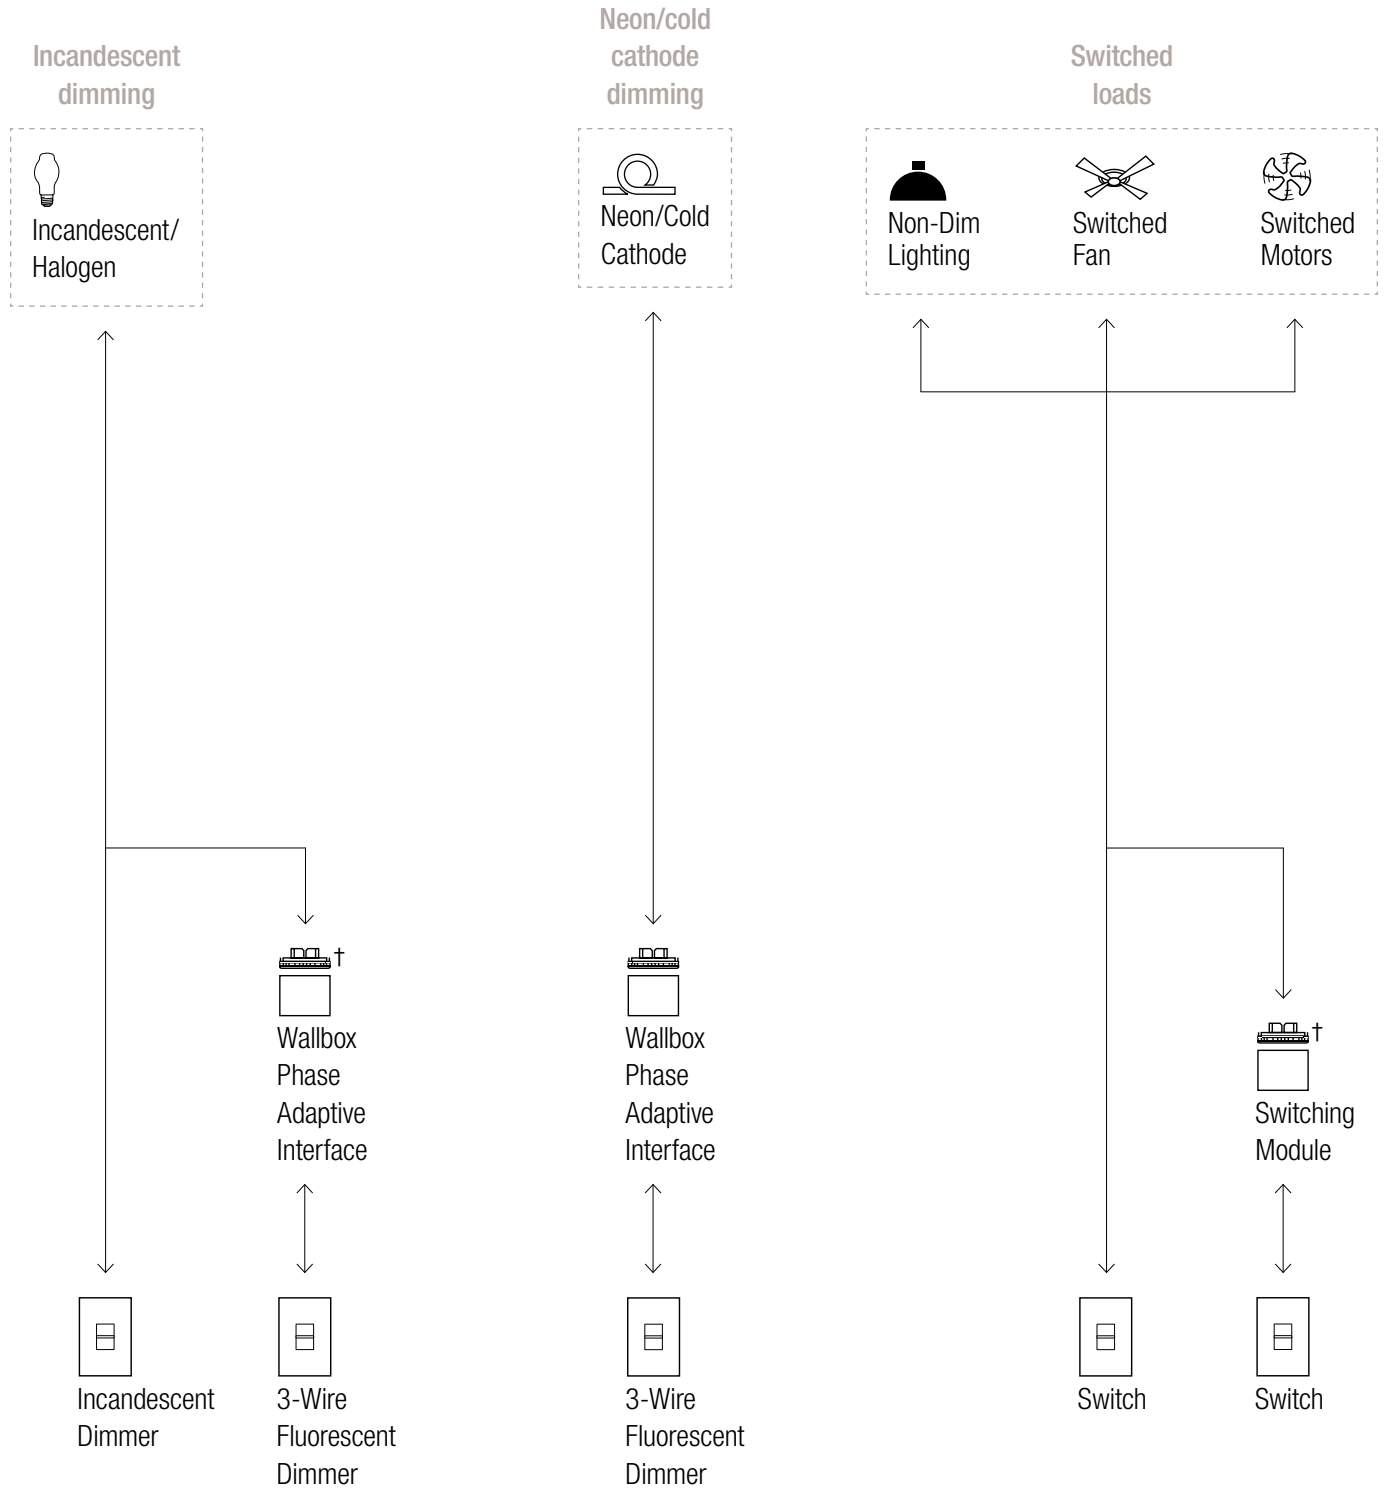

**For illustration purposes only.** Consult model number pages for specific voltage and capacity information.

<sup>†</sup>Interface provides additional capacity and/or may be different voltage than dimmer.

# Nova T<sup>☆</sup>

Ceiling  
fan



Fan  
Control

**For illustration purposes only.** Consult model number pages for specific voltage and capacity information.

## Table of contents

<b>Standard architectural wallplates</b> .....	B1
<b>Customized architectural wallplates</b> .....	B1
<b>Determine which architectural wallplate is right for your application</b> .....	B2
<b>How to construct a wallplate model number</b> .....	B3
<b>Derating tables</b> .....	B9
<b>Multi-gang worksheet</b> .....	B12




## Standard architectural wallplates

Six popular 2-, 3- and 4-gang wallplates in nine matte colors  
(48-hours shipment available)



H: 4.56 in x W: 4.56 in




### Fins broken wallplates (FB)

- Controls fit into standard size backboxes with standard size wallplates
- Dimmers must be derated, pg. 170

### Use with:

- Vareo®
- NovaT☆®
- Architectural accessories
- GRAFIK Eye® seeTouch®, and architectural style wallstations
- HomeWorks® controls


### What's included:




Adapter plate, screws, wallplate (inserts not included)

## Customized architectural wallplates

Create a wallplate for any application

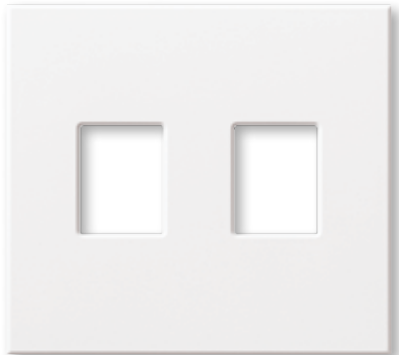

H: 4.56 in x W: 4.56 in




### Fins broken wallplates (FB)

- Controls fit into standard size backboxes with standard size wallplates
- Dimmers must be derated
- Combines large and small controls


### Use with:

- Vareo®
- NovaT☆®
- Architectural accessories
- GRAFIK Eye® seeTouch®, and architectural style wallstations
- HomeWorks® controls


### What's included:



Adapter plate, screws, wallplate (inserts not included)

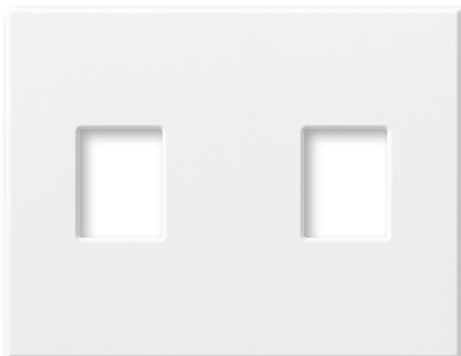

H: 4.56 in x W: 5.41 in



### No fins broken wallplates (NFB)


- Controls require wider-than-standard backboxes and wallplates (see pgs. B7–B8)
- Dimmers can be used to their full capacity
- Combines large and small controls

Multi-gang, screwless, seamless wallplates available—wallplate selector tool at [www.lutron.com/lutron/wallplate](http://www.lutron.com/lutron/wallplate).

Lutron's architectural style controls can be ganged at full dimmer capacity using "No Fins Broken" wallplates. When using "Fins Broken" wallplates, maximum dimmer capacity must be derated. See pg. 170 for complete information on derating a dimmer.

## Determine which architectural wallplate is right for your application

Standard architectural wallplates




### Fins broken wallplates (FB)

- 48-hour shipment available
- Use to conserve horizontal wall space


---

## Custom architectural wallplates



### Fins broken wallplates (FB)

- If you need to conserve horizontal wall space
- If you need to combine large and small controls
- If you need metal wallplates or custom colors



### No fins broken wallplates (NFB)

- If you need to combine large and small controls
- If you need metal wallplates or custom colors
- Require full rating of dimmers


Lutron's architectural style controls can be ganged at full dimmer capacity using "No Fins Broken" wallplates. When using "Fins Broken" wallplates, maximum dimmer capacity must be derated. See pg. 170 for complete information on derating a dimmer.

**How to construct a wallplate model number**

Use the following steps to order multi-gang, metal, and replacement wallplates

**1 product code**

**NT** Thin profile (D: 0.3in or 7.6 mm)

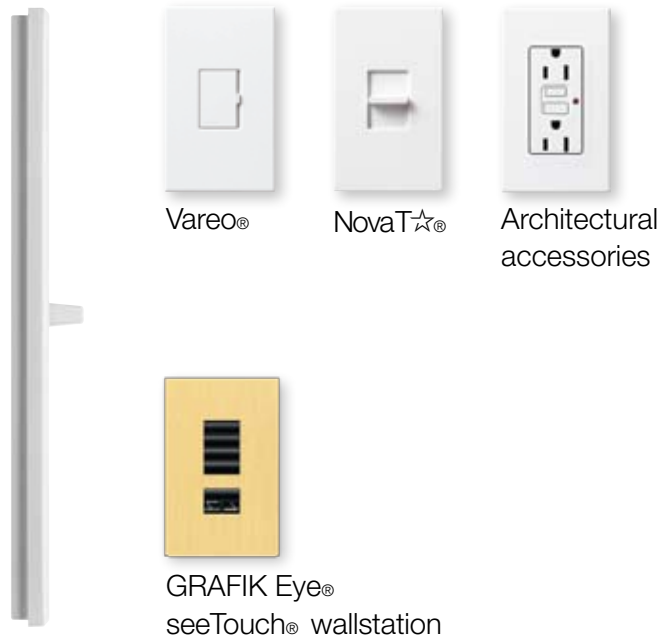

**N** Wide profile (D: 0.65in or 16.5 mm)



When ganging products together under a common wallplate the product's depth must be the same style (NT or N).

**2 insert code(s)**



The detachable face of the product is called an insert. Each product has its own Insert Code, see pgs. B5–B6 for a complete listing of model numbers and their insert codes.

Select Insert Codes and add to model numbers in left to right order as if looking at the front of the wallplate (see example at the bottom of this page).




Inserts used in a fins broken application.  
From left to right:  
NovaT® (small control)  
Vareo® (small control)  
NovaT® (large control)

**NT-SOL-FB-WH**

**NT-SOL-FB-WH**


## 3 ganging code

### FB



Fins broken


### NFB



No fins broken

Mixing small and large controls



**Correct:** group small and large at either end



**Incorrect:** do not alternate small and large



4.5 in required for vertical installations



Determine whether controls need to use maximum load capacity or can be derated. Derating is the reduction of the maximum capacity (load) a unit can reliably handle when fins/side sections are removed. A scored section along each side of the mounting plate/fin is designed to be removed to facilitate ganging.

See pg. 170 for more information about your specific product's derated capacities. Note: If **any** controls are ganged under the same wallplate with no fins broken, then the ganging code is NFB.

# NT-SOL-FB-WH

## 4 color code

### Available colors

**Colors** (architectural matte finish) (3–5 days)\*

<b>WH</b> White	<b>GR</b> Gray
<b>BE</b> Beige	<b>TP</b> Taupe
<b>IV</b> Ivory	<b>BR</b> Brown
<b>AL</b> Almond	<b>BL</b> Black
<b>LA</b> Light Almond	<b>SI</b> Sienna

**Metals** (special finishes) (4–6 weeks)†

<b>SB</b> Satin Brass	<b>SC</b> Satin Chrome
<b>BB</b> Bright Brass	<b>SN</b> Satin Nickel
<b>BC</b> Bright Chrome	<b>BN</b> Bright Nickel
<b>QB</b> Antique Brass	<b>AU</b> Gold Plated
<b>QZ</b> Antique Bronze	

### Anodized aluminum

<b>CLA</b> Clear	<b>BRA</b> Brass
<b>BLA</b> Black	

Custom colors and finishes are available by providing Lutron® with a paint color number, swatch, or sample. Lutron can color match your controls. Contact Customer Service at 1.888.LUTRON1.

Multi-gang, screwless, seamless wallplates available—wallplate selector tool at [www.lutron.com/lutron/wallplate](http://www.lutron.com/lutron/wallplate).

CAD file downloads available at [www.lutron.com/technical\\_info/cad](http://www.lutron.com/technical_info/cad).

\*Most matte wallplates ship in 3-5 days; wider wallplates require additional time.

†Consult Lutron® Customer Service for pricing and delivery at 1.888.LUTRON1.

# NT-SOL-FB-WH

Model Number	Insert Code	Control Size
<b>Vareo®</b>		
V-600-	<b>O</b>	small
V-1000-	<b>O</b>	small
VETN-1000-	<b>K</b>	small
VETS-1000-	<b>K</b>	small
VETS-1000-SL-	<b>H</b>	small
VETS-A-SL-	<b>H</b>	small
VETS-R-	<b>K</b>	small
VF-10-	<b>O</b>	small
<b>Nova T<sup>☆</sup>®</b>		
NT-1PS-	<b>S</b>	small
NT-3PS-	<b>S</b>	small
NT-4PS-	<b>S</b>	small
NT-600-	<b>S</b>	small
NT-603P-	<b>P</b>	small
NT-1000-	<b>S</b>	small
NT-1003P-	<b>P</b>	small
NT-1500-	<b>L</b>	large
NT-1503P-	<b>U</b>	large
NT-2000-*	<b>TF</b>	large
NT-DPDT-CO-MA-	<b>S</b>	small
NT-DPDT-CO-MO-	<b>S</b>	small
NTA-2-	<b>S</b>	small
NTB-600-	<b>S</b>	small
NTB-1000-	<b>S</b>	small
NTELV-300-	<b>S</b>	small
NTELV-600-	<b>S</b>	small
NTF-10-	<b>S</b>	small
NTF-103P-	<b>P</b>	small
NTFS-6E-	<b>S</b>	small
NTFS-12E-	<b>L</b>	large
NTFSQ-	<b>S</b>	small
NTFTU-5A-	<b>S</b>	small
NTFTV	<b>S</b>	small
NTLV-600-	<b>S</b>	small
NTLV-603P-	<b>P</b>	small
NTLV-1000-	<b>S</b>	small
NTLV-1003P-	<b>P</b>	small
NTLV-1500-	<b>L</b>	large
NTLV-1503P-	<b>U</b>	large

Model Number	Insert Code	Control Size
<b>Accessories</b>		
NT-6PF-	<b>R3<sup>1</sup></b>	small
NT-CJ-	<b>9</b>	small
NT-PJ-	<b>8</b>	small
NT-PJ8CJ-	<b>TE</b>	small
NT-PJ8X2-	<b>TC</b>	small
NT-PJ8X3-	<b>TD</b>	small
NTR-15-	<b>R</b>	small
NTR-15-GFCI-	<b>R3<sup>1</sup></b>	small
NTR-15-IG-OR-	<b>R<sup>1</sup></b>	small
NTR-20-	<b>4</b>	small
NTR-20-GFCI-	<b>R3<sup>1</sup></b>	small
NTR-20-IG-OR-	<b>R<sup>1</sup></b>	small
<b>GRAFIK Eye® Wallstations</b>		
NTGRX-1S-	<b>K</b>	small
NTGRX-2B-SL-	<b>T8</b>	small
NTGRX-4B-	<b>T5</b>	small
NTGRX-4M-	<b>T1</b>	small
NTGRX-4S-	<b>A</b>	small
NTGRX-4S-IR-	<b>A</b>	small
NTGRX-SI4S-IR-	<b>A</b>	small
SG-2BI-	<b>R3</b>	small
SG-4BI-	<b>R3</b>	small
SG-4MI-	<b>R3</b>	small
SG-4NRLI-	<b>R3</b>	small
SG-4SI-	<b>R3</b>	small
SG-4SIRI-	<b>R3</b>	small

**Blank Inserts and Yokes**

For each blank ordered, order one yoke to attach wallplate to backbox.

small blank insert      **E\***      small  
 large blank insert      **G\*\***      large



\*small yoke

\*\*large yoke

**NT-YS**

**NT-YL**

\*NT-2000- must use NFB Series only.  
<sup>1</sup>Product insert is permanently attached. Order the device in the color desired, wallplate will not have an insert to change the device color in the field.


Model Number	Insert Code	Control Size
<b>Nova®</b>		
N-1PS-	<b>S</b>	small
N-1PS-374- -CSA-	<b>S</b>	small
N-3PS-	<b>S</b>	small
N-3PS-374- -CSA-	<b>S</b>	small
N-4PS-	<b>S</b>	small
N-600-	<b>S</b>	small
N-603P-	<b>P</b>	small
N-1000-	<b>S</b>	small
N-1003P-	<b>P</b>	small
N-1500-	<b>L</b>	large
N-1503P-	<b>U</b>	large
N-2000-	<b>L</b>	large
N-2003P-	<b>U</b>	large
NELV-450-	<b>S</b>	small
NF-10-	<b>S</b>	small
NF-10-277-	<b>L</b>	large
NF-103P-	<b>P</b>	small
NF-103P-277-	<b>P</b>	small
NF-20-	<b>L</b>	large
NF-20-277-	<b>L</b>	large
NF-30-	<b>L</b>	large
NFS-6E-	<b>S</b>	small
NFS-12E-	<b>L</b>	large
NFTV-	<b>S</b>	small
NLV-600-	<b>S</b>	small
NLV-603P-	<b>P</b>	small
NLV-1000-	<b>L</b>	large
NLV-1003P-	<b>P</b>	small
NLV-1500-	<b>L</b>	large
NLV-1503P-	<b>U</b>	large
NLV-2003P-	<b>U</b>	large

## Blank Inserts and Yokes

For each blank ordered, order one yoke to attach wallplate to backbox.

small blank insert      **E\***      small

large blank insert      **G\*\***      large



\*small yoke

\*\*large yoke

**N-YS**

**N-YL**

## Available colors Nova T<sup>☆</sup>®/Vareo® ONLY

**Colors** (architectural matte finish) (3-5 days)\*

<b>WH</b> White	<b>GR</b> Gray
<b>BE</b> Beige	<b>TP</b> Taupe
<b>IV</b> Ivory	<b>BR</b> Brown
<b>AL</b> Almond	<b>BL</b> Black
<b>LA</b> Light Almond	<b>SI</b> Sienna

**Metals** (special finishes) (4-6 weeks)†

<b>SB</b> Satin Brass	<b>SC</b> Satin Chrome
<b>BB</b> Bright Brass	<b>SN</b> Satin Nickel
<b>BC</b> Bright Chrome	<b>BN</b> Bright Nickel
<b>QB</b> Antique Brass	<b>AU</b> Gold Plated
<b>QZ</b> Antique Bronze	

## Anodized aluminum

<b>CLA</b> Clear	<b>BRA</b> Brass
<b>BLA</b> Black	


## Available colors Nova® ONLY

**Colors** (architectural matte finish) (3-5 days)\*

<b>WH</b> White	<b>LA</b> Light Almond
<b>BE</b> Beige	<b>GR</b> Gray
<b>IV</b> Ivory	<b>BR</b> Brown
<b>AL</b> Almond	<b>BL</b> Black

\*Most matte wallplates ship in 3–5 days; wider wallplates require additional time.



†Consult Lutron® Customer Service for pricing and delivery at 1.888.LUTRON1.




- No fins broken wallplates (NFB)** (no derating required—full rated capacity)
- For Vareo® and Nova T☆® installations

For use with installations that **DO NOT** include an NT-2000-

		Number of Small Controls					
		0	1	2	3	4	5
Number of Large Controls	0	NA	1 2.75 in	1+1 5.41 in	4 8.14 in	4+1 10.86 in	7 13.50 in
	1	1 4.56 in	3 7.22 in	5 10.01 in	6 12.68 in		
	2	4 9.09 in	6 11.82 in	7 14.49 in			
	3	6 13.63 in			For larger wallplate configurations, contact Lutron® Customer Service.		


  

  
 number of backboxes  
 wallplate width





- No fins broken wallplates (NFB)** (no derating required—full rated capacity)
- For Vareo® and Nova T☆® installations
  - NT-2000- can be used




NT-2000-

		Number of Small Controls			
		0	1	2	3
Number of Large Controls	1	2 4.56 in	2+1 7.22 in	2+1+1 10.01 in	2+4 12.68 in
	2	2+2 9.09 in	2+2+1 11.82 in	2+2+1+1 14.49 in	
	3	2+2+2 13.63 in	For larger wallplate configurations, contact Lutron® Customer Service.		




  

  
 number of backboxes  
 wallplate width

Note: When ganging an even number of small controls, use backboxes with tapped ears. Do not use plaster rings or gangbox covers.




- Fins broken wallplates (FB)** (derating required)  
 • for Vareo® and Nova T☆® installations

		Number of Small Controls						
		0	1	2	3	4	5	6
Number of Large Controls	0	NA	1	2 4.56 in	3 6.32 in	4 8.45 in	5 9.97 in	6 11.85 in
	1	1 4.56 in	3 6.32 in	4 8.14 in	5 9.97 in	6 11.85 in	7 15.5 in	
	2	3 8.20 in	5 9.97 in	6 11.79 in	7 15.5 in			
	3	5 11.85 in	7 15.5 in			For larger wallplate configurations, contact Lutron® Customer Service.		



  

  
 → number of backboxes  
 → wallplate width

**Example: plus sign (1 + 1) two small controls**

The plus sign (1 + 1) indicates the need for additional backboxes connected by a chase nipple or spacer with 3/4 in separation as shown.




Two single-gang backboxes connected by a chase nipple with 3/4 in separation.



→ 3/4 in ←


Use a spacer, chase nipple or Lutron® part# PLUS-ADAPTER® -3.5.



Two small controls mounted on a no fins broken adapter plate (provided with wallplate).



See pgs. B5–B6 for small and large control numbers.



No Fins Broken (NFB) screwless seamless wallplate with no visible hardware NT-SS-NFB-WH.



**Derating Table 1**

**New Architectural** | Verti®

**Designer** | Maestro®, Maestro IR®, Maestro Wireless®, Spacer System®, Diva®, Lyneo® Lx, Skylark Contour™, Skylark®

**Traditional** | Abella®, Ceano®, Ariadni®, Glyder®, Rotary



**No fins broken**



**1 fin broken**



**2 fins broken**

	No fins broken	1 fin broken	2 fins broken
<b>Incandescent</b>			
Dimmers	600W	500W	400W
	1000W	800W	650W
Dual dimmers	300W	250W	200W
	300W	250W	200W
<b>Magnetic low-voltage</b>			
Dimmers	600VA/450W	500VA/400W	400VA/300W
	1000VA/800W	800VA/650W	650VA/500W
<b>Electronic low-voltage</b>			
Dimmers	300W	250W	200W
	500W	450W	400W
	600W	500W	400W
<b>Fluorescent</b>			
<b>Hi-lume®/Hi-lume® Compact SE/Eco-10®/EcoSystem®</b>			
Verti	60 ballasts/6A	50 ballasts/5A	35 ballasts/3.5A
Maestro/Spacer System	20 ballasts/6A	20 ballasts/5A	20 ballasts/3.5A
Diva, Skylark, Lyneo Lx and Ariadni	no derating	no derating	no derating
Tu-Wire®: Spacer System, Diva, Skylark	5A	4A	3.3A
<b>Fan controls</b>			
Quiet 7-speed	1.0A/300W	1.0A/300W	1.0A/300W
Quiet 3-speed	1.5A	1.5A	1.5A
Fully variable	5A	4A	3A
<b>Fan/light controls</b>			
Quiet 7-speed	1.0A/300W	1.0A/300W	1.0A/300W
Quiet 3-speed	1.5A/300W	1.5A/300W	1.5A/300W
	1.5A/360W	1.5A/360W	1.5A/360W
Fully variable	2.5A/300W	2.1A/250W	1.7A/200W
<b>Electronic switches</b>			
Verti	6A/3A	5A/3A	3.5A/3A
Maestro (light/fan)	8A/3A	6.5A/3A	5A/3A
Abella (light/fan)	6A/3A	5A/3A	3.5A/3A

**Derating Table 2**

Architectural | Vareo®, Nova T☆®



**No fins broken**



**1 fin broken**



**2 fins broken**

	No fins broken	1 fin broken	2 fins broken
<b>Incandescent</b>			
Dimmers	600W	500W	300W
	1000W	900W	700W
	1500W	1250W	1000W
	1950W	–	–
<b>Magnetic low-voltage</b>			
Dimmers	600 VA/450 W	500 VA/400 W	300 VA/250 W
	1000 VA/800 W	900 VA/750 W	700 VA/500 W
	1500 VA/1200 W	1250 VA/1000 W	1000 VA/800 W
<b>Electronic low-voltage</b>			
Dimmers	300W	300W	250W
	600W	500W	400W
<b>Fluorescent</b>			
<b>Hi-lume®/Hi-lume® Compact SE/Eco-10®/EcoSystem®</b>			
Vareo	20 ballasts /8 A	20 ballasts /6 A	20 ballasts /4.5 A
Nova T☆	6 A	no derating	no derating
	8 A	no derating	no derating
	16 A	no derating	no derating
0-10VDC control <sup>1</sup>	30mA ballasts	no derating	no derating
Tu-Wire®	5 A	4 A	3.3 A
<b>Fan controls</b>			
Quiet 3-speed	1.5 A	no derating	no derating
Fully variable	6 A	4.2 A	2.5 A
Fully variable	12 A	10 A	8.3 A
<b>Electronic tapswitches<sup>2</sup></b>			
VETS-1000-	1000W	800W	650W
VETS-1000-SL-	1000W	900W	700W
VETN-1000-	1000 VA	700 VA	550 VA

For further information on ganging Nova®, visit [www.lutron.com/customganging](http://www.lutron.com/customganging).

<sup>1</sup>PowerPack required for line voltage switching.

<sup>2</sup>VETS-R-Auxiliary electronic tapswitches do not require derating.

**Derating Table 3**

Architectural | Nova®



No fins broken



1 fin broken



2 fins broken

	No fins broken	1 fin broken	2 fins broken
<b>Incandescent<sup>1</sup></b>			
Dimmers	600W	600W	600W
	1000W	900W	700W
	1500W	1250W	1000W
	2000W	1800W	1500W
<b>Magnetic low-voltage<sup>1</sup></b>			
Dimmers	600 VA/450 W	600 VA/450 W	500 VA/400 W
	1000 VA/800 W	900 VA/750 W	700 VA/500 W
	1500 VA/1200 W	1250 VA/1000 W	1000 VA/800 W
	2000 VA/1600 W	1800 VA/1500 W	1500 VA/1200 W
<b>Electronic low-voltage</b>			
Dimmers	450W	400W	350W
<b>Fluorescent</b>			
Hi-lume®/Hi-lume® Compact SE/Eco-10®/EcoSystem®			
Nova	16A	no derating	no derating
	8A	no derating	no derating
	6A	no derating	no derating
0-10VDC control	60 ballasts/16A	no derating	no derating
Tu-Wire®	5A	4A	3.3A
<b>Fan controls</b>			
Fully variable	6A	5.5A	5A
	12A	11A	10A

Controls must have side sections removed to gang if using VWP wallplates.

<sup>1</sup>Recommended 40W minimum load.

COPY FOR EACH USE

## Multi-gang Worksheet (1-6 Gang Installation)

For use with Vareo®, NovaT<sup>☆</sup>® and Nova®  
 Outline wallplate gang size below with a marker (cross out the rest)

Wallplate Thickness:  Thin Profile Vareo®/NovaT<sup>☆</sup>® **or**  Heavy Duty Nova®

Wallplate Width:  FB (Fins Broken) **or**  NFB (No Fins Broken)

	Position 1	Position 2	Position 3	Position 4	Position 5	Position 6
Load Type						
Load Size W/A/A						
Number of Fins Removed						
Control Model Number						
Full Rating (No Fins Broken)						
Derated Capacity (Fins Broken)						
Small or Large Control						
Wallplate Insert Code						
Interface (if needed)						

Wallplate Model #: \_\_\_\_\_

Wallplate Color: \_\_\_\_\_

Customization:  Engraving  Custom Color  Silk Screen

Backbox Configurations: \_\_\_\_\_

**Vertical Installations**

4.5" Required

**Mixing Small and Large Controls**

Group large controls together on one end of the wallplate. Do not alternate large and small controls.

Correct:  Lg  Sm  Lg  Sm

Incorrect:  Lg  Sm  Lg  Sm

<b>LUTRON</b> Coopersburg, PA 18036 Phone: 1.888.LUTRON1	Project Name: _____ Room: _____ Control Address #: _____ P.O. #: _____	Page: _____ Quantity: _____ Lutron Order #: _____ Lutron Job #: _____
--	---	--

For additional information use the Wallplate Selector tool located on the Lutron® website at [www.lutron.com/lutron/wallplate](http://www.lutron.com/lutron/wallplate).