




<b>R-2S110-TP</b>	
Brand Name	MARK III
Ballast Type	Magnetic
Starting Method	Rapid Start
Lamp Connection	Series
Input Voltage	120
Input Frequency	60 HZ
Status	Active

### Electrical Specifications

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (°F/C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	MAX THD %	Power Factor	Lamp Current Crest Factor	B.E.F.
* F72T12/HO	2	85	-20/-29	1.60	193	0.95	15	0.98	1.8	0.49
F96T12/HO	2	110	-20/-29	2.00	237	0.95	15	0.99	1.7	0.40
F96T12/HO/ES	2	95	60/16	1.70	203	0.91	20	0.98	1.8	0.45

### Wiring Diagram

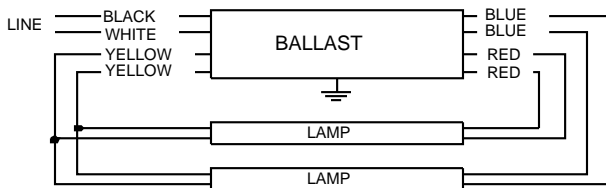


Diag. 21

The wiring diagram that appears above is for the lamp type denoted by the asterisk (\*)

### Standard Lead Length (inches)

	in.	cm.		in.	cm.
Black	22		Yellow/Blue		
White	22		Blue/White		
Blue	46		Brown		
Red	46		Orange		
Yellow	70		Orange/Black		
Gray			Black/White		
Violet			Red/White		

### Enclosure

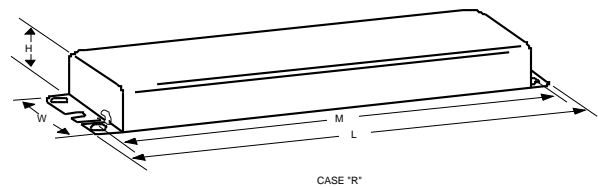

### Enclosure Dimensions

OverAll (L)	Width (W)	Height (H)	Mounting (M)
11.75 "	3.1875 "	2.625 "	11.14062 "
11 3/4	3 3/16	2 5/8	11 9/64
29.8 cm	8.1 cm	6.7 cm	28.3 cm

Revised 07/01/1999



Data is based upon tests performed by Advance Transformer in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

### ADVANCE

O'HARE INTERNATIONAL CENTER · 10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018  
 Customer Support/Technical Service: Phone: 800-372-3331 · Fax: 630-307-3071  
 Corporate Offices: Phone: 800-322-2086