



RGS Series

6, 12 and 24V



10-year life expectancy, maintenance-free emergency lighting units.

The **RGS Series** battery units combine long-life expectancy, high performance design and a reasonable initial cost outlay. Ideally suited for a range of commercial applications, the long-life lead acid battery is specifically recommended for environments where the unit will be exposed to large variances in ambient temperature.

FEATURES


- Rugged steel cabinet with corrosion-resistant undercoating
- Removable front panel on cabinet provides easy access and allows the unit to be mounted at ceiling height
- Solid-state pulse-type charger – current-limited, temperature-compensated, short-circuit proof and reverse-polarity protected.
- Unit comes standard with electronic lockout and brownout circuits
- Sealed dust-proof transfer relay, test switch and LED indicator lights
- Long-life, maintenance-free Lead-Acid battery
- Standard 120/347VAC input voltage with line cord kit
- Auto-testing capabilities (specific load requirements)
- Meets exceeds CSA C22.2 No. 141-15

See warranty details at: www.tnb.ca/en/brands/lumacell

CABINET	DIMENSIONS			
	A	B	C	D
A	13-1/4" (33.7 cm)	3-5/8" (9.2 cm)	10-1/2" (26.7 cm)	14-1/4" (36.2 cm)
B	16-1/8" (40.9 cm)	5-1/2" (13.9 cm)	10-1/4" (26.0 cm)	13-7/8" (35.2 cm)
C	23-1/8" (58.7 cm)	5-1/2" (13.9 cm)	10-1/4" (26.0 cm)	13-7/8" (35.2 cm)

DIMENSIONS

Dimensions are approximate and subject to change.

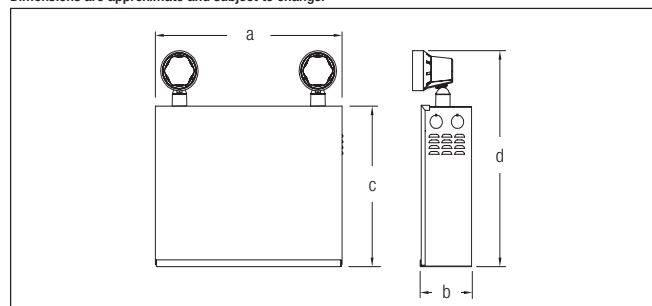

TYPICAL SPECIFICATIONS

Supply and install a complete emergency lighting system as described herein and shown on the drawings.

The **Lumacell® Smart Diagnostic** micro-controller board shall supply the rated load for a minimum of a 1/2 hour to 87.5% of the rated battery voltage. The unit shall be rated 120V or 347V, 60 Hz and be CSA listed. The unit shall have an output of: _____V and _____W.

The charger shall be fully computer tested and its charge voltage factory set to $\pm 1\%$ tolerance. Chargers with field-adjusted potentiometers are not acceptable. A pulse-type charger shall be employed to promote long battery life and reduce the potential for grid corrosion. The charger shall provide a continuous high charge to recharge the battery, when the battery is at full capacity, the charger will shut-off.

Periodically the charger shall provide a pulse of energy to keep the battery topped off. The pulse charger shall be precisely regulated and shall charge the battery in relation to its temperature, state or charge and input voltage fluctuations. The charger shall be current limited, temperature compensated, short-circuit proof and reverse polarity protected.

The unit shall be furnished with an electronic lockout circuit, which will connect the battery when the AC circuit is activated, and an electronic brownout circuit, which will activate the emergency lights when utility power dips below 75% of nominal voltage. A low voltage battery protection circuit shall be provided and will disconnect the load when the battery reaches the end of discharge. The unit shall self-test for 1 minute every 30 days, 10 minutes on the 6th month and 30 minutes every 12 months. The unit shall be capable of full recharge in compliance with CSA specifications. The unit shall be furnished with sealed dust tight relay, a test switch and diagnostic LED indicator lights to continuously monitor the status of the unit: Battery Failure, Battery Disconnected, Charger Failure, Lamp Failure, Service Alarm, AC "ON", Charger High Rate. The emergency lighting heads shall require no tools for orientation.

The unit shall be CSA 22.2 No.141-15 certified.

The unit shall be **Lumacell®** model: _____.

WIRE GUARDS

460.0078-L	Wall Mount	"A" Cabinet
460.0081-L	Wall Mount	"B" Cabinet
460.0034-L	Wall Mount	"C" Cabinet

REPLACEMENT LAMPS

ORDERING CODE	LAMP TYPE	VOLTAGE/WATTAGE
580.0097-L	MR16 LED	6V-4W
580.0122-L	MR16 LED	6V-5W
580.0093-L	MR16 LED	12V-4W
580.0104-L	MR16 LED	12V-5W
580.0106-L	MR16 LED	12V-6W
580.0098-L	MR16 LED	24V-4W
580.0100-L	MR16 LED	24V-6W



RGS Series

6, 12 and 24V

POWER CONSUMPTION AND UNIT RATING

MODEL	AC SPECS	WATTAGE CAPACITY				
		30 MIN	1H00	1H30	2H00	4H00
RGS36	120/347VAC	36	21	15	12	6
RGS72		72	42	30	24	12
RGS108		108	63	45	36	18
RGS180		180	105	75	60	30
RG12S36		36	21	15	12	6
RG12S72		72	42	30	24	12
RG12S100		100	58	42	33	17
RG12S144		144	84	60	48	24
RG12S200		200	117	83	67	33
RG12S250		250	144	100	83	42
RG12S360		360	200	144	108	60
RG24S144		144	84	60	48	24
RG24S200		200	117	83	67	33
RG24S288		288	168	120	96	48
RG24S350		350	200	144	120	60
RG24S432		432	250	180	144	72
RG24S550		550	320	230	180	90
RG24S720		720	420	300	240	120

Note: Units provide higher power for minimum one hour of emergency lighting.

ORDERING INFORMATION

SERIES	CAPACITY & CABINET SIZE ¹	# OF HEADS	HEAD STYLE/WATTAGE	COLOUR	AC VOLTAGE	OPTIONS
RGS= 6V	36= 36W (A) 72= 72W (A) 108= 108W (A) 180= 180W (B)	Blank= no heads 1= one head 2= two heads 3= three heads	LD1= MR16 LED, 6V-4W LD2= MR16 LED, 6V-5W LD7= MR16 LED, 12V-4W LD9= MR16 LED, 12V-5W LD10= MR16 LED, 12V-6W LD13= MR16 LED, 24V-4W LD14= MR16 LED, 24V-6W	Blank= factory white BK= black	Blank= 120/347VAC input ZC= 277VAC input	A= ammeter AT= auto-test ¹ ATN= auto-test, non-audible ¹ CPS3= constant power supply 3Amps, 24V only ² CT= cab-tire LD= lamp disconnect LTS= light activated test switch NEX= NEXUS [®] system interface ³ NEXRF= wireless NEXUS [®] system interface ³ RF3= radio frequency interference filter, 347VAC RFI= radio frequency interference filter, 120VAC TD= time delay (programmable) TL= cord and twist lock plug (120V only) ⁴ TMBB= AC/DC terminal block TMDB= DC terminal block TMBK= AC terminal block V= voltmeter VSR= voltage sensing relay ⁵ ¹ Not available with 6V-108W Minimum lamp load required: 20% of unit capacity. ² "C" Cabinet only 24V, 144W-720W. ³ Not all options are available with NEXUS [®] system. Consult your sales representative. ⁴ 120V is standard ⁵ See voltage sensing relay in options section. B & C cabinet only.
RG12S= 12V	36= 36W (A) 72= 72W (A) 100= 100W (A) 144= 144W (A) 200= 200W (B) 250= 250W (B) 360= 360W (B)					
RG24S= 24V	144= 144W (A) 200= 200W (B) 288= 288W (B) 350= 350W (C) 432= 432W (C) 550= 550W (C) 720= 720W (C)					

EXAMPLE: RGS362MLD2