

# Incandescent Lamp Changers

## Rubber Covered Fingers with Garter Springs

### Features

- Rubber covered fingers with garter springs make changing a variety of lamp types simple.
- Hard-to-reach lamps are easily replaced without using ladders or platforms.
- A variety of styles and sizes is available to fit practically all commonly used lamps.
- Models for use with incandescent, mercury, metal halide, and sodium lamps.
- Garter spring grips lamps firmly.
- Lightweight for ease-of-use and convenience.
- Insulated to help protect against shock.
- Changes lamps up to 25'7.6 m height (poles sold separately).



151-CA



153-C




161-C

	Lamp Size ❶	Wattage	Catalog Number
Changer head with angle adjustment ❷	A-15, -17, -19; G-16-1/2, -18-1/2	15-100	150-CA
Changer head with angle adjustment ❷	A-19, -21, -23; P-25; PS-25, -30, -35; FLE-20/T-19 ❸; SL-18 ❸; G-25, -30	25-500 (18 fluorescent ❸)	151-CA
Changer head only	PS-35, -40; G-40, -48	25-500	152-C
Changer head only	PS-52; G-48, -64	750-1500 (incandescent)	153-C
Changer head only	T-16, -18, -20	1000-1500 (incandescent) 400-1000 (mercury)	154-C
Changer head only	R-52, -57	500-1000 (incandescent flood) 400-750 (mercury)	155-C
Changer head only	R-30, -40; PAR-30, -36, -38; ER-30, -40	50-500 (incandescent) 100-175 (mercury)	156-C
Changer head only	E-37; BT-37, -46; ED-37	400-700 (mercury) 400-1000 (metal halide)	158-C
Changer head only	R-60	750 (incandescent) 400 (mercury flood)	159-C
Changer head only	E-21, -23, -23-1/2, -25, -28; ED-23-1/2, -28; BT-28	75-250 (mercury) 175-400 (metal halide) 50-1000 (sodium)	161-C
Changer head only	E-17, -18; ED-17, -18; B-17	50 (mercury) 35-400 (sodium) 70-175 (metal halide)	163-C

### Lamp Identification

A lamp designation consists of a letter indicating the shape and a figure to identify the approximate diameter in eighths of an inch. Lamps are measured through their greatest diameter. G-25 lamps are globe shaped with a 3-1/8"/79.5 mm diameter.

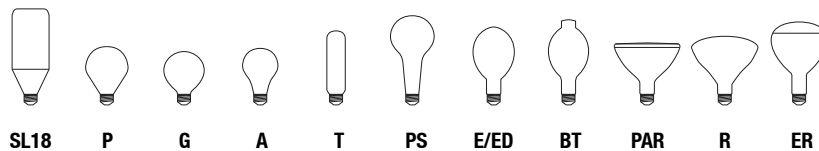

- ❶ Lamp size, not wattage, determines proper changer. May not accommodate weight of greater Wattage lamps.
- ❷ Jointed angle adapter for easy removal of horizontally or angle mounted lamps included. Use with small headed units only.
- ❸ Not for use with angle adapter.