

**LED ELECTRONIC
25W POWER SUPPLY**
by
GM Lighting

Project: _____

Type: _____

Location: _____

Contact Phone: _____

PRODUCT DESCRIPTION

Universal AC input / full range electronic power supply that features short circuit, overload, and over voltage protection. 12VDC output. 88 - 264 VAC input. 47 - 63Hz frequency range at 79% typical efficiency. 2.1 Amps. 25 Watts.




PRODUCT SPECIFICATIONS

Construction: Construction: Sturdy ventilated full metal enclosure for maximum circuit board cooling. No external fusing required. LED indicator for power on. High operating temperature up to 70°C (158°F). Screw terminals.

Electrical: Output voltage 12VDC. 110 - 180% rated output power overload protection. Overload recovers automatically after fault condition is removed. Withstands 300VAC surge input for 5 seconds. Utilizes 105°C (221°F) long life electrolytic capacitors.

Label: UL recognized.

Not rated for outdoor use.

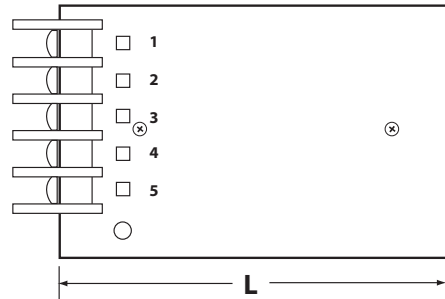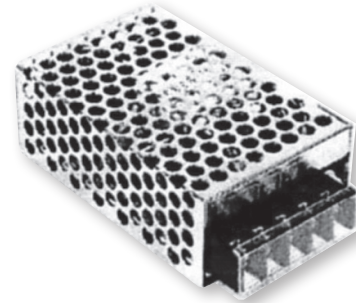

Catalog Number	Max. Wattage	Input Voltage	Output Voltage	Weight	Dimensions		
					L	W	H
LTH-2	25W	120V	12 VDC	6.9 oz.	3-3/16"	2"	1-1/8"

NOTE: For 12V Voltage Drop - Please see our website



GM Lighting, LLC • 9830 W. 190th St. • Unit F • Mokena, IL 60448
Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • www.gmlighting.net
e-mail: gmlightingllc@sbcglobal.net • Specifications subject to change without notice. LTH2_103013

