



RGS BATTERY Units

6, 12 and 24 volts

PROJECT _____
 LOCATION _____
 DATE _____
 CONTRACTOR _____
 PREPARED BY _____
LUMACELL
 MODEL _____

RGS SERIES

10-year life expectancy, maintenance-free emergency lighting units.


The RGS Series battery units combine long-life expectancy, high performance design and a reasonable initial cost outlay. Ideally suited for a range of commercial applications, the long-life lead acid battery is specifically recommended for environments where the unit will be exposed to large variances in ambient temperature.

FEATURES

- Rugged steel cabinet with corrosion-resistant undercoating – standard colour is factory white. Polar white and black are also optional
- Removable front panel on cabinet provides easy access and allows the unit to be mounted at ceiling height
- Solid-state pulse-type charger – current-limited, temperature-compensated, short-circuit proof and reverse-polarity protected.
- Unit comes standard with electronic lockout and brownout circuits
- Sealed dust-proof transfer relay, test switch and LED indicator lights
- Long-life, maintenance-free lead acid battery
- Wide range of lampheads available – consult Ordering Information for complete list
- Standard 120/347Vac input voltage with line cord kit
- NEXUS® compatible (for more information on NEXUS®, please consult your sales representative)
- CSA C22.2 No. 141 certified

CABINET	DIMENSIONS				
	A	B	C	D	E
A	13 1/4" (33.7 cm)	3 5/8" (9.2 cm)	10 1/2" (26.7 cm)	14 1/4" (36.2 cm)	16 1/2" (41.9 cm)
B	16 1/8" (40.9 cm)	5 1/2" (13.9 cm)	10 1/4" (26.0 cm)	13 7/8" (35.2 cm)	16 1/8" (41.0 cm)
C	23 1/8" (58.7 cm)	5 1/2" (13.9 cm)	10 1/4" (26.0 cm)	13 7/8" (35.2 cm)	16 1/8" (41.0 cm)

DIMENSIONS

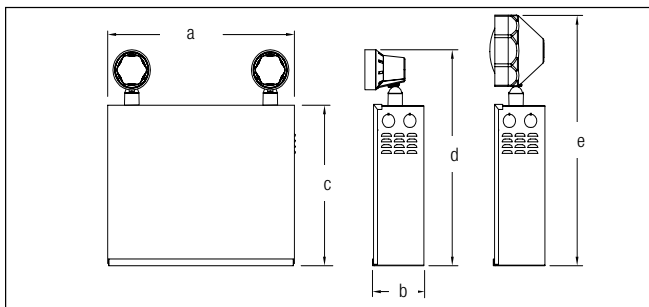

TYPICAL SPECIFICATIONS

Supply and install a complete emergency lighting system as described herein and shown on the drawings.

The **Lumacell Smart Diagnostic** micro-controller board shall supply the rated load for a minimum of a 1/2 hour to 87.5% of the rated battery voltage. The unit shall be rated 120V or 347V, 60 Hz and be CSA listed. The unit shall have an output of: _____volts and _____watts.

The charger shall be fully computer tested and its charge voltage factory set to ± 1% tolerance. Chargers with field-adjusted potentiometers are not acceptable. A pulse-type charger shall be employed to promote long battery life and reduce the potential for grid corrosion. The charger shall provide a continuous high charge to recharge the battery, when the battery is at full capacity, the charger will shut-off.

Periodically the charger shall provide a pulse of energy to keep the battery topped off. The pulse charger shall be precisely regulated and shall charge the battery in relation to its temperature, state or charge and input voltage fluctuations. The charger shall be current limited, temperature compensated, short-circuit proof and reverse polarity protected.

The unit shall be furnished with an electronic lockout circuit, which will connect the battery when the AC circuit is activated, and an electronic brownout circuit, which will activate the emergency lights when utility power dips below 75% of nominal voltage. A low voltage battery protection circuit shall be provided and will disconnect the load when the battery reaches the end of discharge. The unit shall self-test for 1 minute every 30 days, 10 minutes on the 6th month and 30 minutes every 12 months. The unit shall be capable of full recharge in compliance with CSA specifications. The unit shall be furnished with sealed dust tight relay, a test switch and diagnostic LED indicator lights to continuously monitor the status of the unit: Battery Failure, Battery Disconnected, Charger Failure, Lamp Failure, Service Alarm, AC "ON", Charger High Rate. The emergency lighting heads shall require no tools for orientation.

The unit shall be Lumacell model: _____.

REPLACEMENT LAMPS

ORDERING CODE	LAMP TYPE	VOLTAGE/WATTAGE
570.0016-L	Mini tungsten (MT9W)	6V - 9W
570.0025-L	Mini tungsten (MT9W)	12V - 9W
570.0045-L	Mini tungsten (MT9W)	24V - 9W


For the complete list, please see the lamp chart on page 196 to 199

WIRE GUARDS

460.0078-L	Wall Mount	"A" Cabinet
460.0081-L	Wall Mount	"B" Cabinet
460.0034-L	Wall Mount	"C" Cabinet



**SINGLE,
REGULAR
HEAD**



**SINGLE,
METAL
HEAD**



nexus

RGS BATTERY Units

6, 12 and 24 volts



RGS SERIES

POWER CONSUMPTION AND UNIT RATING

MODEL	AC SPECS	WATTAGE CAPACITY					
		30 MIN	1H00	1H30	2H00	4H00	
RGS36	120/347 Vac	0.10/0.04 Amp	36	21	15	12	6
RGS72		0.22/0.08 Amp	72	42	30	24	12
RGS108		0.22/0.08 Amp	108	63	45	36	18
RGS180		0.22/0.08 Amp	180	105	75	60	30
RG12S36		0.09/0.03 Amp	36	21	15	12	6
RG12S72		0.15/0.06 Amp	72	42	30	24	12
RG12S100		0.34/0.12 Amp	100	58	42	33	17
RG12S144		0.40/0.14 Amp	144	84	60	48	24
RG12S200		0.41/0.14 Amp	200	117	83	67	33
RG12S220		0.41/0.14 Amp	220	120	90	72	36
RG12S250		0.41/0.14 Amp	250	144	100	83	42
RG12S360		0.43/0.15 Amp	360	210	150	120	60
RG12S360HP		0.43/0.15 Amp	360	210	150	120	60
RG24S144		0.55/0.20 Amp	144	84	60	48	24
RG24S200		0.67/0.23 Amp	200	117	83	67	33
RG24S288		0.67/0.23 Amp	288	168	120	96	48
RG24S350		0.67/0.23 Amp	350	200	144	120	60
RG24S432		0.67/0.23 Amp	432	250	180	144	72
RG24S550		0.88/0.33 Amp	550	320	230	180	90
RG24S720		0.88/0.33 Amp	720	420	300	240	120
RG24S720HP		0.88/0.33 Amp	720	420	300	240	120

ORDERING INFORMATION

SERIES	CAPACITY	# OF HEADS	HEADS STYLE/WATTAGE	COLOUR	AC VOLTAGE	OPTIONS
RGS= 6 volts	36= 36 watts (A)*	Blank= no head 1= one head 2= two heads 3= three heads	LD1= 6V-4W, MR16 LED	Blank= factory white BK= black	Blank= 120/347Vac input ZB= 240 Vac input ZC= 277 Vac input ZE= 220 Vac, 50 Hz input	Blank= no options A= ammeter AT= auto-test ATN= auto-test non-audible CT= cabtire DPF6= 6cct. fuse panel LD= lamp disconnect LTS= light activated test switch RRT= remote test receiver TD= time delay (programmable) TL= twistlock plug TMBB= AC/DC terminal block TMBD= DC terminal block TMBK= AC terminal block V= voltmeter HHC= remote test transmitter (one per order) HP= high power *NEX= NEXUS® system interface *NEXRF= wireless NEXUS® system interface
	72= 72 watts (A)*		LD7= 12-4W, MR16 LED			
	108= 108 watts (A)* 180= 180 watts (B)*		MT9W= mini-tungsten, 6V, 12V, 24V, 9W, wedge base MT18W= mini-tungsten, 12V, 24V, 18W, wedge base MQ8W= mini-halogen, 6V, 12V, 8W, quartz bi-pin MQ12W= mini-halogen, 6V, 12V, 24V, 12W, quartz bi-pin MQM6W= mini-halogen, 6V, 6W, MR16 MQM10W= mini-halogen, 6V, 10W, MR16 MQM12W= mini-halogen, 12V, 24V, 12W, MR16 MQM20W= mini-halogen, 12V, 20W, MR16 LH9W= tungsten, 6V, 12V, 24V, 9W, wedge base LH18W= tungsten, 12V, 24V, 18W, wedge base LH25W= tungsten, 6V, 12V, 24V, 25W, DCB LHQ8W= halogen, 6V, 12V, 8W, quartz bi-pin LHQ12W= halogen, 6V, 12V, 12W, quartz bi-pin LHQ20W= halogen, 6V, 12V, 24V, 20W, quartz bi-pin LHQ55W= halogen, 12V, 55W*, quartz bi-pin LHQ70W= halogen, 24V, 70W**, quartz bi-pin SB9W= tungsten, 6V, 9W, sealed beam SB12W= tungsten, 12V, 12W, sealed beam SB18W= tungsten, 6V, 12V, 18W, sealed beam SB25W= tungsten, 6V, 12V, 25W, sealed beam QSB8W= halogen, 6V, 12V, 8W, quartz sealed beam QSB12W= halogen, 6V, 12V, 12W, quartz sealed beam QSB20W= halogen, 6V, 20W, quartz sealed beam			
RG12S= 12 volts	36= 36 watts (A)* 72= 72 watts (A)* 100= 100 watts (A)* 144= 144 watts (A)* 200= 200 watts (B)* 220= 220 watts (B)* 250= 250 watts (B)* 360= 360 watts (B)*					
RG24S= 24 volts	144= 144 watts (A)* 200= 200 watts (B)* 288= 288 watts (B)* 350= 350 watts (C)* 432= 432 watts (C)* 550= 550 watts (C)* 720= 720 watts (C)*					
	* Cabinet size is not part of the ordering information.		* Aluminum heads only. ** High temperature heads only.			* Consult your sales representative for options available with NEXUS® system.

EXAMPLE: RGS362MT9W