

Non-Metallic and Plated Steel 4x4 Boxes


For retrofit construction. Screw hole patterns for 4x4 and 2-gang devices. Available in non-metallic (black and red plastic) and plated steel versions.

FEATURES AND BENEFITS

- Non-metallic and steel versions in red are ideal for installations of fire alarms or signaling devices
- 1/2" and 3/4" knockouts
- Spring clip holds box securely against wall when screws are tightened
- Weight rating: 6 lbs for walls; 10 lbs for ceilings
- Non-metallic boxes include (2) NM94 cable connectors
- †2-hour fire rating




FSR404BL



FSR404RD



FSR404S




FSR404SRD




FSR404SD

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION/ ATTACHMENT	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
FSR404BL†	00596	Plastic 4x4 Box, Black	25	25	4.250	4.185	2.796
FSR404RD†	00598	Plastic 4x4 Box, Red	25	25	4.250	4.185	2.796
FSR404S*	00597	Steel 4x4 Box, Plated	25	25	4.250	4.185	2.815
FSR404SRD*	00599	Steel 4x4 Box, Red	25	25	4.250	4.185	2.815
FSR404SD*	00600	Steel 4x4 Box Divider	25	25	3.581	0.141	2.750


*CSA listed.
† 2-Hour Fire Rating
PATENTED.

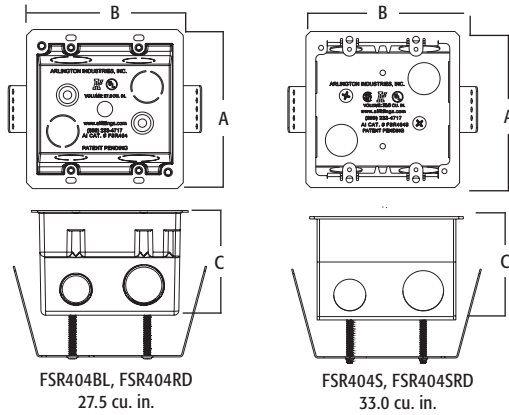

For wall thicknesses up to 1-1/4"—field modify bracket for thicknesses greater than 1-1/4".




Typical Installation of Low Voltage Fire Alarm Box using Red 4x4 Box

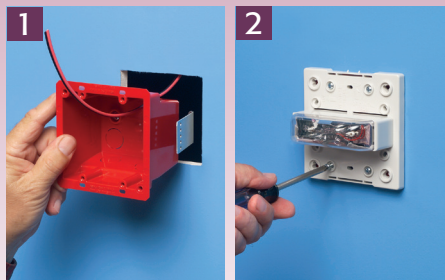

1 Determine position of device. Cut hole. Pull wire(s) through appropriate knockout (connector). Install box in opening. FSR404RD shown.

2 Install fire alarm (or other device) through the screw holes in the box.

Typical Installation of Device using Steel or Black Plastic 4x4 Box

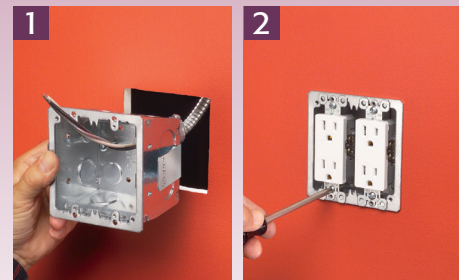

1 Determine position of device. Cut hole. Pull wire(s) through appropriate knockout (connector). Install box in opening. FSR404S shown.

2 Install devices through the screw holes in the box.