

D850 Digital Multi-Channel Amplifier

4 Zone 8 Channel 50 Watt



More power, more efficient, more robust...just more. For nearly 50 years Russound has been designing equipment to fit an installer's needs. When we went to redesign the next generation of our ubiquitous multi-channel amplifier line, we approached it from the ground-up. The result is the D-Series, a completely custom-built solution that has all the great features of historically popular multi-channel amps in a much more refined platform.

The Russound D850 digital multi-channel amplifier offers the features custom installation professionals demand while offering a lighter weight, smaller chassis and more efficient Class D power. The feature-rich design of the D850 is ideal for the demands of distributed audio systems and is also compatible with our Russound volume controls. Its 8 channels are arranged in stereo pairs to provide discreet amplification and custom configurations for each of 4 zones.

Sound Quality

The D-Series amplifiers all have the same legendary Russound sound quality and installer-friendly features customers have


come to expect. Ultra-low distortion output (relatively unheard of in other multi-zone amplifiers) allows for clean, undistorted audio even at high listening volumes. A robust protection circuit provides efficient, safe and reliable operation under extreme conditions and protects each amplifier output channel.

Home Theater

The D-Series amps are even up to the rigorous demands of home theater applications, easily transforming into a powerful 160 watt X 4 channel monster (in bridged mode). You can also choose to individually un-bridge pairs for lower power applications such as Dolby Atmos® or surround speakers. As an example you could run a 5.1 system at 3 channels @ 160W and 2 channels @ 50W. That's Russound versatility!

Say "no" to the hum

Advanced triggering options allow the amps to operate on demand. Apart from the obvious energy efficiency, there is no amplifier hum on your speakers when the system isn't in use.

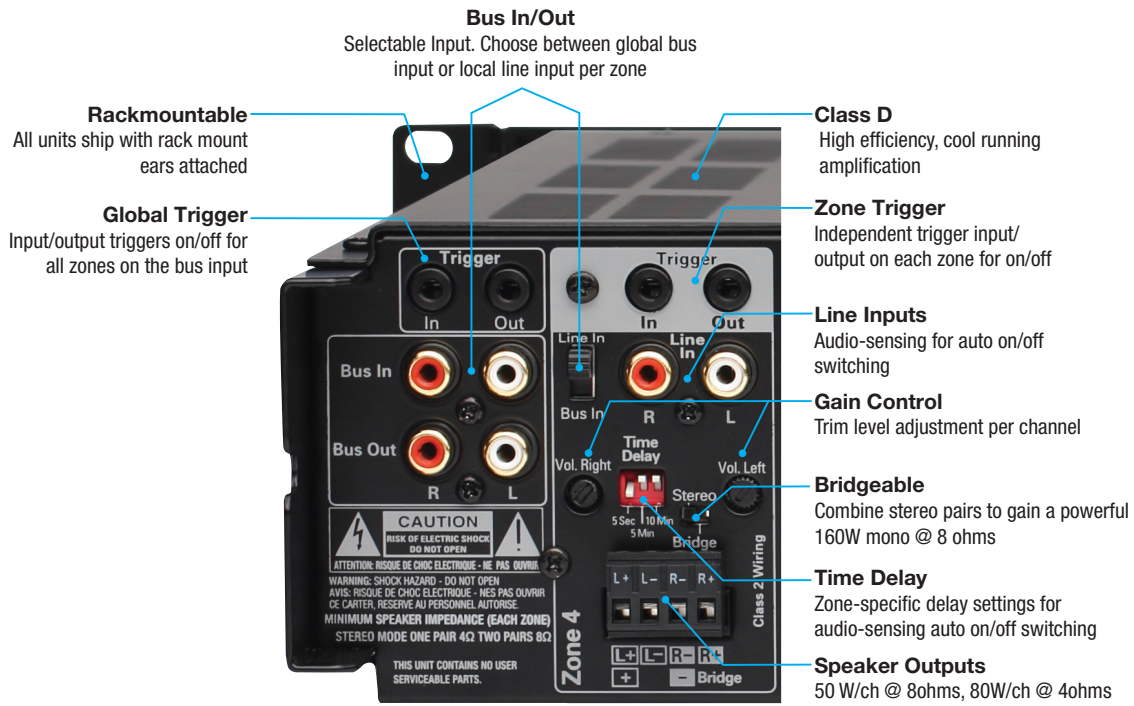

Technical Specifications

Power Output	80W /Channel, 1kHz into 4 Ohms, 50W /Channel, 1kHz into 8 Ohms. Bridged: 160W, 1kHz into 8 Ohms
Amplified Channels	8 channels, 4 independent zones
Signal-to-Noise Ratio	>90dB A-weighted
Frequency Response	20Hz to 20kHz +1.7/-1dB at 1W output into 8 Ohms
Minimum Impedance	Stereo Mode 4 Ohms, Bridge Mode 8 Ohms
Input Sensitivity	600 mV for 80W @ 1 KHz 4 Ohm One Zone, 700 mV for 50W @ 1 KHz 8 Ohm One Zone
Input Impedance	>22k Ohms Line Input
Trigger Inputs/outputs	Bus In /Out. Each Zone In/Out 12VDC 100mA
Zone Line Input	Line or Bus select switch per zone
Bridge Mode	Select Stereo or Bridge mode per zone 8 Ohm only
Speaker Connectors	Detachable speaker terminals support up to 14awg wire
Switching Delay	Three settings, 5 Seconds, 5 minutes, 10 minutes
Power Requirements	North American Model D850: 100-120VAC 60Hz 600W max, IEC C14 type connector with 3 terminal detachable power cord International Model D850i: 220-240VAC 50Hz 600W max, IEC C14 type connector with 3 terminal detachable power cords for UK, Europe, and Australia
Fuse Rating	100-120V/T5A, 250V US & Canada, 220-230V/T2.5A, 250V Europe
Dimensions	16.81"W x 3.46" H x 16.14"D (42.7 x 8.8 x 41.0 cm)
Weight	19lbs. (8.6kg)

Product Specifications

Model Number	Part Number	Shipping Dimensions	Shipping Weight
D850	2800-536236	22.0"L x 21.0"W x 8.7"H (55.8 x 53.3 x 22.0 cm)	21 lbs (9.5 kg)
D850i	2800-536397	22.0"L x 21.0"W x 8.7"H (55.8 x 53.3 x 22.0 cm)	22 lbs (10 kg)

Russound | 1 Forbes Road Newmarket, NH 03857 | 603.659.5170 | www.russound.com

©2015 Russound/FMP, Inc. All rights reserved. Russound and the Russound logo are registered trademarks of Russound/FMP, Inc. Building Sound Solutions is a trademarks of Russound/FMP, Inc. All other trademarks are the property of their respective owners. Russound reserves the right to change specifications without notice.