


DigiTrace RTD4AL

RTD TEMPERATURE SENSOR

For temperature measurement up to 900°F (482°C)

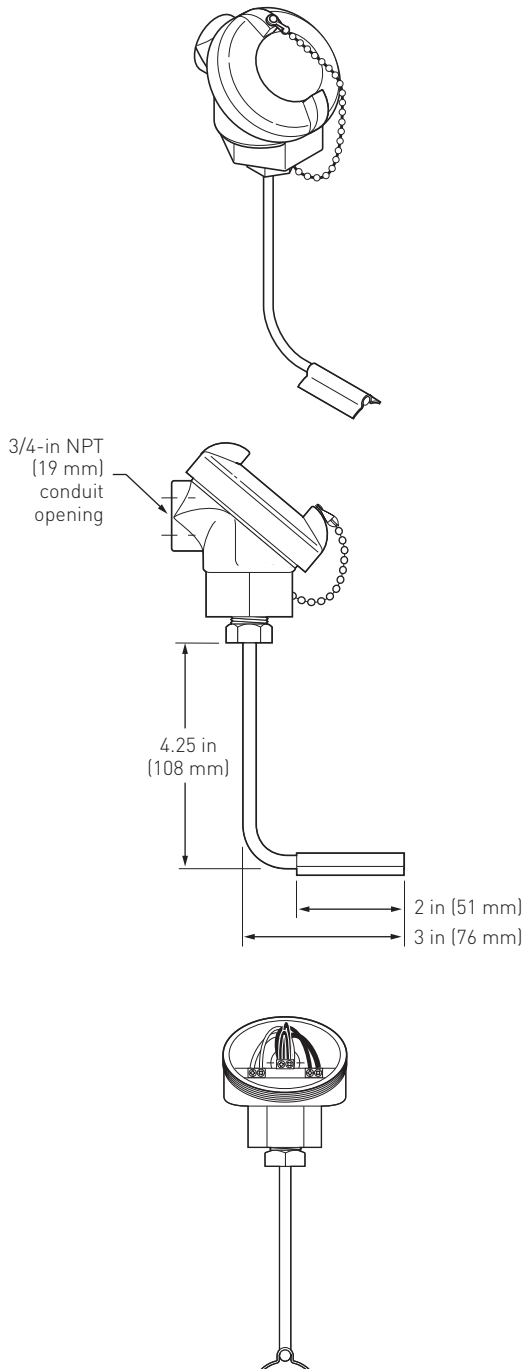

PRODUCT OVERVIEW

The DigiTraceRTD4AL is a three-wire platinum RTD (resistance-temperature detector) typically used with monitoring and control systems that require accurate temperature control. The RTD4AL kit can be used with a wide variety of DigiTrace monitoring and control systems.

SPECIFICATIONS

Sensor housing	Aluminum; NEMA 4X
Sensor sheath	316 stainless steel
Range	-100°F to 900°F (-73°C to 482°C) maximum
Accuracy	±1°F (0.5°C) at 32°F (0°C)
Resistance	100 ohms at 0°C $\alpha = 0.00385$ ohms/ohm/°C
Connection	3/4-in (19 mm) NPT conduit hub
Note: The length of RTD extension wires is determined by the wire gauge used. To reduce the likelihood that electrical noise will affect temperature measurement, keep RTD extension wires as short as possible. Use shielded instrument cable such as DigiTrace MONI-RTD-WIRE (22 AWG, PVC insulation, -30°F to 140°F, -20°C to 60°C) or Belden 83553 (22 AWG, FEP insulation, -95°F to 395°F, -70°C to 200°C).	

ADDITIONAL MATERIALS REQUIRED

Pipe strap, conduit, 16–22 AWG shielded instrument cable

KIT CONTENTS

One RTD temperature sensor

APPROVALS

The RTD4AL is CSA certified to U.S. and Canadian standards.



Class I, Div. 2, Groups A, B, C, D
Class II, Div. 2, Groups F, G



WWW.PENTAIRTHERMAL.COM

NORTH AMERICA

Tel: +1.800.545.6258
Fax: +1.800.527.5703
Tel: +1.650.216.1526
Fax: +1.650.474.7711
thermal.info@pentair.com

EUROPE, MIDDLE EAST, AFRICA

Tel: +32.16.213.511
Fax: +32.16.213.603
thermal.info@pentair.com

ASIA PACIFIC

Tel: +86.21.2412.1688
Fax: +86.21.5426.2917
cn.thermal.info@pentair.com

LATIN AMERICA

Tel: +1.713.868.4800
Fax: +1.713.868.2333
thermal.info@pentair.com

Pentair and DigiTrace are owned by Pentair or its global affiliates. All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

© 2001–2013 Pentair.