## **SIEMENS**

Data sheet 3RB3026-1PE0



Overload relay 1...4 A Electronic For motor protection Size S0, Class 10E Contactor mounting Main circuit: Spring-type terminal Auxiliary circuit: Spring-type terminal Manual-Automatic-Reset

product brand name	SIRIUS	
product designation	solid-state overload relay	
product type designation	3RB3	
General technical data		
size of overload relay	S0	
size of contactor can be combined company-specific	S0	
power loss [W] for rated value of the current at AC in hot operating state	0.1 W	
• per pole	0.03 W	
insulation voltage with degree of pollution 3 at AC rated value	690 V	
surge voltage resistance rated value	6 kV	
maximum permissible voltage for protective separation in networks with grounded star point		
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	300 V	
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	300 V	
<ul> <li>between main and auxiliary circuit</li> </ul>	600 V	
between main and auxiliary circuit	690 V	
shock resistance	15g / 11 ms	
• according to IEC 60068-2-27	15g / 11 ms; Signaling contact 97 / 98 in position "Tripped": 9g / 11 ms	
vibration resistance	1-6 Hz, 15 mm; 6-500 Hz, 20 m/s <sup>2</sup> ; 10 cycles	
thermal current	4 A	
type of protection according to ATEX directive 2014/34/EU	Ex II (2) G [Ex e] [Ex d] [Ex px] ; Ex II (2) D [Ex t] [Ex p]	
certificate of suitability according to ATEX directive 2014/34/EU	PTB 09 ATEX 3001	
reference code according to IEC 81346-2	F	
Substance Prohibitance (Date)	10/01/2009	
SVHC substance name	Bleimonoxid (Bleioxid) - 1317-36-8	
Ambient conditions		
installation altitude at height above sea level maximum	2 000 m	
ambient temperature		
<ul><li>during operation</li></ul>	-25 +60 °C	
during storage	-40 +80 °C	
during transport	-40 +80 °C	
temperature compensation	-25 +60 °C	
relative humidity during operation	10 95 %	
Main circuit		
number of poles for main current circuit	3	
adjustable current response value current of the current- dependent overload release	1 4 A	
operating voltage		
rated value	690 V	
<ul> <li>at AC-3e rated value maximum</li> </ul>	690 V	

operating frequency rated value	50 60 Hz
operating inequality rated value	4 A
operational current at AC-3e at 400 V rated value	4 A
operating power	
• for 3-phase motors at 400 V at 50 Hz	0.37 1.5 kW
• for AC motors at 500 V at 50 Hz	0.37 2.2 kW
• for AC motors at 690 V at 50 Hz	0.55 3 kW
Auxiliary circuit	0.33 3 KVV
	integrated
design of the auxiliary switch number of NC contacts for auxiliary contacts	integrated 1
	for contactor disconnection
• note	1
number of NO contacts for auxiliary contacts	
• note	for message "tripped" 0
number of CO contacts for auxiliary contacts	O
operational current of auxiliary contacts at AC-15  • at 24 V	4 A
	4 A
• at 110 V	
• at 120 V	4 A
• at 125 V	4 A 3 A
• at 230 V	3 A
operational current of auxiliary contacts at DC-13	2.4
• at 24 V	2 A 0.55 A
• at 60 V	0.55 A 0.3 A
• at 110 V	
• at 125 V	0.3 A
• at 220 V	0.11 A
Protective and monitoring functions	01 400 405
trip class	CLASS 10E
design of the overload release	electronic
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	**
at 480 V rated value	4 A
at 600 V rated value	4 A
	D000 / D000
contact rating of auxiliary contacts according to UL	B600 / R300
Short-circuit protection	B600 / R300
Short-circuit protection design of the fuse link	B600 / R300
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit	
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required	gG: 35 A, RK5: 15 A
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required	gG: 35 A, RK5: 15 A gG: 20 A
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required	gG: 35 A, RK5: 15 A
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions	gG: 35 A, RK5: 15 A gG: 20 A fuse gG: 6 A
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position	gG: 35 A, RK5: 15 A gG: 20 A fuse gG: 6 A
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method	gG: 35 A, RK5: 15 A gG: 20 A fuse gG: 6 A  any Contactor mounting
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height	gG: 35 A, RK5: 15 A gG: 20 A fuse gG: 6 A  any Contactor mounting 109 mm
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width	gG: 35 A, RK5: 15 A gG: 20 A fuse gG: 6 A  any Contactor mounting 109 mm 45 mm
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth	gG: 35 A, RK5: 15 A gG: 20 A fuse gG: 6 A  any Contactor mounting 109 mm
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals	gG: 35 A, RK5: 15 A gG: 20 A fuse gG: 6 A  any Contactor mounting 109 mm 45 mm 85 mm
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth	gG: 35 A, RK5: 15 A gG: 20 A fuse gG: 6 A  any Contactor mounting 109 mm 45 mm
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit	gG: 35 A, RK5: 15 A gG: 20 A fuse gG: 6 A  any Contactor mounting 109 mm 45 mm 85 mm
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and	gG: 35 A, RK5: 15 A gG: 20 A fuse gG: 6 A  any Contactor mounting 109 mm 45 mm 85 mm
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection  • for main current circuit	gG: 35 A, RK5: 15 A gG: 20 A fuse gG: 6 A  any Contactor mounting 109 mm 45 mm 85 mm  Yes
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection	gG: 35 A, RK5: 15 A gG: 20 A fuse gG: 6 A  any Contactor mounting 109 mm 45 mm 85 mm
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection  • for main current circuit  • for auxiliary and control circuit  arrangement of electrical connectors for main current	gG: 35 A, RK5: 15 A gG: 20 A fuse gG: 6 A  any Contactor mounting 109 mm 45 mm 85 mm  Yes  spring-loaded terminals spring-loaded terminals
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection  • for main current circuit  • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit	gG: 35 A, RK5: 15 A gG: 20 A fuse gG: 6 A  any Contactor mounting 109 mm 45 mm 85 mm  Yes  spring-loaded terminals spring-loaded terminals
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection  • for main current circuit  • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections for main contacts	gG: 35 A, RK5: 15 A gG: 20 A fuse gG: 6 A  any Contactor mounting 109 mm 45 mm 85 mm  Yes  spring-loaded terminals spring-loaded terminals Top and bottom
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection  • for main current circuit  • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections for main contacts  • solid	gG: 35 A, RK5: 15 A gG: 20 A fuse gG: 6 A  any Contactor mounting 109 mm 45 mm 85 mm  Yes  spring-loaded terminals spring-loaded terminals Top and bottom  1x (1 10 mm²) 1x 10 mm²
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection  • for main current circuit  • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections for main contacts  • solid  • stranded  • solid or stranded	gG: 35 A, RK5: 15 A gG: 20 A fuse gG: 6 A  any Contactor mounting 109 mm 45 mm 85 mm  Yes  spring-loaded terminals spring-loaded terminals Top and bottom  1x (1 10 mm²) 1x 10 mm² 1x (1 10 mm²)
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection  • for main current circuit  • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections for main contacts  • solid  • stranded  • solid or stranded  • finely stranded with core end processing	gG: 35 A, RK5: 15 A gG: 20 A fuse gG: 6 A  any Contactor mounting 109 mm 45 mm 85 mm  Yes  spring-loaded terminals spring-loaded terminals Top and bottom  1x (1 10 mm²) 1x 10 mm² 1x (1 10 mm²) 1x (1 6 mm²)
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection  • for main current circuit  • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections for main contacts  • solid  • stranded  • solid or stranded	gG: 35 A, RK5: 15 A gG: 20 A fuse gG: 6 A  any Contactor mounting 109 mm 45 mm 85 mm  Yes  spring-loaded terminals spring-loaded terminals Top and bottom  1x (1 10 mm²) 1x 10 mm² 1x (1 10 mm²)

<ul> <li>for auxiliary contacts</li> </ul>			
— solid	2x (0.25 1.5 mm²)		
<ul><li>— solid or stranded</li></ul>	2x (0,25 1,5 mm²)		
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.25 1.5 mm²)		
<ul> <li>finely stranded without core end processing</li> </ul>	2x (0.25 1.5 mm²)		
<ul> <li>for AWG cables for auxiliary contacts</li> </ul>	1x (24 16), 2x (24 16)		
design of screwdriver shaft	Diameter 5 to 6 mm		
size of the screwdriver tip	Pozidriv PZ 2		
Safety related data			
protection class IP on the front according to IEC 60529	IP20		
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front		
Communication/ Protocol			
type of voltage supply via input/output link master	No		
Electromagnetic compatibility			
conducted interference			
<ul> <li>due to burst according to IEC 61000-4-4</li> </ul>	2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3		
<ul> <li>due to conductor-earth surge according to IEC 61000-4-5</li> </ul>	2 kV (line to earth) corresponds to degree of severity 3		
<ul> <li>due to conductor-conductor surge according to IEC 61000-4-5</li> </ul>	1 kV (line to line) corresponds to degree of severity 3		
<ul> <li>due to high-frequency radiation according to IEC 61000- 4-6</li> </ul>	10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz		
field-based interference according to IEC 61000-4-3	10 V/m		
electrostatic discharge according to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge		
Display			
display version for switching status	Slide switch		
display version for switching status			
Certificates/ approvals			





Confirmation







For use in hazardous locations

**Declaration of Conformity** 

**Test Certificates** 

Marine / Shipping







Type Test Certificates/Test Report

**Special Test Certific-**<u>ate</u>



Marine / Shipping











Confirmation

other

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB3026-1PE0

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB3026-1PE0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RB3026-1PE0


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RB3026-1PE0/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB3026-1PE0&objecttype=14&gridview=view1

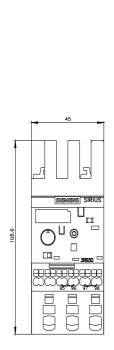

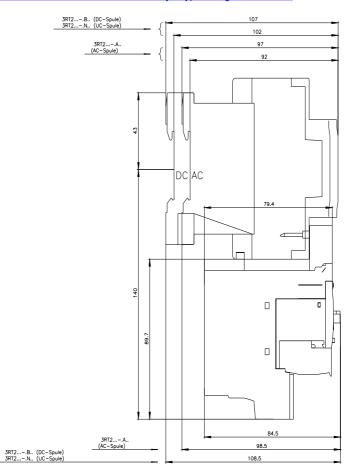

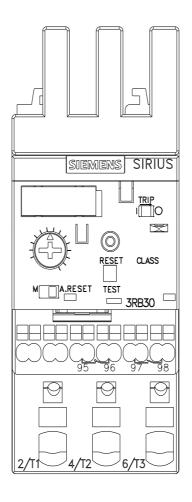

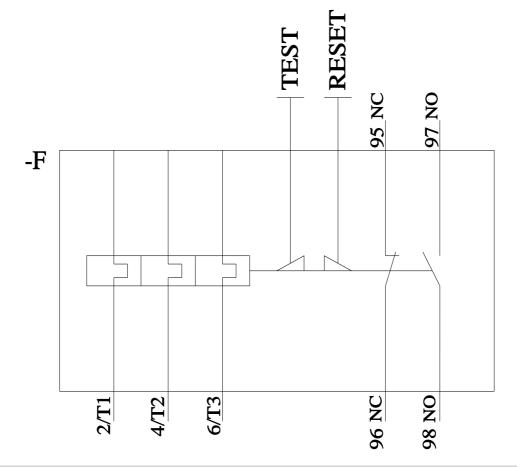

last modified: 9/5/2023 🖸