

# *the* radiant<sup>®</sup> *collection*

---

Smart Plug-In Switch,  
Matter-Enabled with Wi-Fi



# before you start

Review this guide in its entirety. Consult an electrician with any questions or if you are unsure of your abilities.

**Caution:** To reduce the risk of injury and/or overheating and damage to other equipment:

- For dry, indoor use only.
- Connect the Smart Plug-In Switch to a 120 VAC, 60 Hz power source ONLY.
- To reduce the risk of electrical shock, this equipment has a grounding type plug that has a third (grounding) pin. If the plug does not fit in outlet, contact a qualified electrician to install the proper outlet.

## specifications

Load	Rating
Resistive	120 VAC, 60 Hz, 15A
Incandescent/halogen	1000 W
LED/CFL/ELV	600W (5A)
Motor	½ HP


Legrand reserves the right to change specifications without notice.

Visit [www.legrand.us/radiant/smart-lighting/support](http://www.legrand.us/radiant/smart-lighting/support) for support.

# installation & setup

## 1 | plug in the smart plug-in switch

Insert the lamp or device to be controlled into the outlet on the Smart Plug-In Switch.

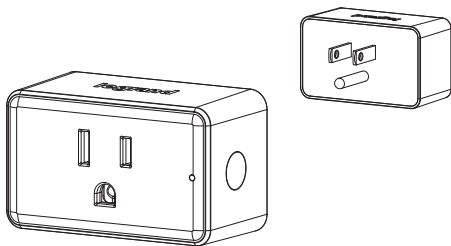

## 2 | test the smart plug-in switch

- A** With the lamp or device on, press the button on the Legrand Smart Plug-In Switch to turn your device on.
- B** Press the button to turn your device off.

### **TROUBLESHOOTING TIP:**

If the device is not responding to the switch, confirm that the outlet is powered and that the device is functional.

## 3 | set up your Matter-compatible plug-in

This product is Matter-certified and designed to be used with a Matter-compliant smart home platform (Amazon Alexa, Google Home, Apple Home, Samsung SmartThings, etc.)

1. A Matter-compliant controller (Home Hub / Admin) and smart home app of the same platform is required for setup.
2. Turn on Bluetooth and connect to a 2.4 GHz Wi-Fi network on your smartphone (5 GHz networks not supported)
3. Open your Matter-complaint smart home app and follow the in-app instructions for adding a Matter device.

### **TROUBLESHOOTING:**

If the plug-in is not appearing during setup or fails during the setup process, confirm that the device is powered and perform the factory reset procedure. Once the device has been reset, restart the setup process in your smart home app.

### **MULTIPLE PLATFORMS:**

If wanting to provide access across multiple smart home platforms, the initial QR code on the device will only work with the first app that was used. To setup in subsequent apps and systems, a new Matter code will need to be generated in the original app the device was setup with.



### **QUICK SETUP TIP:**

For an even faster setup process, open the Camera app on your phone and scan the QR code on the back of the device. This will set the plug device up in your preferred Matter-compatible smart home platform.

# getting to know your plug-in


Item	Name	Description
1	Button	<ul style="list-style-type: none"><li>Turns the device on or off.</li><li>To return the switch to factory default, press and hold the button for 10 seconds.</li></ul>
2	LED Locator Light	<ul style="list-style-type: none"><li>Indicates the current state of the device. Refer to "LED Locator Light Explanations" for detail.</li></ul>
3	Outlet	<ul style="list-style-type: none"><li>Plug your lamp or device into the socket.</li></ul>

## LED LOCATOR LIGHT EXPLANATIONS

LED Color	State of Light	Explanation
	Blinking Green	Factory default; ready to connect to your network.
	Solid Green	Device is connected to your network.

## RESET TO FACTORY DEFAULT

You can reset the device to the factory settings by holding down the power button for 10 seconds until the LED blinks red and green.



# regulatory information

## FCC NOTICE

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesirable operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 cm between the transmitter's radiating structure(s) and the body of the user or nearby persons.

**Note:** Any changes or modifications to this device that are not expressly approved by the manufacturer will void the warranty and the user's authority to operate the equipment.

FCC ID: 2AC7Z-ESPC3MINI1

## IC NOTICE

This device complies with Industry Canada license-exempt RSS standards. Operation is subject to the following two conditions: (1) this device may not cause interference; and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

## RF EXPOSURE STATEMENT

This equipment meets the SAR evaluation limits given in RSS-102 Issue 5 requirements at the minimum separation distance of 15 mm to the human body. Note: Any changes or modifications to this device that are not expressly approved by the manufacturer, will void the warranty and the user's authority to operate the equipment.

IC ID: 21098-ESPC3MINI1



Wi-Fi® is a registered trademark of Wi-Fi Alliance®.

# warranty

This product is warranty under normal use against deficits in workmanship and materials for one (1) year following your purchase. If the product fails due to a manufacturing defect during normal use, contact the store where purchased or contract technical support at 1-877-833-3303.

A dated sales receipt must be provided for all replacement requests (legible copies are acceptable).

Additional warranty details are available at <http://www.legrand.us> under your device's product page.

# customer support:

Please contact our customer support team for assistance.

Available Monday – Friday, 8AM – 6PM ET (Excluding Holidays)

Phone: (877) 833-3303

E-mail: [smartlights@legrand.us](mailto:smartlights@legrand.us)



**Legrand, North America**

50 Boyd Avenue  
Syracuse, NY 13209  
1-877-833-3303  
[www.legrand.us](http://www.legrand.us)