


Analog Output Modules EP-4164, EP-4264

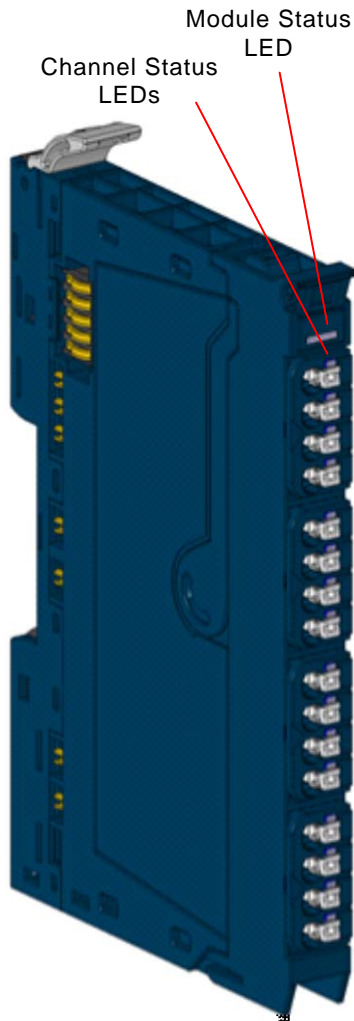

Analog Output Module

GE provides RSTi-EP analog output modules with up to 4 analog outputs at ± 10 V, ± 5 V, 0-10 V, 0-5 V, 2-10 V, 1-5 V, 0-20 mA or 4-20 mA. The resolution is 16 bit per channel. An output can be connected to each connector, the internal switching is carried out automatically. The output range is defined using parameterization. A status LED is assigned to each channel. The outputs are supplied with power from the output current path (I_{OUT}).

The EP-4264 module provides individual channel diagnosis with channel related error messages.

Each module features a type plate, which includes identification information, the key technical specifications, and a block diagram. In addition, a QR code allows for direct online access to the associated documentation. The software for reading the QR code must support inverted QR codes.

Markers are available as accessories for labelling equipment. Each I/O module can be labelled using the markers to ensure clear identification when replacing individual modules or electronic units.

The RSTi-EP station is usually installed on a horizontally positioned DIN rail. Installation on vertically positioned DIN rails is also possible.

The outputs as well as the sense-lines of the AO modules must not be used as power outputs.

Modules should be allowed to de-energize for a minimum 10 seconds after power down, prior to starting any maintenance activity.

Refer to the *RSTi-EP Slice I/O User Manual* (GFK-2958) for additional information.

Refer to the *RSTi-EP Power Supply Reference Guide*, a software utility available on PME V9.00, for detailed power-feed requirements.

Module Features

- Control up to four analog outputs
- Module diagnosis
- *Spring style* technology for ease of wiring
- DIN rail mounted
- Double-click installation for positive indication of correct installation
- Supports indirect firmware update through the network monitor
- Supports hot insertion and extraction

GFK-2961A

Ordering Information

Module	Description
EP-4164	Analog Output, 4 Channels Voltage/Current 16 Bits 2, 3, or 4-Wire
EP-4264	Analog Output, 4 Channels Voltage/Current 16 Bits with Diagnostics 2, 3, or 4-Wire

Specifications

	EP-4164	EP-4264
System Data		
Data	Process, parameter, and diagnostic data depend on the network adapter used.	
Interface	RSTi-EP system bus	
System bus transfer rate	48 Mbps	
Potential isolation	Channel/system bus = yes Channel/channel = no	
Outputs		
Number	4	
Output levels	1. Voltage (0 – 5 V, ±5 V, 0 – 10 V, ±10 V, 1 – 5 V, 2 – 10 V) 2. Current (0 – 20 mA, 4 – 20 mA)	
Response time	1 ms for 4 channels	
Resolution	16 bits	
Accuracy	0.1 % FSR max., 0.05 % FSR typ.	
Temperature coefficient	20 ppm voltage / 31 ppm current measurement / K	
Max. error between T _{min} and T _{max}	±220 ppm FSR	
Monotony	Yes	
Crosstalk between the channels	±0.001 % FSR max.	
Repeat accuracy	< ±1 mV eff.	
Output ripple	max. 0.001 %	
Voltage load resistance	≥ 1 kΩ (at > 50°C (122 °F) max ambient temperature, total sensor current of 10 mA per channel but 25 mA per module)	
Current load resistance	≤ 600 Ω including field cable resistance	
Actuator connection	2-wire (current and voltage; automatic detection), 4-wire (voltage)	
Short-circuit-proof	Yes	
Module diagnosis	Yes	
Individual channel diagnosis	No	Yes
Substitute value	Yes	
Can be used with EP-19xx module	Yes	
Supply		
Supply voltage	20.4V – 28.8V	
Current consumption from system current path I _{sys}	8 mA	
Current consumption from output current path I _{out}	85 mA	

	EP-4164	EP-4264
General data		
Operating temperature	-20°C to +60°C (-4 °F to +140 °F)	
Storage temperature	-40°C to +85°C (-40 °F to +185 °F)	
Air humidity (operation/transport)	5% to 95%, noncondensing as per IEC 61131-2	
Width	11.5 mm (0.45 in)	
Depth	76 mm (2.99 in)	
Height	120 mm (4.72 in)	
Weight	83 g (2.93 oz)	98 g (3.47 oz)

Current Demand for Analog Output Modules

Product	I _{sys}	I _{IN}	I _{OUT}	I _s	I _L
EP-4164	8 mA	--	85 mA	--	--
EP-4264	8 mA	--	85 mA	--	--
I _{sys}	Current consumption from the system current path				
I _{IN}	Power consumption from input current path				
I _{OUT}	Power consumption from output current path				
I _s	Current demand of the connected sensors				
I _L	Current demand of the connected actuators				
x	Must be included when calculating the power supply				

LEDs

LED	EP-4164	EP-4264
Module Status	Green: Communication over the system bus Red: Module System Fault or Diagnostic Fault	Green: Communication over the system bus Red: Module System Fault or Diagnostic Fault
1.1	Red: Channel 0 at voltage output: overload short-circuit, at current output: shunt resistance too high or line break detected	Red: Channel 0 at voltage output: overload short-circuit, at current output: shunt resistance too high or line break detected
1.2	--	--
1.3	--	--
1.4	--	--
2.1	Red: Channel 1 at voltage output: overload short-circuit, at current output: shunt resistance too high or line break detected	Red: Channel 1 at voltage output: overload short-circuit, at current output: shunt resistance too high or line break detected
2.2	--	--
2.3	--	--
2.4	--	--
3.1	Red: Channel 2 at voltage output: overload short-circuit, at current output: shunt resistance too high or line break detected	Red: Channel 2 at voltage output: overload short-circuit, at current output: shunt resistance too high or line break detected
3.2	--	--
3.3	--	--
3.4	--	--
4.1	Red: Channel 3 at voltage output: overload short-circuit, at current output: shunt resistance too high or line break detected	Red: Channel 3 at voltage output: overload short-circuit, at current output: shunt resistance too high or line break detected
4.2	--	--
4.3	--	--
4.4	--	--

For public disclosure