


# OWP-FC-216-LED

LED Slimline Full Cut-Off Wall Pack Series

**up to 90 Wattage / up to 10500 Lumens**

<b>Catalog Number:</b>	
<b>Project Name:</b>	
<b>Note:</b>	<b>Type:</b>

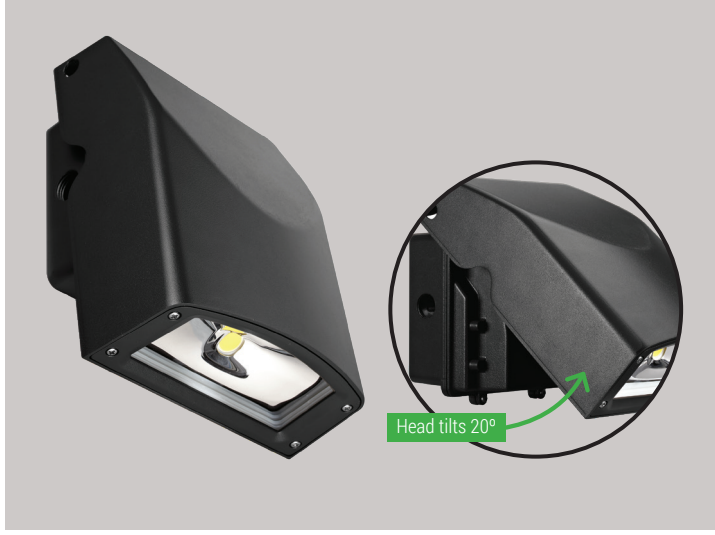


**APPLICATIONS:**

The large slim LED wall pack provides outdoor illumination utilizing a low-profile and provides versatility with an adjustable head tilt. Shallow distribution allows for varying mounting heights. With low mounting height they can be used to highlight key areas such as entrances, loading docks, and danger areas. When continuous row high mounting is utilized they can be used as wall washes or to illuminate small to mid-size areas. Ideal for low rise offices, apartments, hospitality, retail, and education.


**FEATURES:**

- Sealed die-casting profile for outdoor applications
- Available in Type II photometry
- Head tilts max 20° vertically to extend coverage area
- Replacing 175-250W MH
- Lumen output from 8000-10500lm with efficacy of 103lm/W
- Built-in UL class 2 driver, optional for photocell
- UL Wet location listed

**DIMENSION:**

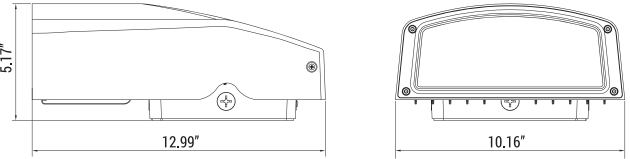

**PHOTOMETRICS:**

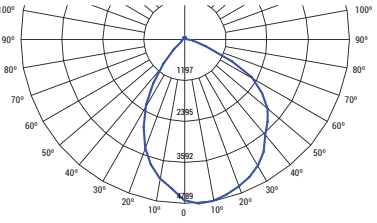

<b>B</b>	<b>U</b>	<b>G</b>
3	1	1

**• SPECIFICATIONS: LUMENS**

<b>WATTAGE</b>	8000 / 10500 lumens
<b>CCT</b>	70W / 90W
<b>CRI</b>	40K, 50K
<b>LIGHT EFFICIENCY VOLTAGE</b>	70
<b>POWER FREQUENCY FINISH</b>	103 lumens/watt
<b>APPLICABLE ENVIRONMENT</b>	120-277 VAC
<b>WORKING TEMPERATURE</b>	50/60 Hz
	Bronze
	Dry/Damp/Wet location
	-40°C to 45°C



Ordering Guide > Example: **OWP-FC-216-LED-10000L-MVOLT-40K-BZ**

<b>OWP-FC-216-LED</b>					
<b>SERIES</b>	<b>PERFORMANCE</b>	<b>VOLTAGE</b>	<b>CCT</b>	<b>FINISH</b>	<b>ACCESSORIES</b>
OWP-FC-216-LED	8000L - 8000 lumens 10000L - 10500 lumens	MVOLT - 120/277V	40K - 4000K 50K - 5000K	BZ - Bronze	WPPHC - Photocell



Submittal form is available @ [www.oraclelighting.com](http://www.oraclelighting.com)  
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions subject to change without notice.