


ORDERING INFORMATION

Order code: 62776
 Description: LED/GU10/6W/NFL/30K/25/D/ELUME
 UPC: 069549627765
 Case quantity: 24

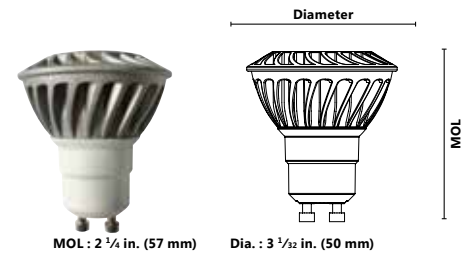

PERFORMANCE DATA


Shape: ES16
 Wattage (W): 6
 Lamp voltage (VAC): 120
 Colour temperature (K)**: 3 000
 Average life (L70 hours): 25 000
 Initial lumens (lm)*: 340
 Initial lumens per watt (lm/W): 53
 CBCP: 1 100
 CRI: 82
 Beam angle: 25
 Power factor: ≥ 0.6
 Operating temperature range: -20 °C/4 °F to 50 °C/122 °F
 Base: GU10

*Initial lumens range: +/- 5 %

**Typical colour temperature range: +/- 5 %



BEAM SPREAD

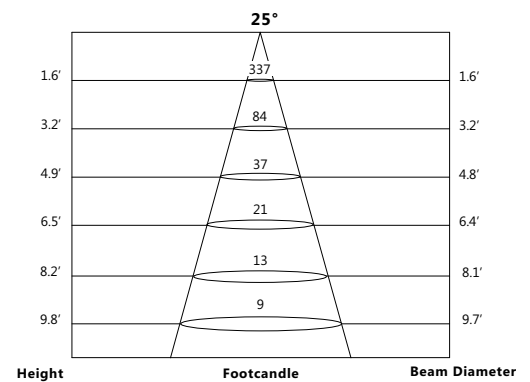

COMPATIBLE DIMMER LIST

LUTRON DIMMERS: S-600, DV-600P, LG-600, DV-603, GL-600, DNG-600, S-603, AY-600, TG-600, 0-600, NTLV-600, SLV-600, NTELV-600, SELV-300, DVELV-300.

OTHER DIMMERS: Leviton IPI 06, 6161, RTD01, 6633P, 6684, RPI 06, 6615P, 6681, 6631; Panasonic NQ20345, WN575259.

CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electric shock – do not use where directly exposed to water or weather.
- Suitable for use in open fixtures.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Added weight of the device may cause instability of a freestanding portable luminaire. Use in portable table lamps in which the distance from the bottom of the base to the top of the lampholder does not exceed three (3) times the minimum base diameter.
- Use only on 120 VAC, 60 Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Compatible with most dimmers.
- Three year limited warranty.
- For complete dimmer compatibility and warranty information visit www.standardpro.com.
- Operating temperature: -20 °C/4 °F to 50 °C/122 °F.
- NOTES: This device complies with Part 15 of the FCC rules and has been tested and found to comply with the limits for a Class B digital device. This product may cause interference with other devices. If interference occurs, change the location of the product. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment. This RFLD device complies with Canadian ICES-003. LED lamps must be stored, operated under suitable environmental conditions and in accordance with, but not limited to, the latest National Electrical Code, cETLus, cULus, CSA and ANSI specifications.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

January 13, 2013