

dimmer/countdown timer switch (two loads)



dimmer* (top)


- tap on to favorite light level; tap off
- tap twice for full on
- touch rocker to adjust light level

timer switch (bottom)

- tap on to start timer; tap off
- tap twice for untimed on
- touch rocker to adjust countdown time
- one minute warning before fan or lights go off
- top LED is full on with no timer action

single pole 300W light (top) **MA-L3T251-**
(incandescent/halogen) **NEW**
2.5A timer switch (bottom)
lighting load and/or general
purpose fan(s)
(single location only)

* minimum load is 40 W/VA

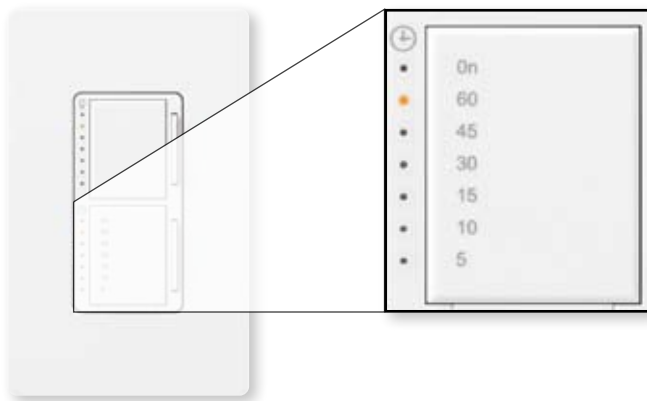

countdown timer switch (5-60 minutes/full on)



- use with exhaust fans to reduce moisture, mold, and mildew in bathrooms and kitchens
- use with lighting
- tap on to start timer; tap off
- tap twice for untimed on
- touch rocker to adjust countdown time
- one minute warning before fan or lights go off
- top LED is full on with no timer action

single pole, no neutral required 600W/VA (5 A) **MA-T51-**
on/off lighting load
(incandescent/halogen, MLV)
OR 3A general purpose fan(s)

single pole/multi-location neutral required 600W/VA (5 A) **MA-T51MN-**
on/off lighting load
(incandescent/halogen, MLV, ELV, fluorescent)
OR 3A general purpose fan(s)

use MA-T51MN- with a companion switch (MA-AS- or MSC-AS-) for multi-location switching

countdown timer switch† (5-30 minutes)



- use with exhaust fans to reduce moisture, mold, and mildew in bathrooms and kitchens
- use with lighting
- tap on to start timer; tap off
- tap twice for untimed on
- touch rocker to adjust countdown time
- one minute warning before fan or lights go off
- timer always turns off

single pole 600W/VA (5 A) **MA-T530G-**
on/off lighting load **NEW**
(incandescent/halogen, MLV)
OR 3A general purpose fan(s)

† available in white, ivory, almond, and light almond

See page 53 for available colors.

To order, add color suffix to model number.

Example: **MA-L3T251- HT**