


XT Fusible Combination Plug & Play with 22mm Cover Control kits

Quick Connect XT Motor Starter will save time and money!

- Compact and robust design for ease of mounting
- Quick and easy component assembly
- Utilizes XT Series Contactors (sizes B-D) and overloads
- 100kA SC rating
- "Fixed Adjustable" type overload relays are available
- Overload "Reset" Pushbutton comes standard
- Choose from 19 different cover control options
- Available up to 40hp @ 600Vac
- EEMAC 1/12/3R rated enclosure
- CSA and cCSAus approved

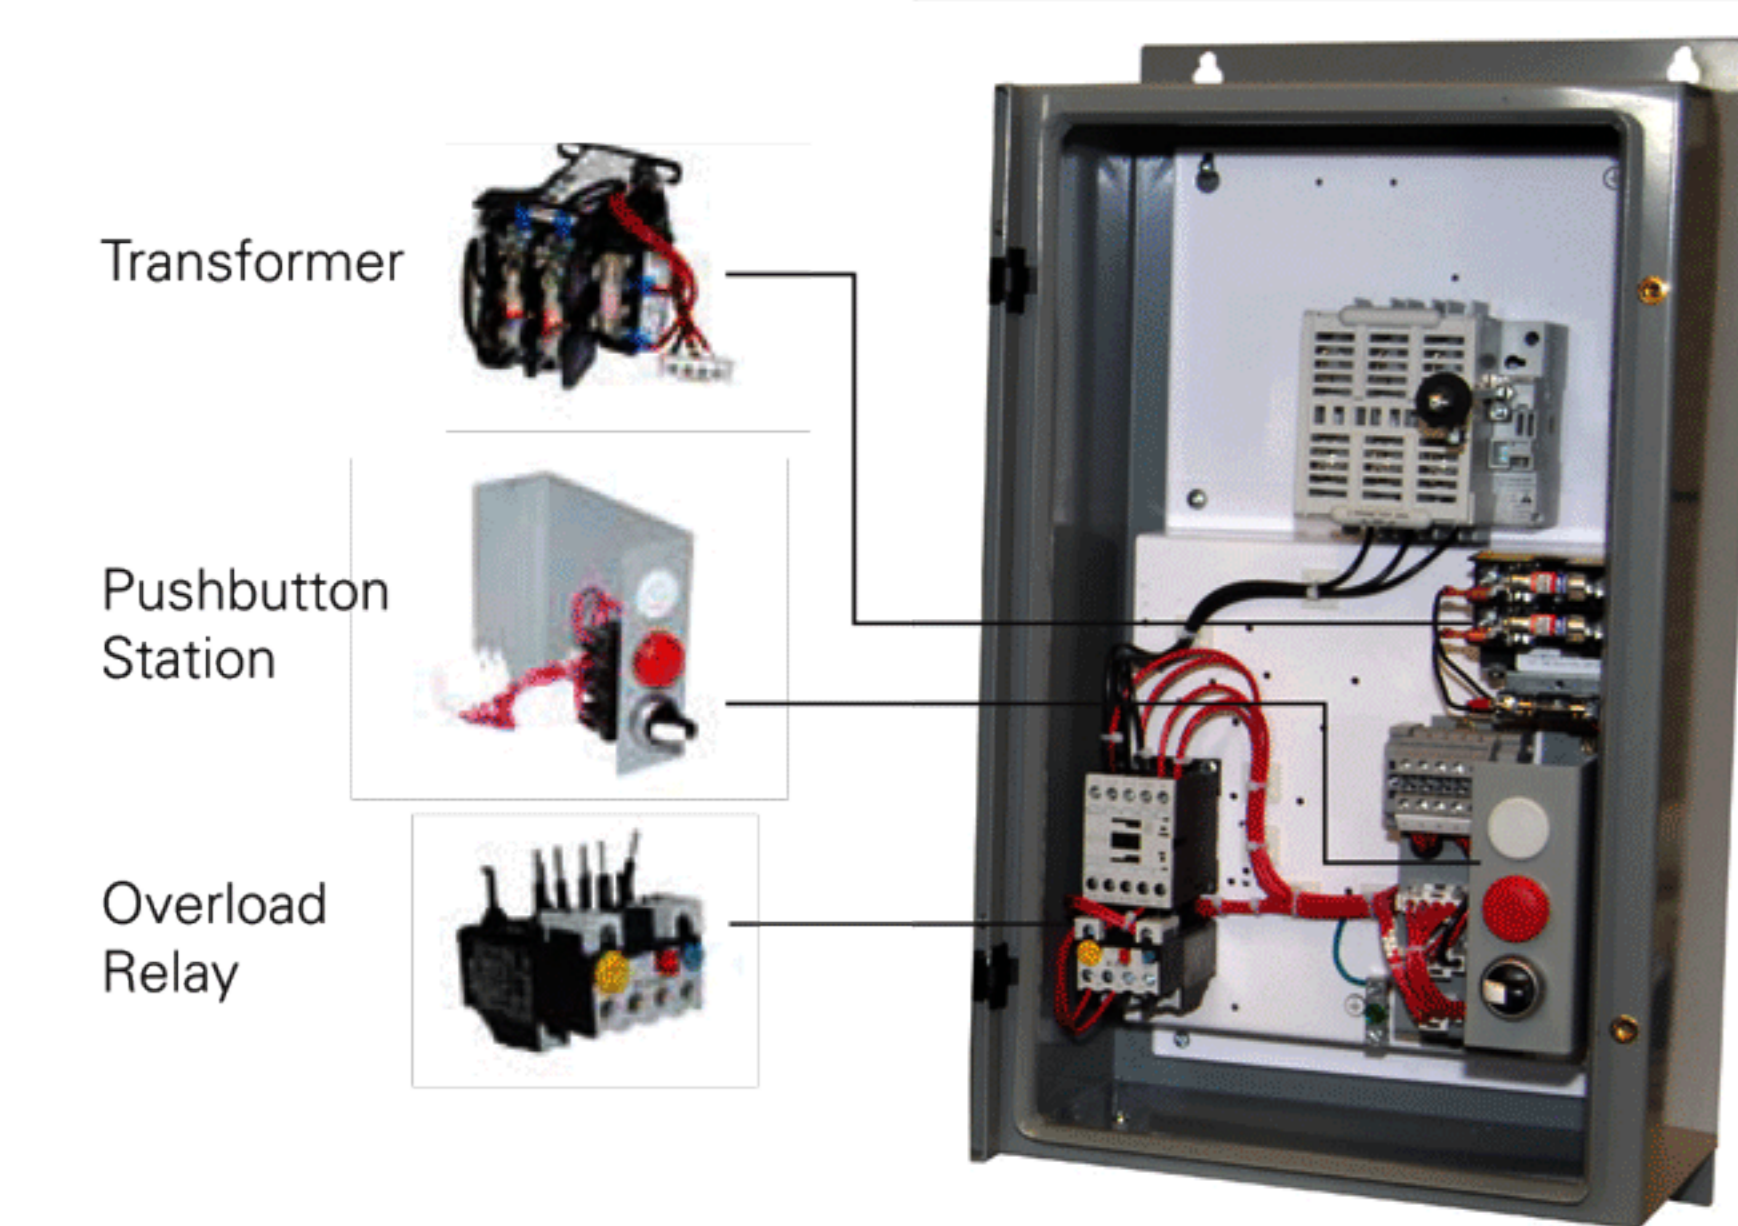

MAX UL HP						MAX UL CUR. @ 600V AC AC-3	600V AC IEC 947 THERMAL CURRENT AC-1	NEMA 1,12,3R Enclosed Contactor CAT #	Frame Size	Enclosure Dimensions (WxHxD)	Control Voltage
120Vac, 1 Ø	240Vac, 1 Ø	208Vac, 3 Ø	240Vac, 3 Ø	480Vac, 3 Ø	600Vac, 3 Ø						
0.75	2	3	3	7.5	10	15.5	20	EPX19E	B	12.50x22.75x8.50	120vac
2	5	7.5	7.5	15	20	25	40	EPX19G	C	12.50x22.75x8.50	120vac
3	7.5	10	15	30	40	40	50	EPX19J	D	12.50x22.75x8.50	120vac
0.75	2	3	3	7.5	10	15.5	20	EPX19ET	B	12.50x22.75x8.50	24vac
2	5	7.5	7.5	15	20	25	40	EPX19GT	C	12.50x22.75x8.50	24vac
3	7.5	10	15	30	40	40	50	EPX19JT	D	12.50x22.75x8.50	24vac
Overload Selection	Overload Trip Range in Amperes					Transformer			Cat #	Secondary voltage	
Frame B overloads											
XTOBP40BC1	0.25 - 0.40					Transformer Kit 208/120V (PRIMARY FUSED)			EPTX208P	120vac	
XTOBP60BC1	0.40 - 0.60					Transformer Kit 240/120V (PRIMARY FUSED)			EPTX240P	120vac	
XTOB001BC1	0.60 - 1.00					Transformer Kit 480/120V (PRIMARY FUSED)			EPTX480P	120vac	
XTOB1P6BC1	1.00 - 1.60					Transformer Kit 600/120V (PRIMARY FUSED)			EPTX600P	120vac	
XTOB2P4BC1	1.60 - 2.40					Transformer Kit 208/24V (PRIMARY FUSED)			EPTX208PT	24vac	
XTOB004BC1	2.40 - 4.00					Transformer Kit 240/24V (PRIMARY FUSED)			EPTX240PT	24vac	
XTOB006BC1	4.00 - 6.00					Transformer Kit 480/24V (PRIMARY FUSED)			EPTX480PT	24vac	
XTOB010BC1	6.00 - 10.0					Transformer Kit 600/24V (PRIMARY FUSED)			EPTX600PT	24vac	
XTOB012BC1	9.00 - 12.00					Transformer Kit 120/24V (PRIMARY FUSED)			EPTX120PT	24vac	
XTOB016BC1	12.00 - 16.00					Control Kit M22 (Frame)/Separate Control Kit			Cat # 120vac	Cat # 24vac	
Frame C Overloads						Separate supply Control Kit			EP120P	EP24P	
XTOB016CC1	10.0 - 16.0					Start/Stop P.B.			M22GK1PXPB		
XTOB024CC1	16.0 - 24.0					Start/Stop P.B. & Red Light			M22GK12PXPB	M22GK12PXPBT	
XTOB032CC1	24.0 - 32.0					Start/Stop S.S			M22GK1PX		
Frame D Overloads						Start/Stop S.S. & Red Light			M22GK12PX	M22GK12PXT	
XTOB024DC1	16.0 - 24.0					Start/Stop S.S. & Red/Green Lights(B-C)			M22GK16PX	M22GK16PXT	
XTOB040DC1	24.0 - 40.0					Start/Stop S.S. & Red/Green Lights (D)			M22GK16PXD	M22GK16PXD	
XTOB057DC1	40.0 - 57.0					HOA S.S.			M22GK3P		
						HOA S.S. & Red Light			M22GK32AP	M22GK32APT	
						HOA S.S. & Red/Green Lights (Frames B-C)			M22GK36AP	M22GK36APT	
						HOA S.S. & Red/Green Lights (Frame D)			M22GK36APD	M22GK36APDT	
1) Select the contactor assembly						Assembly for Remote Control and without Cover Control			Cat #		
2) Choose an Overload if required						NO COVER CONTROL KIT NON-COMBO NEMA 1			NOCOVERCONT		
3) Add transformer/ Separate Control						NO COVER CONTROL KIT NEMA 12/3R			NOCOVERCONT2		
4) Add Accessories as required											