WIREMOLD®
Communication Modules

Open System Communication Connectivity Solutions

CM Series Open System Communication Modules support open system architecture by providing a variety of unloaded modules to accept devices from Ortronics® and other industry leading manufacturers. Mounting industry standard communication devices in Wiremold wire and cable management systems has never been easier. These open system modules provide a flexible and aesthetically pleasing way to easily connect communication cabling at the point-of-use.

**Shown: Dual and Single Unloaded Keystone Jack Modules.**

FEATURES & BENEFITS

■ **Open system capabilities.** Unloaded modules are available to accept a wide range of industry standard keystone jacks, SC & ST fiber optic adapters, as well as, select proprietary solutions from AMP NET CONNECT, Avaya/Lucent and NORDX.

■ **Wire management compatible.** Modules snap securely into Wiremold communication ready device brackets featuring 2A & 6A openings for an aesthetically pleasing look.

■ **Installation and configuration ease.** Modules feature a front load snap-in design for ease of installation and allowing outlet configuration changes to be made quickly.

■ c(UL)us Listed.

Communication modules provide a seamless point-of-use interface in Wiremold wire and cable management systems.
Shown: Vista Architectural Column, OFR Series Overfloor Raceway and Prewired Aluminum Raceway.

CM Series Open System Modules Ordering Information

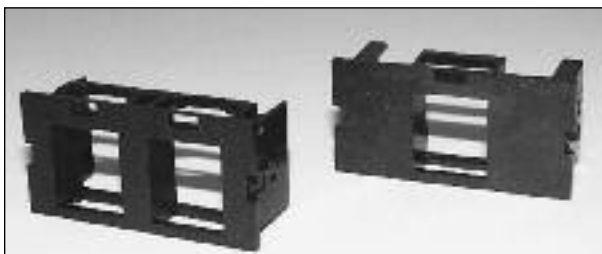| Catalog No./Item	Description/Specifications	Catalog No./Item	Description/Specifications
CM2-U2TJ	**2A, Dual Flushmount Unloaded Ortronics® TracJack® Module** – For mounting two Ortronics® TracJack devices.	**CM2-U1NOR**	**2A, Single Flushmount NORDX/ CDT Unloaded Module** – For use with MDVOFlex Jacks and Fiber Modules.
CM2-U2AMP	**2A, Single Unloaded AMP NETCONNECT Module** – For mounting two AMP NETCONNECT SL Series devices.	**CM2-U2NOR**	**2A, Dual Flushmount NORDX/ CDT Unloaded Module** – For use with MDVOFlex Jacks and Fiber Modules.
CM2-U1ATT	**2A, Single Unloaded Avaya/Lucent Module** – For use with M-Series Jacks and LC Adapters.	**CM2-U2ST**	**2A, Dual Unloaded ST Adapter Module**
CM2-U2ATT	**2A, Dual Unloaded Avaya/Lucent Module** – For use with M-Series Jacks and LC Adapters.	**CM2-U2SC**	**2A, Unloaded Duplex SC Adapter Module**
CM2-U1KEYA	**2A, Single Flushmount Unloaded Keystone Module** – For mounting jacks with a latching area of 0.57" x 0.76" [14.5mm x 19.3mm].	**CM2-BL**	**Blank Insert**
CM2-U2KEYA	**2A, Dual Flushmount Unloaded Keystone Module** – For mounting jacks with a latching area of 0.57" x 0.76" [14.5mm x 19.3mm].		

NOTE: Standard color is Ivory, for other colors add suffix: "-WH" for White, "-GY" for Light Gray (matches aluminum and nonmetallic raceways), "-BK" for Black, and "-G" for Gray (matches Gray steel raceways).
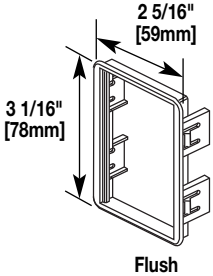

Shown: Dual and Single Unloaded Keystone Jack Modules.

6A Communication Opening

1 3/4" [44mm]

2 7/8" [73mm]

2A + 2A + 2A

6A size opening

CM Series Communication Module Mounting Adapters Ordering Information

Catalog No./Item	Description/Specifications
CM-EPLA*	**End Plates** – Includes two outlet identification labels with clear covers and two matching screw covers. Required for mounting Pass & Seymour® Activate™ and Wiremold Open System communication modules into 4050, 5450, 5550, 2344SD-2A, 2344D-2A, WSX07-X, 40N2, 60N2, and CXN Series device brackets.
CM-MAB 2 5/16" [59mm] 3 1/16" [78mm] Flush	**6A Mini Adapter 6A Opening** – Must be purchased separately for mounting modules into Walker Systems where it is indicated they are not included. Available in ivory.
CM-ARA*	**Angled Raceway Adapter** – With two outlet identification labels with clear covers and two matching screw covers. Provides angled exit in multichannel raceway systems and WallSource™ Boxes. Accepts two 2A size modules. Snaps into standard device mounting brackets.

* Standard color is Ivory, for other colors add suffix: "-WH" for White, or "-G" for Gray (matches Gray steel raceways).

CM Series Faceplates Ordering Information

Catalog No./Item	Description/Specifications	Catalog No./Item	Description/Specification
CM-SFP	**Single Gang Faceplate** – For mounting three (3) CM2 Series modules or Pass & Seymour® Activate™ Series device modules.	**CM-SAP**	**Single Gang Angled Faceplate** – For mounting three (3) CM2 Series modules or Pass & Seymour® Activate™ Series device modules.
CM-DFP	**Double Gang Faceplate** – For mounting six (6) CM2 Series modules or Pass & Seymour® Activate™ Series device modules.	**CM-DAP**	**Double Gang Angled Faceplate** – For mounting four (4) CM2 Series modules or Pass & Seymour® Activate™ Series device modules.

NOTE: Add suffix "-WH" to indicate White finish.

Shown: Dual and Single Unloaded Keystone Jack Modules.

NOTES

ED1119R8 – Updated July 2013 – For latest specs visit www.legrand.us/wiremold