


WallSource Box Series

Catalog No./Item **Description/Specifications**


WSX42-X **WallSource Box, Dividers, Mounting Brackets** – Field installed slide-in dividers, separate the box for communications and power. Adjustable mounting brackets offer flexibility to mount box 1/2" [12.7mm], 5/8" [15.9mm], 1" [25mm], and 1 1/4" [32mm] wall applications.



Cat. No.	L	W	D	Gang	Trade Size KOs
WSB42-2	4 3/4" [121mm]	5" [127mm]	3 1/4" [83mm]	2	1/2, 3/4, 1
WSA42-4	9 3/16" [233mm]	5" [127mm]	3 1/4" [83mm]	4	1/2, 3/4, 1, 1 1/2
WSC42-6	13 3/4" [350mm]	5" [127mm]	3 1/4" [83mm]	6	1/2, 3/4, 1, 1 1/2

WSX07-XA* **Device Mounting Bracket and Trim Ring** – Self-leveling bracket accommodates a wide variety of electrical and communications devices including Activate inserts. The trim ring hides the holecut to give the box a finished look. For use with:


- 5507 Series Faceplates
- Ortronics® TracJack & Series II Modules
- Pass & Seymour Activate Series Inserts
- Wiremold Open System Communication Modules

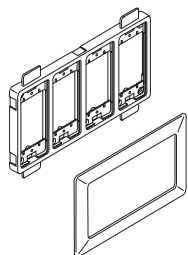


ORT
P&S
OPEN

Cat. No.	L	W	D	Gang
WSB07-2A*	6 13/16" [173mm]	7" [177mm]	-	2
WSA07-4A*	11 1/4" [286mm]	7" [177mm]	-	4
WSC07-6A*	15 13/16" [402mm]	7" [177mm]	-	6

WSA86† **Backfeed Kit** – For backfeeding large raceway systems: V/G4000, V/G6000, 5400, 5500, and ALA4800. Use the dividers for UL Listed separation. The backfeed plate completely covers the wall holecut (only needed with 4000 and 6000 Series raceway). Includes ivory and gray pieces.




WSA00-4** **Open Architecture Device Mounting Bracket** – Self-leveling bracket accommodates a wide variety of electrical and communications devices. This bracket accommodates a standard single- and dual-gang faceplate. The trim ring hides the holecut and gives the box a finished look.




ORT
P&S
OPEN

Catalog No./Item **Description/Specifications**


FSS-18 **Fiber Storage Loop** – Use this loop to store 18" [457mm] of cable with a controlled 1" [25mm] bend radius.

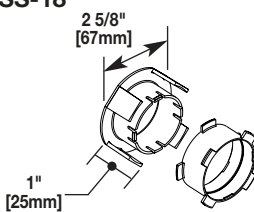


CM-EPLA **End Plates** – Includes two outlet identification labels with clear covers and two matching screw covers. Required for mounting Pass & Seymour Activate™ and Wiremold Open System communication modules into the WSX07-X Series device brackets.



S2-EPL* **End Plates** – Includes two outlet identification labels with clear covers and two matching screw covers. Required for mounting Ortronics® Series II modules into the WSX07-X Series device brackets.



Installation Flexibility

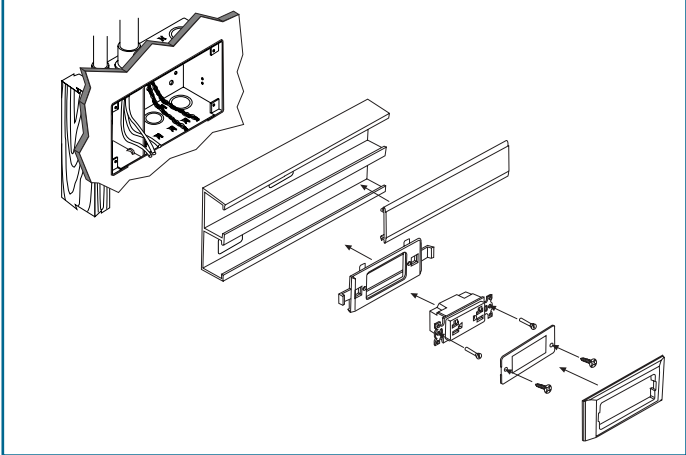

The four-gang WallSource Box installed during construction accommodates the wire and cabling to feed a surface raceway system.

NOTE: All faceplates have a standard measurement of 4 1/4" x 1 7/8" [108mm x 34mm].
 * Add "-WH" Suffix for white finish.
 † For use with WSA42-4 only.