


WallSource Box Series

Catalog No./Item **Description/Specifications**


WSX42-X



WallSource Box, Dividers, Mounting Brackets – Field installed slide-in dividers, separate the box for communications and power. Adjustable mounting brackets offer flexibility to mount box 1/2" [12.7mm], 5/8" [15.9mm], 1" [25mm], and 1 1/4" [32mm] wall applications.

Cat. No.	L	W	D	Gang	Trade Size KOs
WSB42-2	4 3/4" [121mm]	5" [127mm]	3 1/4" [83mm]	2	1/2, 3/4, 1
WSA42-4	9 3/16" [233mm]	5" [127mm]	3 1/4" [83mm]	4	1/2, 3/4, 1, 1 1/2
WSC42-6	13 3/4" [350mm]	5" [127mm]	3 1/4" [83mm]	6	1/2, 3/4, 1, 1 1/2

WSX07-XA*

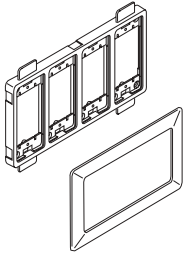


Device Mounting Bracket and Trim Ring – Self-leveling bracket accommodates a wide variety of electrical and communications devices including Activate inserts. The trim ring hides the holecut to give the box a finished look. For use with:

- 5507 Series Faceplates
- Ortronics® TracJack & Series II Modules
- Pass & Seymour Activate Series Inserts
- Wiremold Open System Communication Modules


Cat. No.	L	W	D	Gang
WSB07-2A*	6 13/16" [173mm]	7" [177mm]	-	2
WSA07-4A*	11 1/4" [286mm]	7" [177mm]	-	4
WSC07-6A*	15 13/16" [402mm]	7" [177mm]	-	6

WSA86†



Backfeed Kit – For backfeeding large raceway systems: V/G4000, V/G6000, 5400, 5500, and ALA4800. Use the dividers for UL Listed separation. The backfeed plate completely covers the wall holecut (only needed with 4000 and 6000 Series raceway). Includes ivory and gray pieces.


WSA00-4**



Open Architecture Device Mounting Bracket – Self-leveling bracket accommodates a wide variety of electrical and communications devices. This bracket accommodates a standard single- and dual-gang faceplate. The trim ring hides the holecut and gives the box a finished look.


Catalog No./Item **Description/Specifications**

FSS-18

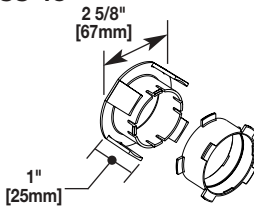


Fiber Storage Loop – Use this loop to store 18" [457mm] of cable with a controlled 1" [25mm] bend radius.

CM-EPLA




End Plates – Includes two outlet identification labels with clear covers and two matching screw covers. Required for mounting Pass & Seymour Activate™ and Wiremold Open System communication modules into the WSX07-X Series device brackets.

S2-EPL*



End Plates – Includes two outlet identification labels with clear covers and two matching screw covers. Required for mounting Ortronics® Series II modules into the WSX07-X Series device brackets.

Installation Flexibility

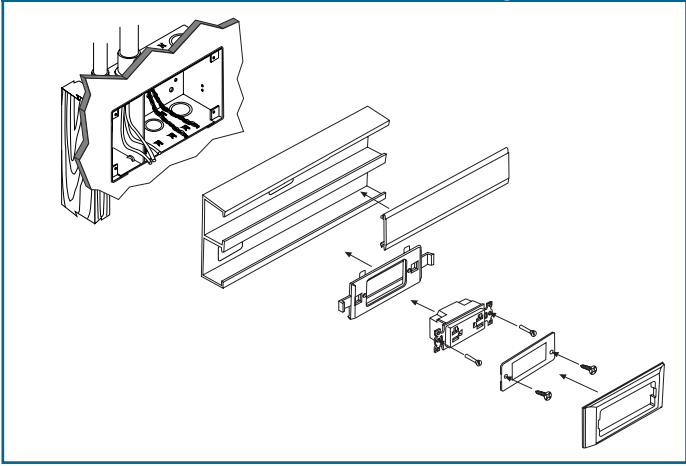

The four-gang WallSource Box installed during construction accommodates the wire and cabling to feed a surface raceway system.

NOTE: All faceplates have a standard measurement of 4 1/4" x 1 7/8" [108mm x 34mm].

* Add "-WH" Suffix for white finish.

† For use with WSA42-4 only.

WallSource Multiple Service Box



At last, multiple services without the hassle of multiple wall boxes. The Wiremold WallSource multiple service box provides power and communications connections at one single point in the wall.

Faceplates and connectivity inserts fit virtually any configuration and install in seconds. Keeping up with technology changes is a breeze!

Adjustable mounting brackets offer the flexibility to quickly mount the box between 16" [406mm] studs and at various wall thicknesses. Multiple knockouts on the top and bottom make access easy. The dividers simply slide-in, to separate power and communications wiring.



Install four-gang WallSource box during construction to house the wire and cabling to feed a surface raceway system. For a flexible wiring system.



WallSource box shown with angled raceway adapter and Sentrex® surge receptacle.

Features & Benefits

- **Adjustable mounting brackets.** Mount box in 1/2", 5/8", 1" and 1 1/4" [12.7mm, 15.9mm, 25mm and 32mm] wall applications with these brackets.
- **Feed a room.** The box feeds our large raceway systems with one drop location (WSA42-4 Box only).
- **Color options.** White and ivory faceplates, trim rings, and Activate devices available to match decor.
- **Dividers.** The field installed barriers provide shielding to allow communications and power in one in-wall box.
- **Knockouts.** Accommodates 1/2", 3/4", 1", and 1 1/2" trade size openings.
- **System flexibility.** Expand the system by removing device mounting bracket and pull wire into surface raceway (WSA42-4 Box only).
- **5507 Series faceplate compatible.** Common to many Wiremold systems, these aesthetically pleasing faceplates are readily available.
- **Accommodates multiple services.** Housing power and communications services in one box eliminates multiple drops and uneven faceplates on the wall.
- **Available fiber storage spool.** Holds 18" [457mm] of excess cables for future use.
- **Helps reduce installation time.** Compared to installing multiple boxes for power and communications, install one WallSource box for quicker installation.
- **Aesthetically pleasing.** Using one box eliminates multiple, uneven faceplates on the wall.
- **Open architecture device mounting bracket.** Accommodates industry standard devices and faceplates (WSA42-4 Box only).
- **Datacom connectivity options.** Accepts industry standard and proprietary devices from a wide range of manufacturers to provide a seamless and aesthetically pleasing interface for voice, data, audio, and video applications at the point of use.

