LED RETROFIT SERIES

iFit ECONOMY UNIVERSAL LED RETROFIT LENSED **BAFFLE MODULE**



RL625-14W-120-DIM-FL-30K-W-WH FITS INMOST6"AND5"SHALLOW& REGULAR INCANDESCENT HOUSINGS

LED RETROFIT iFit MODULE

iFit ADJUSTABLE LED RETROFIT LENSED MODULE



CCT 30K 40K WATTS LUMENS

RL663-14W-120-DIM-FL-FITS INMOST 6" AND 5" SHALLOW & REGULAR INCANDESCENTHOUSINGS **RL628 - UNIVERSAL** LED RETROFIT LENSED MODULE





RL428 - 4" LED

RETROFIT

LENSED MODULE

RL628950L-DIVITR-12030K-90WWH FITS NMOST 6" AND 5" SHALLOW & REGULAR INCANDESCENT HOUSINGS

RL428650L-DIMTR-12030K-90W-WH FITS INMOST4"SHALLOW& REGLIARNCANDESCENTHOUSINGS

LED RETROFIT MODULE

6" PREMIUM LED RETROFIT LENSED BAFFLE MODULE



RL630-650L-DIMTR-120-___K-W-WH* 6"LEDRETROFITLENSEDSTEPPEDBAFFLE

650 LUMENS

6" PREMIUM LED RETROFIT LENSED REFLECTOR MODULE



RL607-650L-DIMTR-120-___K-W-WH* 6"LEDRETROFIT LENSEDREFLECTOR

650 LUMENS

CCT 27K 30K 35K 3 40K □ 50K

5" PREMIUM LED RETROFIT LENSED BAFFLE MODULE 5" PREMIUM LED RETROFIT LENSED REFLECTOR MODULE



RL530-650L-DIMTR-120-___K-W-WH* 5"LEDRETROFITLENSEDSTEPPEDBAFFLE

650 LUMENS

CCT □ 27K □ 30K □ 35K □ 40K □ 50K



RL507-650L-DIMTR-120-___K-W-WH*

5"LEDRETROFIT LENSEDREFLECTOR

650 LUMENS

CCT □ 27K □ 30K □ 35K □ 40K □ 50K

4" PREMIUM LED RETROFIT LENSED BAFFLE MODULE 4" PREMIUM LED RETROFIT LENSED REFLECTOR MODULE



RL430-650L-DIMTR-120-___K-W-WH* 4"LEDRETROFITLENSEDSTEPPÉDBAFFLE

650 LUMENS

CCT 27K 30K 35K 40K 50K

RL407-650L-DIMTR-120-K-CL-WH* (W-WH*) 4"LEDRETROFIT LENSEDREFLÉCTOR

650 LUMENS

CCT □ 27K □ 30K □ 35K □

40K □ 50K





AVAILABLE IN TRIAC & 0-10V DIMMING, 120V OR 277V, AND UP TO 1200 LUMENS

OPTIONS • DIMTR-120: Fully dimmable down to 10% of initial light output with standard Triac and Low Voltage dimming option. AND • DIM10-MVOLT(120/277): 0-10V dimming, must be ordered with 0-10V dimming housing. ADDERS: • MANY OTHER OPTIONS ON LUMEN PACKAGE AVAILABLE, PLEASE CONSULT ELITE LIGHTING FOR MORE DETAILS.



LED HOUSING FOR RL SERIES





LD6IC-AT-DIMTR-120

6" New Construction IC Housing for Use with Triac and Low Voltage Electronic Dimming RL600 Series LED Module Lighting Components



C RATED

LD6RIC-AT-DIMTR-120

6" Remodel IC Housing for Use with Triac and Low Voltage Electronic Dimming RL600 Series LED Module Lighting Components





LD5IC-AT-DIMTR-120

5" New Construction IC Housing for Use with Triac and Low Voltage Electronic Dimming RL500 Series LED Module Lighting Components



C RATED

LD5RIC-AT-DIMTR-120

5" Remodel IC Housing for Use with Triac and Low Voltage Electronic Dimming RL500 Series LED Module Lighting Components



LD4IC-AT-DIMTR-120

4" New Construction IC Housing for Use with Triac and Low Voltage Electronic Dimming RL400 Series LED Module Lighting Components



C RATED

LD4RIC-AT-DIMTR-120

4" Remodel IC Housing for Use with Triac and Low Voltage Electronic Dimming RL400 Series LED Module Lighting Components

OPTIONS AND ADDERS:

888

999

- DIMTR-120: Fully dimmable down to 10% of initial light output with standard Triac and Low Voltage dimming option.
- DIM10-MVOLT(120/277): 0-10V dimming, must be ordered with 0-10V dimming housing.
- MANY OTHER OPTIONS ON LUMEN PACKAGE AVAILABLE, PLEASE CONSULT ELITE LIGHTING FOR MORE DETAILS.

LED UNDERCABINET SERIES

EUM-LED LINK BAR SERIES

• Great Performance • Slim Profile •

The Ultra efficient, maintenance free, LED Link luminaire is slim and beautifully contoured in a lowprofile housing, with an anodized aluminum finish. Elite Lighting's LED Link luminaires feature highoutput LEDs in 3000, 4100 and 5000 degrees Kelvin color temperatures. With up to 55 lumensper-watt and 187 lumens-per-foot, it is one of the most energy saving products in the lighting industry. Its rated life of 50,000-hours equals over 10 years of maintenance free operation when operating 12 hours per day. It consumes less than one-eighth the energy of halogen and xenon lighting.

This high output LED technology has no forward projected heat or harmful UV rays, It is California Title 24 compliant. It offers a combination of connector cables and mounting brackets that install at different angles, thus, it provides the highest level of contractor friendly installations.

ACCESSORES.

EUM-LED-ACC-1 - Seamless Inter-Connector EUM-LED-ACC-2 - Flat Mounting Clip EUM-LED-ACC-3 - 45° Mounting Clip EUM-LED-ACC-4 - 12" Extension Coupler EUM-LED-ACC-7 - 18" Power Extension EUM-LED-ACC-8 - 24" Power Extension EUM-LED-HW-12 - 12" Connector EUM-LED-HW-24 - 24" Connector

EUL-LED SERIES

• 1-1/2" LED Undercabinet Lighting •



EUM-LED-6-30K - 6" LED Link Bar EUM-LED-6-41K-6" LED Link Bar

*H***** 3.3 160

EUM-LED-12-30K - 12" LED Link Bar

540

EUM-LED-12-41K - 12" LED Link Bar

6.6 | 大口日東 sec 1 5 8 - 9 | 東田子 EUM-LED-24-30K - 24" LED Link Bar

EUM-LED-24-41K - 24" LED Link Bar # 12 H * === * * # # # M | 9.9

EUM-LED-36-30K - 36" LED Link Bar

EUM-LED-36-41K - 36" LED Link Bar

EUM-LED-48-30K - 48" LED Link Bar **EUM-LED-48-41K - 48" LED Link Bar**

DRIVER

EUM-LED-DRIVER-50W-24V - Ext. Cord Plug-in Driver EUM-LED-DRIVER-24W-24V - Ext. Cord Plug-in Driver EUM-DC-24V-40-120 - 40W 120V Magnetic Driver EUM-DC-24V-60-120 - 60W 120V Magnetic Driver EUM-DC-24V-100-120 - 100W 120V Magnetic Driver EUM-DC-24V-40-277 - 40W 120V Magnetic Driver EUM-DC-24V-60-277 - 60W 120V Magnetic Driver EUM-DC-24V-100-277 - 100W 120V Magnetic Driver

LED-HU SERIES • Surface/Recessed LED Puck •

LED-HU-30-3W-WH-27K



- Aluminum body • 3W LED warm white
- 180 lumens
- Surface or Recessed mounted



- Aluminum body
- •3W LED warm white
- •180 lumens
- •Surface or Recessed mounted
- Includes: 3 fixtures with quick connectors and mounting hardware.
- One 9W LED driver with 6' cord.

PARTNUMBER	WATT	CCT		
o EUL-LED-8-WH 8" LED Undercabinet	2	3000K		
o EUL-LED-16-WH	4	3000K		

PARTINUMBER	WATT	ССТ
 EUL-LED-24-WH 24" LED Undercabinet 	6	3000K
 EUL-LED-32-WH 32" LED Undercabinet 	8	3000K



LED TAPE LIGHT SERIES



INDOOR TAPE LIGHT



- •
- . 1889(2/4
- -
- marc)
- _
-

Features:

- Pre-applied 3M tape allows for fast, hassle free installation
- Field cuttable every 2" or 3 LED's.
- Easy connectors allow for simple plug and play installation.
- UV rays and infrared wavelength are non existent.











LB100SERIES

LB102SERIES

Туре:

- LB102-30F-65K (Cool White)
- LB102-30F-30K (WarmWhite)

Features:

- Pre-applied 3M tape allows for fast, hassle free installation
- Field cuttable every 2" or 3 LED's.
- Easy connectors allow for simple plug and play installation.
- UV rays and infrared wavelength are non existent.



32'
Maximum
Continuousrun



120° View Angle



LB103SERIES

Type:

- LB103-15F-65K (Cool White)
- LB103-15F-30K (Warm White)



Features:

- Pre-applied 3M tape allows for fast, hassle free installation
- Field cuttable every 2" or 3 LED's.
- Easy connectors allow for simple plug and play installation.
- UV rays and infrared wavelength are non existent.



16'
Maximum
Continuous run







LB101SERIES

Type:

LB101-15F-RGB

Electrical:

- Remote control and adapter required.
- RGB tape light controller has 11 different modes and can be con-trolled via a remote control device.

Features:

- Pre-applied 3IM tape allows for fast, hassle free installation
- Field cuttable every 2" or 3 LED's.
- Easy connectors allow for simple plug and play installation.
- UV rays and infrared wavelength are non existent.



16'
Maximum
Continuous run

DC Voltage 100° View Angle



OUTDOOR TAPE LIGHT



- . .
- . .
- . . .
- . .
- . LEDOO-15F-BLUE | | 4 | 16' | 12V

Features:

- Pre-applied 3M tape allows for fast, hassle free installation
- Field cuttable every 2" or 3 LED's.
- Easy connectors allow for simple plug and play installation.
- UV rays and infrared wavelength are non existent.



Maximum Continuous run DC Voltage 140° View Angle



LB200SERIES

LB201SERIES

Type:

LB201-15F-RGB

Electrical:

- Remote control and adapter required.
- RGB tape light controller has 11 different modes and can be con-trolled via a remote control device.

Features:

- Pre-applied 3IM tape allows for fast, hassle free installation
- Field cuttable every 2" or 3 LED's.
- Easy connectors allow for simple plug and play installation.
- UV rays and infrared wavelength are non existent.

















C RATED

EZ6IC-AT 6" Universal IC Housing w/ Loose Socket and Quick Connectors

C RATED

B6IC-AT-W 6" Universal IC Housing



C RATED

B6RIC-AT 6" Universal IC Remodel Housing



C RATED

B26IC-AT-W 6" Universal Shallow IC Housing



C RATED

B26RIC-AT-W 6" Universal Shallow IC Remodel Housing



123, 4.5, 40W A¹⁹) (75W PAR³⁰(75W PAR³⁰(75W PAR³⁰
EZ6IC-AT B6IC-AT-W B6RIC-AT B26IC-AT-W B26RIC-AT-W A19, 65W BR30)

· OUSING COMPATIBILITY



6" INCANDESCENT TRIMS

A19, 65W BR30)

· OUSING COMPATIBILITY:

AF637W-WH Socket Supporting R30/PAR30 Self Flange Air-Shut Baffle AF637P-WH Socket Supporting R30/PAR30 Self Flange Air-Shut Baffle AF640W-WH Socket Supporting R40/PAR38 Self Flange Premium Air-Shut Baffle AF640P-WH Socket Supporting R40/PAR38 Self Flange Premium Air-Shut Baffle

AF632CL-WH Socket Supporting R30/PAR30 Self Flange Air-Shut Reflector



AF632W-WH Socket Supporting R30/PAR30 Self Flange

Air-Shut White Reflector



AF633W-WH Socket Supporting R/PAR30 Open Trim



B603WH R/PAR30 Open Trim



A 180 SA E COMPANIENTY:

B607CL-WH Reflector R/PAR30



(75) **OUSING COMPATIBILITY:** 60WA19,65WBR30)

B608CL-WH Cone Reflector A-19



B631W-WH R40 Premium



B630W-WH Metal Stepped Baffle R30/PAR30



B630P-WH Metal Stepped Baffle R30/PAR30



Eyeball



B609W-WH Regressed Eyeball w/Baffle





B611W-WH AF605WH PAR30 Baffle Socket Supporting WallWash Metal Fresnel Shower Trims



1 2 3 AF601WH

Socket Supporting Metal Albalite Shower Trims



B605WH Metal Fresnel Shower Trims



Metal Albalite Shower Trims



6" SLOPE INCANDESCENT HOUSINGS & TRIMS

МАХІМІІМ

40WA19

· OUSING COMPATIBILITY:



B36IC-AT 6" Slope IC Housing -2/12 to 6/12 Pitch (9° to 27°)



MAXIMUM

40WA19

· OUSING COMPATIBILITY:

B36RIC-AT 6" Slope IC Remodel Housing - 2/12 to 6/12 Pitch (9° to 27°)



B391W-WH PAR30/R30 Stepped Baffle




B391P-WH PAR30/R30 Stepped Baffle

RESIDENTIAL RECESSED LIGHTING

Cone Reflector

Full Cone Baffle

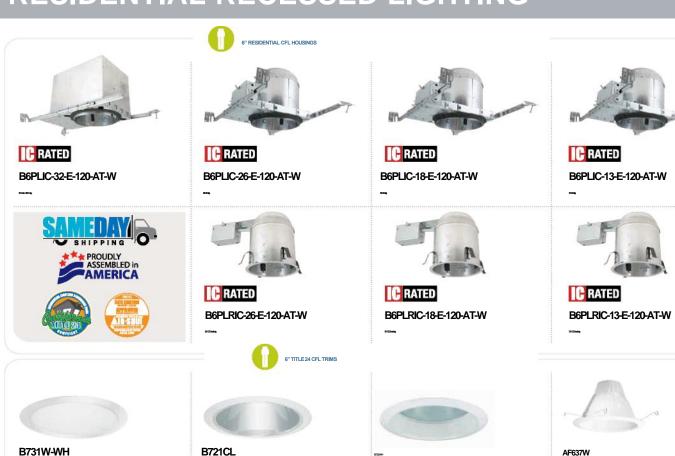



Baffle w/ Frosted Dome

Socket Supporting Self Flange Air-Shut Baffle







4" INCANDESCENT HOUSINGS



C RATED

B4IC-AT 4" Miniature IC Housing



B4-AT 4" Miniature Non-IC Housing



B4R-AT 4" Miniature Non-IC Remodel Housing



4" INCANDESCENT TRIMS



B401W-WH Stepped Baffle



B401P-WH Stepped Baffle



B402CL-WH Reflector



B403WH Eyeball (30° Tilt)



B406W-WH Wall Wash with Baffle Semi-Frosted



B462CL-WH Shower Trim



4" LOW VOLTAGE HOUSINGS



RATED

BL4IC-AT

4" Miniature Low Voltage IC Housing



BL4-75-120 4" Miniature Low Voltage Non-IC Housing



BL4-AT 4" Miniature Low Voltage Non-IC Housing



BL4R-AT 4" Miniature Low Voltage Non-IC Remodel Housing



LED MR16, 12VAC, 8-10W

Equivalent to 40-50W Halogen is available, compatible with series fixtures. VERY SPOT (10°)

FLOOD (36°) NARROW FLOOD (25° SPOT (20°)







LOW VOLTAGE TRIMS



B1401W-WH Stepped Baffle (35° Tilt)



B1401P-WH Stepped Baffle (35° Tilt)



B1402CL-WH Reflector (35° Tilt)



B1406WH Surface Adjustable (90° Tilt, 359° Rot.)



B1411WH Slot Aperture (35° Tilt, 179° Rotation)



B1404W-WH Eyeball (47° Tilt)



B1414W-WH Pinhole with Baffle



B1412W-WH Fully Adjustable (35° Tilt, 359° Rot.)



B1461WH Adjustable Gimbal (40° Tilt)



B1462CL-WH Semi-Frosted Shower Trim

MANY OTHER TRIM OPTIONS AVAILABLE, PLEASE CONSULT ELITE LIGHTING.



SPECIALTY LIGHTING

•T5 Polycarbonate Lens w/ UV Radiation Protection • • T8 Polycarbonate Lens w/ UV Radiation Protection •

PART# DESCRIPTION **EU-12** 12" T5 Undercabinet EU-21 21" T5 Undercabinet

EU-24 24" T5 Undercabinet EU-33 33" T5 Undercabinet EU-42 42" T5 Undercabinet



DESCRIPTION

EZU-18-T8/T12-E 18" CFL T8/T12 Electronic

EZU-24-T8/T12-E 24" CFL T8/T12 Electronic

EZU-36-T12-E 36" CFL T8/T12 Electronic

EZU-48-T12-E 48" CFL T8/T12 Electronic

EZU-36-T8-E 36" CFL T8/T12 Electronic

EZU-48-T8-E 48" CFL T8/T12 Electronic

EUM SERIES

• Great Performance Slim Profile •



EUM-T5-12 12" 8W T5 Mini Undercab.

EUM-T5-22 22" 14W T5 Mini Undercab.

EUM-T5-35 35" 21W T5 Mini Undercab.

EUM-T5-46 46" 28W T5 Mini Undercab.

EUM-T5-58 58" 35W T5 Mini Undercab.

ACCESSORIES DESCRIPTION

EUM-1

EUM-2 6" Flexible wire w/ connector

EUM-4 6' Power cord

EUM-7 Metal coupling clip

EUM-9 Hardwire box



HU-03-3-WH White 3 Light Puck Light Kit



Black 3 Light Puck Light Kit



LiahtPuck LiahtKit



Gold 3 Liaht Puck Liaht Kit



HU-10WH White 120V Puck Light



HU-10BK Black 120V Puck



HU-10CH Chrome 120V Puck Light



HU-10PB Gold 120V Puck Light

TRACK LIGHTING

LOW VOLTAGE TRACK LINE VOLTAGE TRACK CIRCUIT TRACK



ET402 - CYLINDER 50W Cylinder Track Fixture

ET401 - GIMBAL RING

50W Gimbal Ring Track

FINISH WH-White BK - Black

Fixture

FINISH WH-White

BK - Black



ET213-GIMBAL RING 75W PAR30 Gimbal Ring

WH-White BK - Black



ET212-GIMBALRING

50W PAR20 Gimbal Ring



WH-White BK - Black


1 CIRCUIT TRACK

ET-4-WH - 4' Track White

ET-8-WH - 8' Track Black

ET-4-BK - 4' Track White

ET-8-BK - 8' Track Black



ET-101-WH - White Live End Track Connector

ET-101-BK - Black Live End Track Connector

ET-103-WH - White Floating Canopy

ET-103-BK - Black Floating Canopy

ET-107-WH - White Mini Coupling ET-107-BK - Black Mini Coupling

ET-108-WH - White L Connector w/ Power Entry

ET-108-BK - Black L Connector w/ Power Entry



ER1-150-CL

120V Instant Rope Flexilight Clear























BHVR6PL-1X26/32/42-E-MVOLT 6" 26/32/42W Commercial Vertical Fluorescent Housing



6101CL-WH 6" Vertical Clear Reflector



6107CL-WH 6" Vertical Clear Wall Wash Reflector



6104CL-WH 6" Vertical Clear Reflector with Prismatic Lens



6105W-WH 6" Vertical White Baffle with Fresnel Lens

6" COMMERCIAL HORIZONTAL DOWNLIGHT & TRIMS



BHHR6PL-2X26-E-MVOLT 6" 2X26W Commercial Horizontal Fluorescent Housing



6501CL-WH 6" Horizontal Clear Reflector



6507CL-WH 6" Horizontal Clear Wall Wash Reflector



6504CL-WH 6" Horizontal Clear Reflector with Prismatic Lens



6505W-WH 6" Horizontal White Baffle with Fresnel Lens

EXIT SIGN AND EMERGENCY LIGHTING



Red LED Exit Sign with Battery Back-Up



ELX-503-R Red LED Exit Sign with AC Only



ELX-703-R Red LED Exit/Emergency Light Combo w/ Battery Back-up



ELX-LED-735-R Red LED Exit/Emergency Light Combo w/ Battery Back-up



Outdoor Die-Cast Emergency Light w/ Battery Back-up



ELM-809-WH MR16 Emergency Light w/ Battery Back-up



ELM-803-WH Red LED Exit Sign with Battery Back-Up



ELM-LED-860 Adjustable LED Emergency Light







BALLAST

BALLAST-LAMP COMPATIBILITY CHART											
	Max.	LINEAR FLUORESCENT LAMPS				COMPACT FLUORESCENT LAMPS					
Ballast Part # Lumen Output		T5	(W) T5HO (W)		T8 (W) /T8 (U-Bend) / T9 (Circline)		4-Pin CFL (W)		4-Pin Long CFL (W)		
# of Lamps		1 Lamp	2 Lamp	1 Lamp	2 Lamp	1 Lamp	2 Lamp	1 Lamp	2 Lamp	1 Lamp	2 Lamp
BAL-EMG-T8-500	500	•	-	-	-	17-40	-	13-26	-	18-36	-
BAL-EMG-T8-1400	1400	-	-	-	-	17-110	17-40	13-42	13-39	18-55	18-36
BAL-EMG-T8-3000	3000	-	-	-	-	17-215	17-40	-	13-42	18-55	18-36
BAL-EMG-T5-700	700	8, 14	-	-	-	17-40	-	13-39	-	18-36	-
BAL-EMG-T5-1400	1400	-	8-28	39, 54	-	17-125	17-40	13-42	13-39	18-50	18-36
BAL-EMG-T5-3000	3000	-	8-28	-	39, 54	17-125	17-40	-	13-42	18-55	18-50
BAL-EMG-T5HO-1400	1400	-	8-28	39, 54	-	-	17-40	13-42	13-39	-	18-40
BAL-EMG-T5HO-3000	3000	-	8-28	-	39, 54	17-125	17-40	-	13-42	18-55	18-50

FLUORESCENT LIGHTING



SURFACE MOUNT WRAP AROUND

ECONOMY SERIES

2-OEW-2-17-T8-120

Economy 2 Lamp 7" 17W - 2' Wrap Around 120

4-OEW-2-32-T8-120

Economy 2 Lamp 7" 32W - 4' Wrap Around 120

INDUSTRIALSERIES

4-OIW-2-32-T8-MVOLT

Industrial 2 Lamp 9" 32W 4" Wrap Around MVOLT

4-OIW-3-32-T8-MVOLT

Industrial 3 Lamp 9" 32W 4" Wrap Around MVOLT

4-OIW-4-32-T8-MVOLT

Industrial 4 Lamp 9" 32W 4" Wrap Around MVOLT



SURFACE MOUNT CLOUD

4'CLOUDSERIES

4-OSC-2-32T8-E-MVOLT

2 Lamp 32W 4' Cloud

4-OSC-4-32T8-E-MVOLT

4 Lamp32W4' Cloud



STRIP LIGHTING

1 LAMP STRIP SERIES

4-OC-1-32T8-E-MVOLT

1 Lamp 4'32W Open Strip



2LAMP STRIP SERIES

4-OC-2-32T8-E-MVOLT

2 Lamp 4' 32W Open Strip

8-OC-4-32T8-E-MVOLT

4 Lamp 8' 32W Tandem Open Strip

4-OC-WG

4'WireGuard

4 WIEGUAIC



STRIP LIGHTING W/ REFLECTOR

4' & 8' INDUSTRIAL STRIP SERIES

8-OIC-4-32-T8-MVOLT

4 Lamp 32W 8' Strip w/ Reflector

4-OIC-2-32-T8-MVOLT

2 Lamp 32W 4' Strip w/ Reflector





ROUND DRUM SERIES

ROUNDDRUMSERIES

ORS-11-2X13W-120

11"2Lamp2x13WDrum

ORS-11-22W-120

11"1 Lamp 22W Drum

ORS-14-32W-120

14"1 Lamp 32W Drum

ORS-14-54W-120

14"1 Lamp 54W Drum

ORS-19-72W-120

19"1 Lamp 72W Drum





4-LAMP HIGH BAY SERIES

CB4SERIES

CB-4-54-T5HO

Full Body 4-Lamp 54W T5HO High Bay 120/277 & Advance Cool Running Ballast

CB-4-32-T8

Full Body 4-Lamp 32W T8 High Bay 120/277

CB-4-54-T5HO-GL41K

Full Body 4-Lamp 54W T5HO High Bay 120/277 & Advance Cool Running Ballast & 841 Lamps

CB-4-32-T8

Full Body 4-Lamp 32W T8 High Bay 120/277 & 741 Lamps



6-LAMP HIGH BAY SERIES

CB6SERIES

CB-6-54-T5HO

Full Body 4-Lamp 54W T5HO High Bay 120/277 & Advance Cool Running Ballast

CR-6-32-T8

Full Body 4-Lamp 32W T8 High Bay 120/277

CB-6-54-T5HO-GL41K

Full Body 4-Lamp 54W T5HO High Bay 120/277 & Advance Cool Running Ballast & 841 Lamps

CB-6-32-T8

Full Body 4-Lamp 32W T8 High Bay 120/277 & 741 Lamps

ACCESSORIES FOR HIGH BAY

CB4-WG 4-LampCool Beam Wire Guard - Screw Down CB6-WG 6-LampCool Beam Wire Guard - Screw Down CB4-HG 4-LampCool Beam Wire Guard - Hinged w/ Door Frame CB6-HG 6-LampCool Beam Wire Guard - Hinged w/ Door Frame CB4-CL 4-LampCool Beam Clear Lens & Door CB6-CL 6-LampCool Beam Clear Lens & Door CB4-PL 4-LampCool Beam Prismatic Lens & Door CB6-PL 6-LampCool Beam Prismatic Lens & Door

ACCESSORIES FOR HIGH BAY **CB-CHAIN** 4 Hooks, 10' Chain ĠSS Set of 10' Gripple Aircraft Cable PCSB Straight Blade 120 V Plug PCTL-120 120V3-WireNEMA5-15AmpPlug PCTL-277 277V3-Wire NEMA 5-15 Amp Plug МН MountingHub MS Motion Sensor Electronic Program Start Ballast for T8/per Ballast



VAPOR TIGHT SERIES

VAPORTIGHT SERIES

4-OWVS-2-32-T8-E-MVOLT 2 Lamp 32W T8 4' Vapor Tight

4-OWVS-2-54-T5HO-E-MVOLT 2 Lamp 54W T5HO 4' Vapor Tight







