

# NITE OWL Battery Unit

## Thermoplastic



### Features

- Injection-molded thermoplastic housing
- Innovative, snap together design allows for fast installation
- Replaceable lead-calcium ( 6v 4.5AH ) battery
- Universal 120/347 AC input
- Two adjustable glare free light heads
- Uses halogen MR16 lamps with front glass cover
- CSA C22.2 No. 141 certified
- Test switch and charge rate indicators
- Standard model comes with two 5.4 watts MR16 heads
- Emergency mode: min. 90 minutes



### Typical Specification

The Contractor will install the Lumacell NH362MH Battery unit. The emergency lighting system shall consist of fully automatic equipment with 2 MR16 glare free halogen heads. Each unit shall contain a fully automatic, solid state charger with test switch and AC on pilot lights.

The unit shall contain a sealed transfer circuit and low voltage disconnect circuit. The battery shall be 6 volts with a capacity of 29 watts for 30 minutes.

The unit shall be CSA C22.2 no 141.


The unit shall be Lumacell model:  
\_\_\_\_\_.

Project/Location		Date
Contractor		Prepared by
LUMACELL Model		



## NITE OWL SERIES

### Dimensions

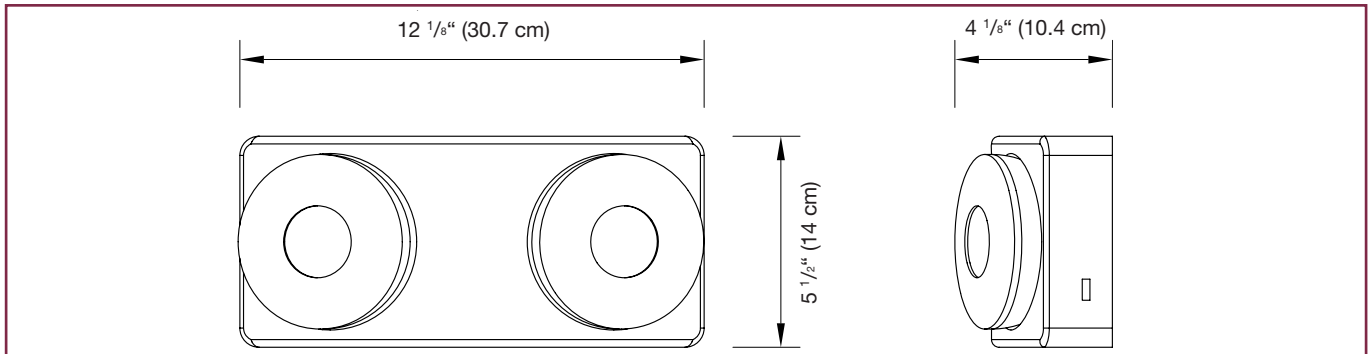

### Wire Guard

460.0100-L Wall or Ceiling Mount

### Power Consumption and Unit Rating

Model	AC Specs			DC Specs	
<b>NH362MH</b>	120/347V a.c.	0.06/0.03 Amp	Less than 6W	6V - 10.8W	Min. 90 minutes
<b>NH362MH-10W</b>	120/347V a.c.	0.06/0.03 Amp	Less than 6W	6V - 20W	Min. 30 minutes

### Replacement Lamps

Ordering Code	Lamp Type	Voltage-Wattage
580.0072-L	MR16	6V-5W
580.0079-L	MR16	6V-10W

### Ordering Information

Series	Unit Capacity	AC Voltage	# of Lamps/Type	Options
<b>NH</b>	<b>36=</b> 6V - 29W	<b>Blank=</b> 120/347 Vac	<b>2MH=</b> two 5.4 watts MR16 lamps (standard)	<b>Blank=</b> no options <b>-10W=</b> 10Watts MR16 lamps

**EXAMPLE: NH362MH**