

Complete fixture consists of Reflector Trim & Frame-In Kit. Select each separately

Reflector Trim	Frame-In Kit	Lamp
376WHX White Frosted Glass and White Flange	Remodeler 300MRSPX Remodeler 3401MREX Non-IC 302MRSPX Non-IC 302MREX IC 302MRIC9SPX AirSeal IC 302MRAICSPX AirSeal IC 302MRAICEX	50W MR16 50W MR16 50W MR16 50W MR16 50W MR16 50W MR16 50W MR16

Features

1. **Housing:** 25ga galvanized steel.
2. **Residence Mounting Clip:** Factory-installed; zinc plated spring steel; free-hand installation.
3. **Flange:** Die-cast aluminum .060" (1.5mm) thick; white finish.
4. **Glass:** Frosted glass.
5. **Gasket:** Seal unit for shower applications.
6. **Lampholder Support:** 27ga. steel.
7. **Mounting Clips (3):** 24ga. spring steel, zinc plated.
Provide easy snap-in / snap-out action.

Frame-In Kit

Note: For complete Frame-In Kit specifications, see 300 frame specification sheets


Labels

CSA, UL Suitable for damp and wet locations.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

(FC) is initial footcandle at center of beam.
Beam length (L) and beam width (W) are to where the candlepower is reduced to 50% of center beam candlepower.
CBCP is center beam candlepower.
(C) is distance to the center of the beam.

Lamp data shown is typical, and is based on bare lamp photometrics. Contact lamp manufacturers for availability and performance.

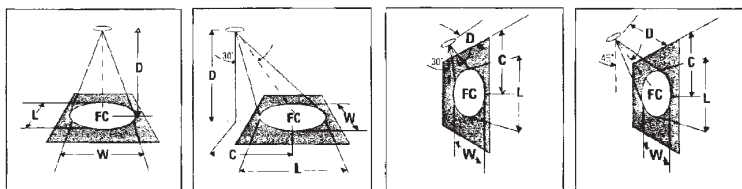

Lamps	Beam Spread (To 50% CBCP)	CBCP	Rated Lbs (Hrs.)	0° AIMING ANGLE				30° AIMING ANGLE				30° AIMING ANGLE				45° AIMING ANGLE					
				D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W		
MR-16 LOW VOLTAGE HALOGEN BI-PIN LAMPS																					
20W MR-16 VNSP (LZX)	7°	8200	3000	7' 167	0.9'	0.2'	10' 82	1.2'	1.2'	6' 5.5'	148	1.0'	0.8'	2' 5.5'	256	1.0'	0.9'	4' 4.0'	181	1.0'	0.7'
20W MR-16 NSP (ESX)	13°	3600	3000	6' 100	1.4'	1.4'	8' 56	1.8'	1.8'	5' 2.9'	94	1.5'	1.3'	2' 3.5'	113	1.3'	0.9'	3' 3.0'	141	1.4'	1.0'
20W MR-16 FL (BAB)	40°	525	4000	10' 36	2.3'	2.3'	12' 25	2.7'	2.7'	7' 4.0'	48	2.1'	1.8'	3' 5.2'	10	2.8'	1.4'	5' 5.0'	51	2.3'	1.6'
35W MR-16 NSP (FPB)	12°	8700	4000	2' 131	1.5'	1.5'	3' 58	2.2'	2.2'	2' 1.2	85	2.0'	1.7'	1' 1.7'	66	4.8'	1.5'	2' 2.0'	46	3.4'	2.1'
35W MR-16 SP (FRA)	23°	3900	4000	4' 33	2.9'	2.9'	5' 21	3.5'	3.6'	3' 1.7	38	3.0'	2.5'	2' 3.5	16	5.7'	2.9'	3' 3.0'	21	5.0'	3.1'
35W MR-16 FL (FMW)	40°	1600	4000	7' 178	1.5'	1.5'	10' 87	2.1'	2.1'	6' 3.5	157	1.7'	1.5'	3' 5.2	212	1.7'	0.8'	4' 4.0'	192	1.7'	1.2'
37W MR-16 IR (NSP)	10°	11500	4000	8' 61	2.8'	2.8'	12' 51	2.7'	2.7'	7' 4.0	52	3.3'	2.9'	3' 5.2	54	4.7'	2.1'	5' 5.0	55	3.6'	2.5'
37W MR-16 IR (NFL)	25°	3500	4000	10' 39	3.5'	3.5'	16' 34	5.4'	5.4'	9' 5.2	21	4.3'	3.7'	4' 6.9	30	6.2'	2.8'	7' 7.0	28	5.1'	3.5'
37W MR-16 IR (FL)	40°	2052	4000	6' 44	4.4'	4.4'	8' 25	5.8'	5.8'	3' 1.7	115	3.6'	2.5'	1' 1.7	200	4.8'	1.5'	3' 3.0'	63	5.0'	3.1'
42W MR-16 VNSP (LZY)	9°	13,100	3500	10' 16	7.3'	7.3'	12' 80	2.1'	2.1'	5' 2.9	42	5.1'	4.2'	2' 3.5	64	9.7'	2.9'	4' 4.0	56	6.7'	4.1'
42W MR-16 NFL (EYS)	27°	2400	4000	6' 57	4.4'	4.4'	8' 37	5.8'	5.8'	7' 4.0	27	7.1'	5.9'	3' 5.2	29	14.5'	4.4'	5' 5.0	26	8.4'	5.1'
50W MR-16 NSP (EXT)	14°	10,200	4000	10' 21	7.5'	7.5'	12' 29	3.5'	3.5'	9' 5.2	15	9.1'	7.6'	4' 6.9	15	19.3'	5.8'	6' 6.0	20	10.1'	6.2'
50W MR-16 NFL (EKZ)	27°	3400	4000	6' 94	2.9'	2.9'	8' 53	3.8'	3.8'	5' 2.9	88	3.3'	2.8'	2' 3.5	106	4.6'	1.9'	3' 3.0'	134	3.1'	2.0'
50W MR-16 FL (EXN)	40°	1850	4000	10' 34	4.8'	4.8'	12' 24	5.8'	5.8'	7' 4.0	45	4.6'	3.9'	3' 5.2	47	11.0'	4.8'	5' 5.0	48	5.1'	3.4'
50W MR-16 WFL (FNV)	55°	1150	4000	4' 116	2.8'	2.8'	6' 51	4.4'	4.4'	3' 1.7	134	3.0'	2.5'	1' 1.7	231	4.8'	1.5'	3' 3.0'	73	5.0'	3.1'
73W MR-16 SP	10°	14030	4000	8' 29	5.8'	5.8'	12' 91	1.9'	1.9'	5' 2.9	48	5.1'	4.2'	2' 3.5	58	9.7'	2.9'	4' 4.0	41	6.7'	4.1'
73W MR-16 FL	36°	2500	4000	10' 19	7.3'	7.3'	12' 71	2.9'	2.9'	7' 4.0	35	3.3'	2.8'	3' 5.2	26	14.5'	4.4'	5' 5.0	26	8.4'	5.1'
75W MR-16 NSP (EYF)	4°	12,000	4000	8' 156	2.9'	2.9'	12' 23	3.8'	3.8'	5' 2.9	88	3.3'	2.8'	2' 3.5	106	4.6'	1.9'	3' 3.0'	134	3.1'	2.0'
75W MR-16 NFL (EYJ)	25°	4900	4000	10' 34	4.8'	4.8'	12' 24	5.8'	5.8'	7' 4.0	45	4.6'	3.9'	3' 5.2	47	11.0'	4.8'	5' 5.0	48	5.1'	3.4'
75W MR-16 FL (EYK)	42°	2100	4000	4' 126	3.1'	3.1'	6' 57	4.4'	4.4'	3' 1.7	134	3.0'	2.5'	1' 1.7	231	4.8'	1.5'	3' 3.0'	73	5.0'	3.1'
50W MR-16 NSP	11°	10,500	3500	5' 46	5.2'	5.2'	8' 77	3.5'	3.5'	5' 2.9	30	7.6'	6.0'	2' 3.5	36	44.5'	4.2'	3' 3.0'	45	8.6'	4.4'
50W MR-16 NFL	25°	3000	3500	7' 23	7.3'	7.3'	10' 33	5.1'	5.1'	7' 4.0	15	10.7'	8.4'	3' 5.2	16	66.8'	6.2'	4' 4.0	25	11.4'	5.9'
50W MR-16 FL	40°	1900	3500	8' 14	9.4'	9.4'	10' 19	7.3'	7.3'	9' 5.2	9	13.7'	10.6'	4' 6.9	9	89.1'	6.2'	5' 5.0	16	14.3'	7.4'
MR-16 HALOGEN LOW VOLTAGE BI-PIN LAMPS WITH ALUMINIZED (NON-DICHRIC) REFLECTORS																					
50W MR-16 NSP	11°	10,500	3500	8' 164	1.5'	1.5'	12' 73	2.3'	2.3'	7' 4.0	159	1.8'	1.6'	3' 5.2	146	2.4'	1.2'	5' 5.0	148	1.9'	1.4'
50W MR-16 NFL	25°	3000	3500	10' 34	4.8'	4.8'	12' 24	5.8'	5.8'	7' 4.0	45	4.6'	3.9'	3' 5.2	47	11.0'	4.8'	5' 5.0	48	5.1'	3.4'
50W MR-16 FL	40°	1900	3500	4' 131	3.1'	3.1'	6' 58	4.6'	4.6'	3' 1.7	152	3.2'	2.7'	1' 1.7	283	5.5'	1.5'	3' 3.0'	62	5.4'	3.3'

Job Information **Type:**