


Incandescent Lamps



Watts	Bulb	Base	Product Number 046677-	Ordering Code	Volts	Pkg. Qty.	Description	Class and Filament	LCL (In.)	MQL (In.)	Approximate		Lumens
											Hours Life	MBCP*	
50 100 150	A-21	3Ct. Med. ▲	31739-6	50/150A/STP/PK 8/1	120	8	Pink softone Pastel® Three-Way(8)	C, 2CC-8		5 ⁵ / ₁₆	1200		550 1310 1860
50 200 250	A-21	3Ct. Med. ▲	20454-5	50/250A/WL 12/1	120	12	Longer Life Soft White Three-Way(8)	C, 2CC-8		5 ⁵ / ₁₆	1500		575 3250 3825
51	A-19	Med. ☐ \$\$\$	20553-4	51A19/RR/TS	120	20	Clear, Ring Refl. Traffic Sig	C, C-7A	2 ⁷ / ₁₆	3 ³ / ₄	8000		390
		☐ \$\$\$	31756-0	51A19/RR/TS	125	20	Clear, Ring Refl. Traffic Sig.	C, C-7A	2 ⁷ / ₁₆	3 ³ / ₄	8000		385
		☐ \$\$\$	20555-9	51A19/RR/TS	130	20	Clear, Ring Refl. Traffic Sig	C, C-7A	2 ⁷ / ₁₆	3 ³ / ₄	8000		380
52	A-19	Med. ▲ \$\$\$	22237-2	60A-52A/EW	120	48	Frost, Econ-o-watt®	C, CC-6		4 ⁷ / ₁₆	1000		700
		◆ \$\$\$	22239-8	60A-52A/EW	130	48	Frost, Econ-o-watt	C, CC-6		4 ⁷ / ₁₆	1000		680
		* \$\$\$	37459-5	60A-52A/99/EW	120-130	48	Frost, Econ-o-watt, Ext. Sv.	C, CC-6		4 ⁷ / ₁₆	2500		605
54	A-19	Med. \$\$\$	37166-6	K54A19/TS/EW	120-125	120	Clear, Krypton Econ-o-watt Traffic Signal (12)	C, C-11V	2 ⁷ / ₁₆	4 ³ / ₈	8000		530
60	A-19	Med. ▲	27082-7	60A 12/4	120	48	Frost	C, CC-8		4 ⁷ / ₁₆	1000		890
		◆	37469-4	60A	120	48	Frost	C, CC-6		4 ⁷ / ₁₆	1000		890
		◆	37471-0	60A	130	48	Frost (E-Frost)	C, CC-6		4 ⁷ / ₁₆	1000		850
		◆	30038-4	60A/TF	120	120	Frost Silicone Coated	C, CC-6		4 ⁷ / ₁₆	1000		
		◆	22245-5	60A/99	120	48	Frost, Extended Service	C, CC-8		4 ⁷ / ₁₆	2500		800
		◆	22246-3	60A/99	130	48	Frost, Extended Service	C, CC-8		4 ⁷ / ₁₆	2500		790
	Med.	☐	22247-1	60A19/35	120	48	Frost, Industrial Service	C, C-9		4 ⁷ / ₁₆	3500		600
		◆ ☐	22248-9	60A19/35	130	48	Frost, Industrial Service	C, C-9		4 ⁷ / ₁₆	3500		585
		☐	25836-8	60A/35/TF	120	60	Frost Silicone Coated, Industrial Service	C, C-9		4 ⁷ / ₁₆	3500		
	Med. ▲	◆	20148-3	60A/CL 12/2	120	24	Clear	C, CC-6	3 ¹ / ₈	4 ⁷ / ₁₆	1000		855
		◆	37522-0	60A/CL	130	48	Clear	C, CC-8	3 ¹ / ₈	4 ⁷ / ₁₆	1000		880
		◆	36292-1	60A/AGRO 24/1	120	24	Agro-Lite Plant Light	C, C-9		4 ⁷ / ₁₆	1000		
		◆	22086-3	60A/D	120	120	Frost, Daylight	C, CC-6		4 ⁷ / ₁₆	1000		515
		◆	37517-0	60A/Y	120-130	48	Yellow, Bug-A-Way®	C, CC-6		4 ⁷ / ₁₆	1350		
		◆	22099-6	60A19/B	120	60	Blue	C, C-9		4 ⁷ / ₁₆	1000		
		◆	22102-8	60A19/G	120	60	Green	C, C-9		4 ⁷ / ₁₆	1000		
		◆	22106-9	60A19/R	120	60	Red	C, C-9		4 ⁷ / ₁₆	1000		
		◆	23941-8	60A/SB	120	120	Frost, Silvered Bowl(43)	C, CC-6		4 ⁷ / ₁₆	1000		810
	Med.	\$\$\$	21056-7	K60A19/TS/EW	120-125	120	Clear, Krypton Econ-o-watt Traffic Signal (12)	C, C-11V	2 ⁷ / ₁₆	4 ³ / ₈	8000		610

☐ Exclusive Philips Product

\$\$\$ — Energy Saving Product

*Maximum Beam Candlepower


* ◆ For more information when operated at 120V see pages 45-47

▲ Aluminum Base

Footnotes located on page 47

Incandescent Lamps

Incandescent LAMPS

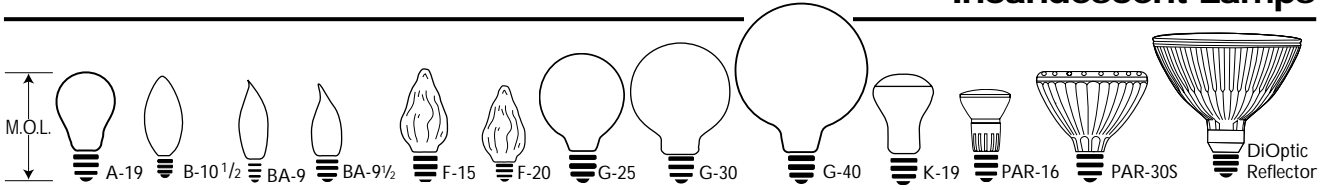

Watts	Bulb	Base	Product Number 046677-	Ordering Code	Volts	Pkg. Qty. *	Description	Class and Filament	L.C.L. (In.)	M.O.L. (In.)	Approximate		Lumens
											Hours Life	MBCP*	
60	A-19	Med.	\$\$\$ 37167-4	K60A19/TS/EW	130	120	Clear, Krypton Econ-o-watt® Traffic Signal (12)	C, C-11V	2 ⁷ / ₁₆	4 ³ / ₈	8000		610
			Med. ▲	28111-3	60A	230	120	Frost	C, RC-9	3 ¹⁵ / ₁₆	1000		545
	B-10 1/2	Cand.	31116-7	60B10 1/2/4M	120	25 BX	Clear, Blunt Tip	C, C-7A	4 ¹ / ₁₆	4000			
			Cand.▲	32969-8	BC-60B10 1/2/LL	6/2	120	12	Clear, Long Lf., Blunt Tip(12)	C, CC-2V	4 ¹ / ₁₆	2000	
	BA-9	Cand.	23195-1	BC-60BA9C/LL	6/2	120	12	Clear, Long Lf., Bent Tip(12)	C, CC-2R	4 ³ / ₁₆	2000		
			27804-4	BC-60BA9C/LL/4	6/4	120	24	Clear, Long Lf., Bent Tip(12)	C, CC-2R	4 ³ / ₁₆	2000		
			22206-7	BC-60BA9C/FLL	6/2	120	12	Frost, Long Lf., Bent Tip(12)	C, CC-2R	4 ³ / ₁₆	2000		
			31095-3	60BA9C/4M	120	25 BX	120	6	Clear, Bent Tip	C, C-7A	4 ³ / ₁₆	4000	
	BA-9 1/2	Med.	31099-5	60BA9 1/2/4M	120	25 BX	Clear, Bent Tip(8)	C, C-7A	4 ⁷ / ₁₆	4000			
			32962-3	BC-60BA9 1/2/LL	6/2	120	12	Clear, Long Lf., Bent Tip(12)	C, CC-2V	4 ¹ / ₁₆	2000		
			32963-1	BC-60BA9 1/2/FLL	6/2	120	12	Frost, Long Lf., Bent Tip(12)	C, CC-2V	4 ¹ / ₁₆	2000		
	F-15	Med. ▲	32973-0	BC60F15/LL	6/2	120	12	Clear, Long Lf., Flame(12)	C, C-9	4 ¹ / ₂	2000		
	F-20	Med.	29002-3	60F20/POST LT	6/1	120	6	Clear, Post Light	C,C-9	5	3500		
	G-25	Med. ▲	25046-4	60G25	12/1	120	12	Clear, Globe	C, C-9	4 ⁷ / ₁₆	1500		
			25050-6	60G25	4/3	120	12	Clear, Globe	C, C-9	4 ⁷ / ₁₆	1500		
			25049-8	60G25/W	12/1	120	12	White, Globe	C, C-9	4 ⁷ / ₁₆	1500		
			25051-4	60G25/W	4/3	120	12	White, Globe	C, C-9	4 ⁷ / ₁₆	1500		
	G-30	Med.	28141-0	60G30/4MW	6/1	120	6	White, Globe	C, C-9	5 ¹ / ₂	4000		
	G-40	Med. ▲	20202-8	60G40/4M	6/1	120	6	Clear, Globe	C, C-9	6 ¹⁵ / ₁₆	4000		
			20201-0	60G40/4MW	6/1	120	6	White, Globe	C, C-9	6 ¹⁵ / ₁₆	4000		
			22486-5	60K19/DL	6/2	120	12	Director®	C, CC-6	4 ¹ / ₈	1150		770
	PAR-16	Med.	☐\$\$\$ 33004-3	60PAR16/HAL/NSP10	120	15	N. Spot 10 Deg.(42)(86)	C, CC-8	3 ¹ / ₈	2000	7500	580	
			☐\$\$\$ 33005-0	60PAR16/HAL/NSP10	130	15	N. Spot 10 Deg.(42)(86)	C, CC-8	3 ¹ / ₈	2000	7500	580	
			☐\$\$\$ 33006-8	60PAR16/HAL/NFL27	120	15	N. Flood 27 Deg.(86)	C, CC-8	3 ¹ / ₈	2000	2000	580	
			☐\$\$\$ 33007-6	60PAR16/HAL/NFL27	130	15	N. Flood 27 Deg.(86)	C, CC-8	3 ¹ / ₈	2000	2000	580	
			☐\$\$\$ 21388-4	BC60PAR16/HAL/NSP	6/1	120	6	N. Spot 10 Deg.(42)(86)	C, CC-8	3 ¹ / ₈	2000	7500	580
			☐\$\$\$ 21390-0	BC60PAR16/HAL/NFL	6/1	120	6	N. Flood 27 Deg.(42)(86)	C, CC-8	3 ¹ / ₈	2000	2000	580
	PAR-30S	Med.	ⓔ☐\$ 35751-7	60PAR30S/HAL/NSP10	120	15	N. Spot 10 Deg.(86)	C, CC-8	3 ³ / ₈	2500	10,000	800	
			ⓔ♦☐\$\$\$ 35752-5	60PAR30S/HAL/NSP10	130	15	N. Spot 10 Deg.(86)	C, CC-8	3 ³ / ₈	2500	10,000	800	
			ⓔ☐\$\$\$ 35753-3	60PAR30S/HAL/NFL30	120	15	N. Flood 30 Deg.(86)	C, CC-8	3 ³ / ₈	2500	3300	800	
			ⓔ♦☐\$\$\$ 35788-9	60PAR30S/HAL/NFL30	130	15	N. Flood 30 Deg.(86)	C, CC-8	3 ³ / ₈	2500	3300	800	
			ⓔ☐\$\$\$ 35758-2	60PAR30S/HAL/FL40	120	15	Flood 40 Deg.(86)	C, CC-8	3 ³ / ₈	2500	1850	800	
			ⓔ♦☐\$\$\$ 35762-4	60PAR30S/HAL/FL40	130	15	Flood 40 Deg.(86)	C, CC-8	3 ³ / ₈	2500	1850	800	
	PAR-38	Med. Skt.	ⓔ☐\$ 23059-9	60PAR38/HAL/SP10/WLL	120	12	Spot 10 Deg.(86)	C, CC-8	5 ⁵ / ₁₆	3000	18,000	880	
			ⓔ♦☐\$ 23309-8	60PAR38/HAL/SP10/WLL	130	12	Spot 10 Deg.(86)	C, CC-8	5 ⁵ / ₁₆	3000	18,000	880	
			ⓔ☐\$\$\$ 23062-3	60PAR38/HAL/WSP12/WLL	120	12	W. Spot 12 Deg.(86)	C, CC-8	5 ⁵ / ₁₆	3000	13,500	880	
			ⓔ♦☐\$\$\$ 23330-4	60PAR38/HAL/WSP12/WLL	130	12	W. Spot 12 Deg.(86)	C, CC-8	5 ⁵ / ₁₆	3000	13,500	880	
			ⓔ☐\$\$\$ 23065-6	60PAR38/HAL/FL28/WLL	120	12	Flood 28 Deg.(86)	C, CC-8	5 ⁵ / ₁₆	3000	3600	880	
			ⓔ♦☐\$\$\$ 23356-9	60PAR38/HAL/FL28/WLL	130	12	Flood 28 Deg.(86)	C, CC-8	5 ⁵ / ₁₆	3000	3600	880	

☐ Exclusive Philips Product

\$\$\$ — Energy Saving Product

BX — Boxed

♦ For more information when operated at 120V see pages 45-47

*Maximum Beam Candlepower

▲ Aluminum Base

Footnotes located on page 47

