


CSA Approved for Wet Locations

Available up to 150 Watt High Pressure Sodium; 175 W Metal Halide


SPECIFICATIONS:

- One-piece die-cast aluminum housing and lens frame. Lens frame fully gasketed, hinged and secured with two stainless steel screws for weatherproofing and easy two-handed service. Standard finish is Duraplex II™ Bronze Electrostatic Powder coat.
- Clear, tempered, shock and heat resistant glass, permanently sealed to lens frame.
- Three piece reflector system, available in a specular or diffuse finish, provides a wide (NEMA 7x7) beam distribution.
- Available in 3 mounting configurations:
 - Arm Mount:** 1/2" NPT die-cast aluminum arm with cast in degree marks for aiming.
 - Wall Mount:** "L" shaped, die-cast aluminum construction (Standard with 3ft SOW 16/3 cable).
 - Yoke Mount:** Heavy gauge aluminum construction (Standard with 3ft SOW 16/3 cable).
- Porcelain, 4 kV pulse rated, grip-type medium based socket prevents lamp loosening.
- EPA:** Effective Projected Area = 0.60 ft² [0.056 m²]
- Comes with 3 year limited warranty.

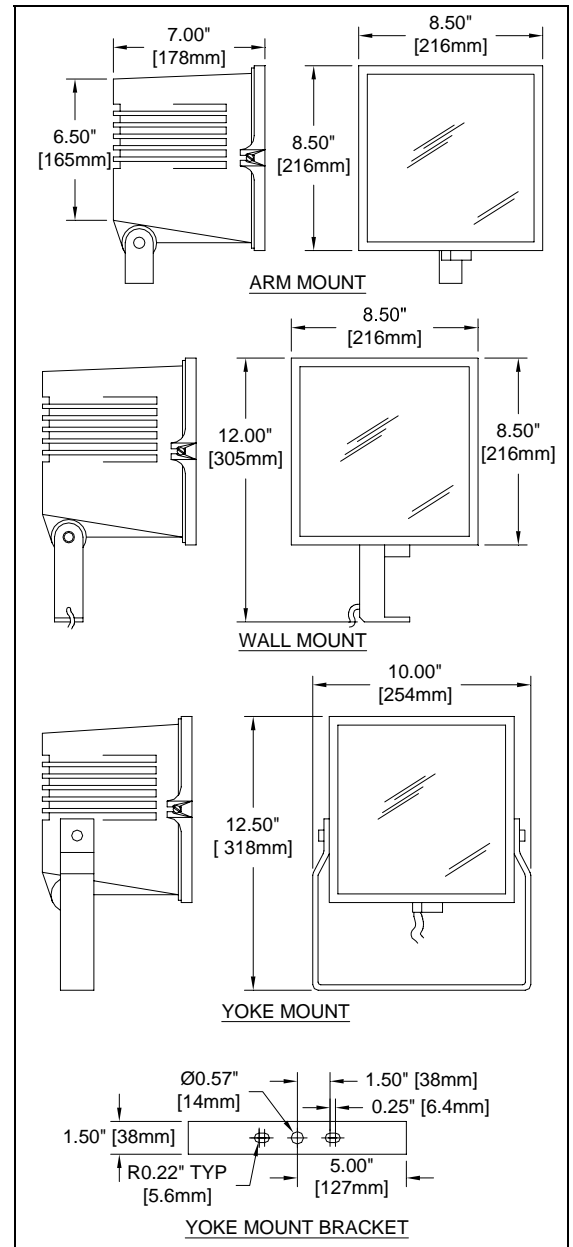

ORDERING GUIDE:

Example: **MRY100DMAL-TW**



Series	Mounting Type	Lamp Wattage ¹	Reflector Type ³	Light Source ²	Lamp Included	Voltage ^{4,5}	Finish ⁶
MR : Miniray	A : Arm Mount W : Wall Mount Y : Yoke Mount	050 : 50W 070 : 70W 100 : 100W 150 : 150W 175 : 175W	D : Diffuse Reflector S : Specular Reflector	MA : Metal Halide NLX : High Pressure Sodium (Reactor Ballast) LX : High Pressure Sodium (HPF Ballast)	L : Yes Blank : No	1: 120V 2: 208V 3: 240V 4: 277V 6: 347V T: Tri-Tap (120/277/347V)	Blank : Bronze W : White B : Black G : Grey

¹ MA (50, 70, 100, 150, 175W); NLX (50, 70, 100, 150W); LX (50, 70, 100, 150W)

³ Diffuse reflector is standard with clear lamp for outdoor applications. Change "D" to "S" for specular reflector with phosphor coated lamp for indoor use.

⁴ MA (50-150W), NLX (50-150W) are not available in 208V or 240V.

⁶ For other housing finishes, consult factory for available colours and colour codes.

² NLX Reactor Ballast only available in 120V.

⁵ LX (50W) not available in 480V, 600V or Tri-Tap.

PROJECT: _____

TYPE: _____

CATALOGUE NUMBER: _____