

MasterColor CDM ED17 Elite 4200K

MasterColor CDM 70W BD17 CO U ELITE/4K

MasterColor Elite Ceramic Metal Halide ED-17 4200K Lamps provide excellent lumen maintenance and outstanding performance over time in the familiar ED-17 lamp shape.



Product data

• General Characteristics

Base	Medium [Single Contact Medium Screw]
Base Information	Brass [Brass Base]
Bulb	BD17
Bulb Material	Hard Glass
Bulb Finish	Coated
Operating Position	Universal [Any or Universal (U)]
Main Application	General Lighting
RatedAvgLife(See Family Notes)	20000 hr

Lamp Voltage	95 V
Lamp Current	0.91 A
Ignition Time	30 (max) s
Re-ignition Time [min]	8 (max) min

• Environmental Characteristics

Mercury (Hg) Content	7.1 (max) mg
Picogram per Lumen Hour	76 p/LuHr

• Light Technical Characteristics

Color Code	842 [CCT of 4200K]
Color Rendering Index	85 (min), 88 (nom) Ra8
Color Designation	Cool White
Color Temperature	4200 K
Color Temperature technical	4400 K
Initial Lumens	6200 Lm
Luminous Efficacy	89 Lm/W
Lamp EM	-
Lumen Maintenance - 10% life	90 %
Lumen Maintenance - 40% life	80 %
Design Mean Lumens	4960 Lm
Chromaticity Coordinate X	0.361 (min), 0.370 (nom), 0.379 (max)
Chromaticity Coordinate Y	0.356 (min), 0.362 (nom), 0.368 (max)

• UV-related Characteristics

Damage Factor D/fc	0.6 -
PET (NIOSH)	95 h500lx
UV A	23.3 mW/cm ²
UV B	0.2 mW/cm ²
UV C	0 mW/cm ²

• Luminaire Design Requirements

Cap-Base Temperature	190 (max) C
Bulb Temperature	400 (max) C

• Product Dimensions

Max Overall Length (MOL) - C	5.438 (max) in
Diameter D	2.125 in

• Electrical Characteristics

Watts	70 W
-------	------

• Product Data

Product number	429910
----------------	--------

PHILIPS

MasterColor CDM ED17 Elite 4200K

Full product name MasterColor CDM 70W BD17 CO U ELITE/4K
Short product name MHC70/C/U/M/4K ELITE
Pieces per Sku 1
eop_pck_cfg 12


Skus/Case 12
Bar code on pack 46677429911
Bar code on case 50046677429916
Logistics code(s) 928601177501
eop_net_weight_pp 0.001 kg

Warnings and Safety

- R "WARNING: These lamps can cause serious skin burn and eye inflammation from short wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will

remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available." This lamp complies with FDA radiation performance standard 21 CFR subchapter J. (USA:21 CFR 1040.30 Canada: SOR/DORS/80-381)

Dimensional drawing

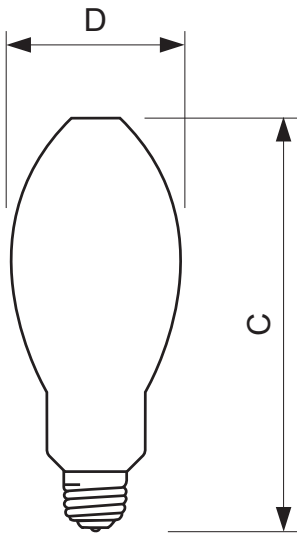

E26

MasterColor CDM 70W BD17 CO U ELITE/4K

Product	C (Max)	D (Norm)
MHC 70W/842 E26 BD17 CO U ELITE	5.438	2.125



© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, August 29
data subject to change