

LC-CRTL-DIM-1

Smart Wi-Fi Dimmer
Control Devices



Job Information		
Project Name		Type
Location		
Quantity		Date
Contact/Phone		
Notes		

Features

Body

Durable polycarbonate body with snap-on faceplate.

Performance

The smart Wi-Fi dimmer provides a maximum output of 400W for incandescent bulbs and 150W for fluorescent and LED bulbs.

Operation

Features an ON/OFF press and a 7 level touch slider for dimming functionality.

Radio Frequency

Certified IEEE 802.11 b/g Wi-Fi 2.4Ghz radio.

Easy Installation

The smart Wi-Fi dimmer installs just like a regular dimmer. Replaces single pole switches (not compatible with 3-way switches). Neutral wire required.

WiZ App

The smart Wi-Fi dimmer is can be controlled via the WiZ app (works with iOS and Android) from anywhere. Voice control can also be achieved by integrating the app with most smart speakers. Works with Google Assistant, Siri, Alexa and IFTTT.


Operating Temperature

-5°C~45°C (23°F~113°F)

Environment


- Dry locations only.
- Suitable for indoor use only.

SPECIFICATION	
Approved Location	Dry / Indoor
Input Voltage	120Vac - 60 Hz
Certification	cULus
Maximum Output	Incandescent: 400W Fluorescent: 150W LED: 150W
Maximum Power	400W
Output Current	3.3A
Standby Power	0.5W
Wireless Frequency	2.4GHz
Wireless Standard	IEEE 802.11 b/g
Warranty	1-Year

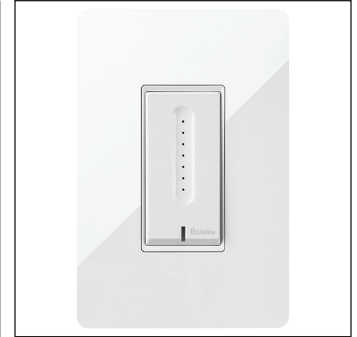

Description

The OnCloud Smart Wi-Fi Dimmer works with any 120V dimmable bulb or fixture. Works in single pole applications.

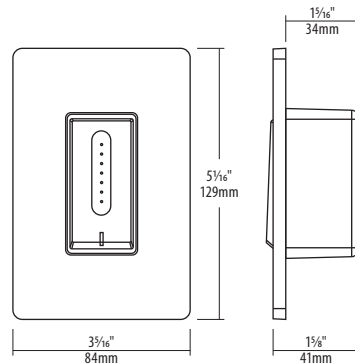

Notes: Accessories are sold separately. For additional options please consult your Liteline representative.

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Ordering Guide



LC-CRTL-DIM-1
Smart Wi-Fi dimmer, 120V.