



FLOOD-IT

**CORDLESS
RECHARGEABLE LED
FLOODLIGHTS**



SPRING 2016 BROCHURE

www.myfloodit.com
infousa@myfloodit.com // (844) 356 6348

WHY BUY A FLOOD-IT?

The exclusive FLOOD-IT™ range is available internationally through thousands of outlets in the UK, USA and Canada. Since the inaugural FLOOD-IT™ Mobile cordless floodlight was introduced in 2013, our lights have quickly become tool box essentials for the professional tradesman with thousands in use every day. The reason for this is in no doubt thanks to the quality workmanship and reliable nature of our work lights. Using only high specification components and premium lithium-ion batteries sets us apart

from similar products. Here at FLOOD-IT™ we pride ourselves on being the market leaders and thanks to a hard working team that is operating globally, we can provide unparalleled customer service and after-care. At FLOOD-IT™ we know that you need a reliable product so we go the extra mile to ensure you get one by only using high quality components.

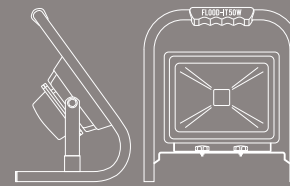

THE BEAST

195FT BEAM RANGE // FL50YCWD

The **BEAST** is a highly portable, versatile cordless site light which removes the need for generators and cumbersome halogen lighting. The 18.5V rechargeable battery and 195ft beam range makes this an ideal solution to site lighting in challenging conditions.

The **BEAST** comes equipped with an integrated dimmer switch to allow the user to adjust the output of the LED light. This extends the battery run time for up to 12 hours from a single charge.



LED

Our COB LEDs have a lifespan of 50,000 hours - over 5 years of constant use! Dovetail this with the machined heat-sink on the reverse of the casing and you get an extremely reliable light fixture. Very early on in our no-compromise approach, we decided that the cheaper SMD LED chips did not create the adequate light spread that we know professional tradesmen require.



DRIVER

In the heart of a FLOOD-IT™ light is the driver that regulates the current from the battery to the LED chip. This battery serves to protect the light from over charging/discharging as well as ensuring a very stable light output.

Omitting the driver as a way of cutting costs results in a light output that greatly reduces during operation. What can start off looking bright quickly dims as the battery loses charge without an internal driver.

BATTERY

We only use premium quality, 'Grade A' Li-Ion batteries.

Cheap lights mean cheap batteries which fail prematurely and simply cannot cope with frequent charge cycles.

FITTINGS

The last thing that you want to happen is to find your floodlight with a broken fitting. At FLOOD-IT™ we aim to eradicate annoying failures like this by using only high quality fixtures and fittings.

The first time someone picks up a FLOOD-IT™, they instantly recognise the robust feeling.






Light source	50W
Dimensions	300 x 235 x 345 mm // 12 x 13.5 x 9.25 inches
Luminous flux	3500+ Lm
Color Temperature	5,500 - 6000K
Color rendering index	RA>70
Housing material	Aluminium and iron
Adaptor (input)	100-240V AC 50/60Hz
Operating temperature	-25°C to 50°C // -13°F to 122°F
Charge temperature	0°C to 40°C // 32°F to 113°F
Beam angle	120°
Battery specifications	18.5V 6.6Ah Li-ion
Charging time	6-8 Hours
Working time	3-12 Hours (with dimmer)
Certificates	CE / RoHS / UL / CSA / IP65
Warranty	2 Years

*Battery life may vary based on your use



For more information visit:
www.myfloodit.com
 or call toll free:
(844) 356 6348

TOLL FREE: (844) 356 6348 // infousa@myfloodit.com

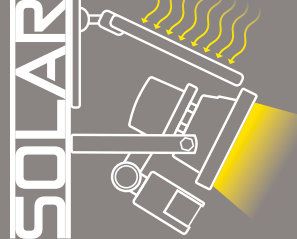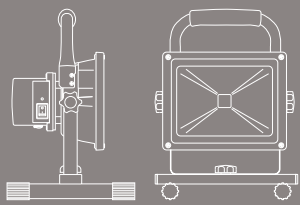

PRIME8

The choice of engineers and the emergency services alike, the **PRIME8** provides high power light for up to 30 hours. The **PRIME8** is a high power cordless rechargeable floodlight with an endurance battery pack and dimmer switch.

130FT BEAM RANGE // FL20GCWD8

The incredible working time, compact portability and typical FLOOD-IT™ reliability makes this a fantastic lighting package for serious illumination on the go.

LASTS UP TO 30 HOURS FROM ONE CHARGE!



Light source	20W
Dimensions	215 x 285 x 185mm // 8.5 x 11.2 x 7.3 inches
Luminous flux	1500+ Lm
Color Temperature	5,500 - 6000K
Color rendering index	RA>70
Housing material	Aluminium and iron
Adaptor (input)	100-240V AC 50/60Hz
Operating temperature	-25°C to 50°C // -13°F to 122°F
Charge temperature	0°C to 40°C // 32°F to 113°F
Beam angle	120°
Battery specifications	7.4V 12Ah Li-ion
Charging time	10 Hours
Working time	9-30 Hours (with dimmer)
Certificates	CE / RoHS / UL / CSA / IP65
Warranty	2 Years

*Battery life may vary based on your use

SOLAR SECURITY

FL6WWSP

FIND OUT MORE!



Light source	6W
Dimensions	145 x 160 x 140 mm // 5.7 x 6.3 x 5 inches
Luminous flux	500+ Lm
Color Temperature	5,500 - 6000K
Color rendering index	RA>70
Housing material	Aluminium and iron
Adaptor (input)	Solar panel & 5m connector lead
Operating temperature	-25°C to 50°C // -13°F to 122°F
Charge temperature	0°C to 40°C // 32°F to 113°F
Beam angle	120°
Battery specifications	3.7V 2.2Ah Li-ion
Charging time (0 - 100%)	12+ Hours depending on weather conditions
Working time	8 Hours*
Certificates	CE
Warranty	1 Years

*Based on the light being active for 15 min per hour

The FLOOD-IT™ Solar Security pack is a combination of high quality lithium-ion batteries, solar power, and a fully adjustable PIR to enable totally 'off-grid' self sufficient lighting.

Mount the high efficiency solar panel to charge the floodlight's batteries, even in cloudy conditions.

Fine tuning the motion detector's sensitivity and light duration means you get light whenever you need it!



FREE CAR CHARGER INCLUDED







WALL FITTINGS INCLUDED

NOW AVAILABLE!

TOLL FREE: (844) 356 6348 // infousa@myfloodit.com

TOLL FREE: (844) 356 6348 // infousa@myfloodit.com

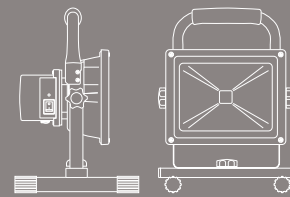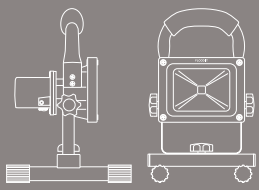

PRO

The FLOOD-IT™ **PRO** is a portable light that incorporates high quality lithium-ion batteries and COB LED chips giving clear bright light for up to 4 hours on one charge. The **PRO** means you can push on and get the job done, even in the worst conditions.

95FT BEAM RANGE // FL10YCW

- » SUPER VERSATILE & LIGHTWEIGHT
- » RANGE OF AVAILABLE ACCESSORIES
- » RECHARGEABLE & CORDLESS
- » MAINS & CAR CHARGER INCLUDED

Light source	10W
Dimensions	145 x 240 x 165 mm // 5.5 x 9.5 x 6.3 inches
Luminous flux	700+ Lm
Color Temperature	5,500 - 6000K
Color rendering index	RA>70
Housing material	Aluminium and iron
Adaptor (input)	100-240V AC 50/60Hz
Operating temperature	-25°C to 50°C // -13°F to 122°F
Charge temperature	0°C to 40°C // 32°F to 113°F
Beam angle	120°
Battery specifications	7.4V 4.4Ah Li-ion
Charging time	5 Hours
Working time	4 Hours*
Certificates	CE / RoHS / UL / CSA / IP65
Warranty	2 Years



*Battery life may vary based on your use

PRIME

130FT BEAM RANGE // FL20YCW

The **PRIME** is a high power LED light that offers a robust and reliable solution to portable lighting in tough situations. Used by railway maintenance, the coast guard and the emergency services thanks to the lack of trailing leads and generators - just safe portable lighting.

- » IDEAL FOR LIGHTING A SCENE
- » NO TRAILING LEADS
- » NO GENERATORS
- » MAINS & CAR CHARGER INCLUDED

Light source	20W
Dimensions	215 x 285 x 185 mm // 8.5 x 11.2 x 7.3 inches
Luminous flux	1500+ Lm
Color Temperature	5,500 - 6000K
Color rendering index	RA>70
Housing material	Aluminium and iron
Adaptor (input)	100-240V AC 50/60Hz
Operating temperature	-25°C to 50°C // -13°F to 122°F
Charge temperature	0°C to 40°C // 32°F to 113°F
Beam angle	120°
Battery specifications	7.4V 8.8Ah Li-ion
Charging time	5 Hours
Working time	4 Hours*
Certificates	CE / RoHS / UL / CSA / IP65
Warranty	2 Years



*Battery life may vary based on your use



FREE CAR CHARGER INCLUDED



FREE CAR CHARGER INCLUDED

BEAM RANGE


LED technology is a complex beast. LED lights that are not manufactured to the same high standard as FLOOD-IT™ often use sub-standard components which cause large variations in real-time light output. With this in mind we have taken the step to redefine LED floodlights by beam range which is much more usable and easier to understand.

The ANSI/NEMA FL1 standard defines beam range as the distance from the source (light) to the point where the light drops to 0.25lux.



PRO USES

- » ELECTRICIANS
- » MECHANICS
- » PLUMBERS
- » + MORE

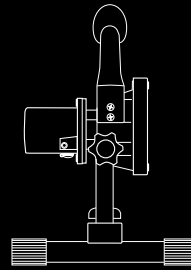


95FT



PRIME USES

- » BUILDING SITES
- » MAINTENANCE
- » ENGINEERING
- » + MORE

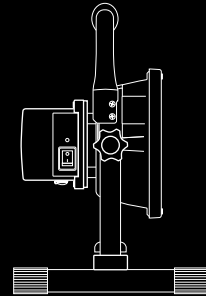


130FT



BEAST USES

- » CONSTRUCTION
- » BUILDING SITES
- » SPORTS GROUNDS
- » + MORE

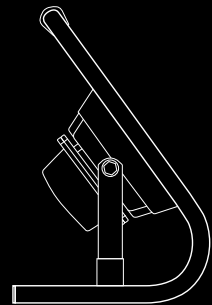

195FT

FLOOD-IT



ATEX



RECHARGEABLE PORTABLE LED FLOODLIGHT
SAFE FOR HAZARDOUS ENVIRONMENTS
GERMAN ENGINEERED & MANUFACTURED

PATENTED DESIGN



COMING SOON

www.myfloodit.com

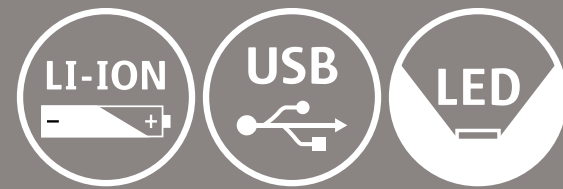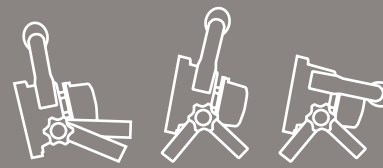

GO **NEW!!**

FLG01

New to 2015, the **GO** is an all new USB rechargeable LED light powered by the same FLOOD-IT™ formula in an entry level package. Using modern technology, the **GO** incorporates newly designed internals that ensures the product remains just as dependable as the rest of the range. Perfect for leisure and home use, the **GO** packs a powerful punch for unbeatable value!

Simply connect the LED light to any USB port with the supplied cable to charge and GO!

Light source	10W
Dimensions	145 x 160 x 125 mm // 5.7 x 6.3 x 4.9 inches
Luminous flux	600+ Lm
Color Temperature	5,500 - 6000K
Color rendering index	RA>70
Housing material	Aluminium and iron
Adaptor (input)	USB
Operating temperature	-25°C to 50°C // -13°F to 122°F
Charge temperature	0°C to 40°C // 32°F to 113°F
Beam angle	120°
Battery specifications	3.7V 4Ah Li-ion
Charging time	4-5 Hours
Working time	3 Hours*
Certificates	CE / RoHS / UL / CSA / IP65
Warranty	1 Year


*Battery life may vary based on your use



FLOOD-IT
CE RoHS



TOLL FREE: (844) 356 6348 // infousa@myfloodit.com

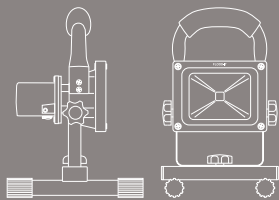

COLOR CHANGING

CUSTOM



PRORGB

COLOR SELECTABLE LED // FL10BRGB

Using the supplied remote control, the lighting effects can be set to colour change or left on a constant colour.

The PRORGB is an amazingly versatile light, from wedding venues to festivals, it creates no hassle ambience easily enhancing any event cost effectively.

Even offshore oil companies and the emergency services have found uses for these lights by colour coding hazardous and safe areas ensuring the right working conditions for their staff.

REMOTE CONTROL INCLUDED

Light source	10W
Dimensions	145 x 240 x 165 mm // 5.5 x 9.5 x 6.3 inches
Luminous flux	700+ Lm
Color Temperature	5,500 - 6000K
Color rendering index	RA>70
Housing material	Aluminium and iron
Adaptor (input)	100-240V AC 50/60Hz
Operating temperature	-25°C to 50°C // -13°F to 122°F
Charge temperature	0°C to 40°C // 32°F to 113°F
Beam angle	120°
Battery specifications	7.4V 4.4Ah Li-ion
Charging time	5 Hours
Working time	4 Hours*
Certificates	CE / RoHS / UL / CSA / IP65
Warranty	2 Years




Have your very own unique FLOOD-IT™ painted in a custom colour. As we are the manufacturers, we can offer a truly custom service just for you. On special orders we can customise the paint finish to include, White, Pink, Grey, Red and many other different colours. For more information on custom orders, contact us today.



Custom FLOOD-ITs are perfect for:

- » Job specific uses
- » Health and safety
- » Warehouse/building zones
- » Brand identity
- » Special offers/promotions
- » Gifts
- » + Many more!

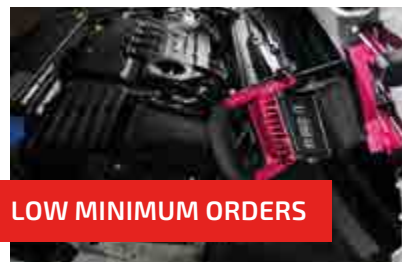

LOW MINIMUM ORDERS



*Battery life may vary based on your use



FREE CAR CHARGER INCLUDED

ACCESSORIES



TRIPOD TR1020Y

Height (extended)	5 feet 2 inches
Height (collapsed)	26 inches
Colour	Yellow
Suitable for	2x Prime Lights 3x Pro Lights



CLAMP FLCLP

Dimensions	7.5 x 8 inches
Fixing Points	1 (Thumb screw included)
Color	Black
Clamp Boots	Injected Rubber



MAGPACK FL10MP

Quantity	4x individual feet
Number of Magnets	4 (1 per foot)
Suitable for	PRO worklights
Clamp Boots	Injected Rubber



MAGNETIC FEET FL10MF/FL20MF

Dimensions	6 x 5.5 inches
Fixing Points	1 (Thumb screw included)
Color	Black

PRO // FL10YCW // 95FT BEAM RANGE



PRIME // FL20YCW // 130FT BEAM RANGE



PRIME8 // FL20GCW8D // 130FT BEAM RANGE



THE BEAST // FL50YCW // 195FT BEAM RANGE



For more information, please contact your national headquarters.

USA CORPORATE OFFICE
16546 NE 26TH AVENUE
SUITE 6G
NORTH MIAMI BEACH
FL 33160
TOLL FREE: (844) 356 6348

UK CORPORATE OFFICE
ROOMS 34 - 38 LESCAZE OFFICE
SHINNERS BRIDGE
DARTINGTON
TOTNES, TQ9 6JD
FREEPHONE: (+44) 0800 043 3122

WORLDWIDE HEADQUARTERS
APOLLO LIGHT GmbH
RINGSTAßE 1.
19528 BOIZENBURG
ELBE, GERMANY

www.myfloodit.com
info@myfloodit.com



The logo for FLOOD-IT, featuring the brand name in bold black letters on a yellow background with a grey border, set against a dark, splatter-like background.

FLOOD-IT

The logo for Apollo Lightgroup, consisting of a cluster of white dots of varying sizes arranged in a grid-like pattern to the left of the text.

PART OF THE
APOLLO
LIGHTGROUP


TOLL FREE: (844) 356 6348

WWW.MYFLOODIT.COM

INFOUSA@MYFLOODIT.COM

INFOCANADA@MYFLOODIT.COM



 Find us on Facebook

 @myfloodit