

DEL Series

Decorative 6, 12 and 24V
Thermoplastic Cube Units

Type:	_____
Project/Location:	_____
Contractor:	_____
Prepared By:	_____
Date:	_____
Model No.:	_____

FEATURES

- Impact-resistant steel center cabinet contains the battery and charger
- Frosted, thermoplastic light cubes protect light modules against vandalism while providing visual masking and light diffusion
- Units can be wall or ceiling mounted
- Maintenance-free, sealed Lead-Calcium battery
- Fully automatic, solid-state charger with low voltage battery disconnect, brownout protection, integral test switch and LED AC-On pilot lights
- Also available as a remote fixture; see the Remote Fixtures section of this catalogue
- CSA C22.2 No. 141 certified
- NEXUS® compatible



TYPICAL SPECIFICATIONS

Supply and install a complete emergency lighting system as described herein and shown on the drawings.

The **Emergi-Lite® DEL Smart Diagnostic** micro-controller board shall supply the rated load for a minimum of 1/2 hour to 87.5% of the rated battery voltage. The unit shall be rated 120V or 347V, 60 Hz and be CSA listed.

The unit shall have an output of _____ V.

The charger shall be fully computer tested and its charge voltage factory set to ± 1% tolerance. Chargers with field-adjusted potentiometers are not acceptable. A pulse-type charger shall be employed to promote long battery life and reduce the potential for grid corrosion. The charger shall provide a continuous high charge to recharge the battery, and when the battery is at full capacity, the charger will shut off. Periodically the charger shall provide a pulse of energy to keep the battery topped off. The charger shall be current limited, temperature compensated, short-circuit proof and reverse polarity protected. The unit shall be furnished with an electronic lockout circuit, which will connect the battery when the AC circuit is activated, and an electronic brownout circuit, which will activate the emergency heads when utility power dips below 75% of nominal voltage. A low voltage battery protection circuit shall be provided and will disconnect the battery from the fused output circuit at the end of discharge. The unit shall self-test for 1 minute every 30 days, 10 minutes every 6 months and 30 minutes every 12 months. The unit shall be capable of full recharge in compliance with CSA specifications. The unit shall be furnished with a sealed, dust-tight relay, a test switch and diagnostic LED indicator lights to continuously monitor the status of the unit: Battery Failure, Battery Disconnected, Charger Failure, Lamp Failure, Service Alarm, AC -"ON", Charger High Rate. The unit shall come complete with fully adjustable 12V or 24V/12W or 20W quartz halogen lamps. Each lamp shall be housed in an impact-resistant polycarbonate cube. The cube lens shall be frosted to diffuse light.

The unit shall be **Emergi-Lite®** model: _____.

WIRE GUARDS

460.0097-E	Wall Mount or Ceiling Mount
------------	-----------------------------

REPLACEMENT LAMPS

ORDERING CODE	TYPE	VOLTAGE/ WATTAGE
570.0016-E	Mini tungsten	6V-9W
570.0025-E	Mini tungsten	12V-9W
570.0045-E	Mini tungsten	24V-9W
580.0097-E	MR16, LED	6V-4W
580.0093-E	MR16, LED	12V-4W
580.0098-E	MR16, LED	24V-4W
580.0100-E	MR16, LED	24V-6W
580.0104-E	MR16, LED	12V-5W
580.0095-E	MR16, LED	120V-4W
580.0106-E	MR16, LED	120V-4W

For the complete list, please see the lamp chart on pages 156 to 158

IN THE SAME FAMILY



EF26/EF26DS/EF26D SERIES

P. 151

Type: _____
 Project/Location: _____
 Contractor: _____
 Prepared By: _____
 Date: _____
 Model No.: _____


DEL Series

Decorative 6, 12 and 24V
Thermoplastic Cube Units



DIMENSIONS

Dimensions are approximate and subject to change.

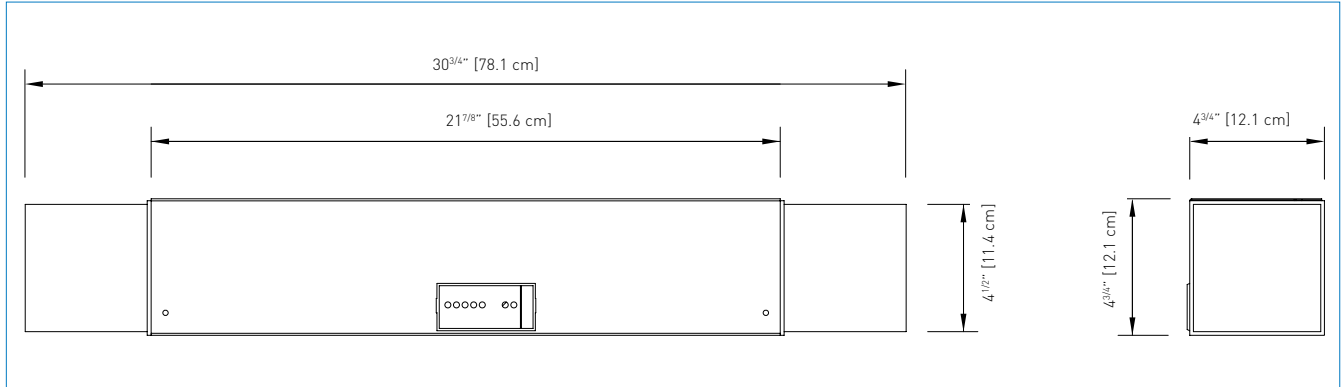

POWER CONSUMPTION AND UNIT RATING

MODEL	AC SPECS	WATTAGE CAPACITY					
		30MIN	1H00	1H30	2H00	4H00	
06DEL36	120/347VAC	0.10/0.04 A	36	21	15	12	6
06DEL72		0.22/0.08 A	72	42	30	24	12
06DEL144		0.22/0.08 A	108	63	45	36	18
06DEL180		0.22/0.08 A	180	105	75	60	30
12DEL36		0.10/0.04 A	36	21	15	12	6
12DEL72		0.15/0.06 A	72	42	30	24	12
12DEL144		0.41/0.14 A	144	84	60	48	24
12DEL200		0.41/0.14 A	200	117	83	67	33
12DEL288		0.41/0.14 A	288	168	120	96	48
24DEL144		0.55/0.20 A	144	84	60	48	24
24DEL288		0.67/0.23 A	288	168	120	96	48

ORDERING INFORMATION

SERIES	CAPACITY	VOLTAGE	OPTIONS	# OF LAMPS	LAMP STYLE/WATTAGE
06DEL= 6V	36= 36W 72= 72W 144= 144W 180= 180W	Blank= 120/347VAC input -2= 277VACinput	U= auto-diagnostics* UN= auto-diagnostics, non-audible* NEX= NEXUS® system interface* NEXRF= wireless NEXUS® system interface* CT= cabtire D= time delay L= line cord (120V)*** LW= cord and twist-lock plug (120V)*** T= lamp disconnect TB= DC terminal block TBAC= AC terminal block TBACDC= AC/DC terminal block TP= tamper-proof screws**** X2= remote test receiver**	/2= two lamps	Blank= tungsten, 6V, 12V, 24V-9W, wedge base LA= MR16 LED, 6V-4W LG= MR16 LED, 12V-4W LI= MR16 LED, 12V-5W LJ= MR16 LED, 12V-6W LL= MR16 LED, 24V-4W LM= MR16 LED, 24V-6W MI= MR16 halogen, 6V-6W MJ= MR16 halogen, 6V-10W MK= MR16 halogen, 12V-12W MA= MR16 halogen, 12V-20W MB= MR16 halogen, 12V-35W MC= MR16 halogen, 12V-50W MS= MR16 halogen, 24V-12W MD= MR16 halogen, 24V-20W ME= MR16 halogen, 24V-35W MF= MR16 halogen, 24V-50W MW= MR16-IR, 12V-20W, high output -18= tungsten, 12V, 24V-18W, wedge base Q= mini halogen, 6V, 12V-8W, bi-pin Q12= mini halogen, 6V, 12V-12W, bi-pin Q20= mini halogen, 6V, 12V, 24V-20W, bi-pin
12DEL= 12V	36= 36W 72= 72W 144= 144W 200= 200W 288= 288W				
24DEL= 24V	144= 144W 288= 288W				

* Minimum lamp load required: 20% of unit capacity.
 * Not all options available with the NEXUS® system. Please consult your sales representative.
 ** TX2= remote test transmitter (sold separately)
 *** 120V is standard
 **** 990.0119-E= tamper-proof bit (sold separately)

EXAMPLE: 06DEL36U/2