

Individual Spec Sheet

L2TRV

TRI-LEVEL MOTION SENSOR LED STRIP

3 CCT Selectable

ORDERING INFORMATION

Order code: 69403
Model number: L2TRV-48LS2-Q/3C
UPC: 069549027114
Case quantity: 6
DLC unique ID: S-RWG1X2 (DLC Premium) / S-S8604P (DLC Standard)

PHYSICAL DATA

Length in. (cm): 47 3/8 (120.34)
Lens material: Frosted PMMA
Housing material: 24 gauge white powder painted steel
Mounting: Surface, suspended or row mounted (V-Hooks and junction box cover included)
Sensor: Integrated tri-level microwave (high frequency) motion sensor

PERFORMANCE DATA

Watts (W): 56
Volts (V AC): 120-347
Color temperature (K):¹ 3 500/4 000/5 000
Lumen output (lm):² 7 392
Efficacy (lm/W): 132
CRI: 80+
Life L70 (h):³ 156 000
Tested LM-80 (h):³ 10 000
Power factor: 0.90
THD (%): 10
Frequency (Hz): 50/60
Surge protection (kV): 2.5
Input current (A): 0.47-0.16
Operating temp. range: -20 °C to 50 °C (-4 °F to 122 °F)

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from DLC reported data at 3 500 K. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

LUMEN SPECIFICATION TABLE

3 500 K		4 000 K		5 000 K	
Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)
7 392	132	7 784	139	7 336	131

DEFAULT PROGRAMMING

4 000 K

ACCESSORIES (order separately)

Order code	Type
68676	Suspension kit - 2 chains (1 m)
69082	10' Aviation cable kit with canopy, power cord & dimming wires
69405	Continuous row mounting connector
69399	Remote control for motion sensor
69398	Transparent end caps (set of 2)
69413	Wire guard kit 48"
69396	Replacement lens 48"



quick ship



LED fixture



damp location




ICES 005



Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/search.

SENSOR PROGRAMMING AND SETTINGS OPTIONS

NOTE: A remote control (sold separately - order code: 69399) is required to modify sensor programming. A single remote control can be used to program multiple sensors.

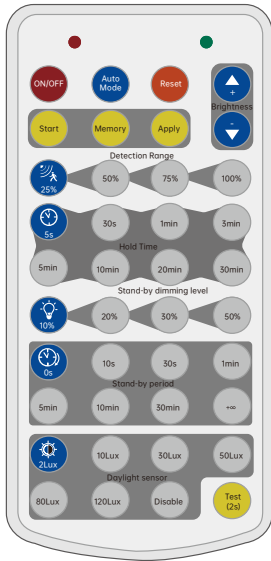

Button	Function	Details
	ON/OFF	1. The "ON/OFF" button functions only to turn the luminaire ON or OFF. 2. If this button is pressed to turn off the luminaire before a short-circuit, the luminaire will remain turned off once the power is restored.
	Auto Mode	When the "Auto Mode" button is pressed, the sensor starts to work and all sensor settings will remain the same as before the luminaire was turned ON/OFF.
	Reset	When the "Reset" button is pressed, the sensor settings will return to the factory default settings: Brightness: 100% / Detection Area: 100% / Hold Time: 5 sec. / Standby Period: Disable / Daylight Threshold: Disable
	Detection Area	The defined area in which movement will trigger the motion sensor. Options: 25% / 50% / 75% / 100%
	Hold Time	The time period the luminaire remains at 100% illumination after no motion is detected. Options: 5 sec. / 30 sec. / 1 min. / 3 min. / 5 min. / 10 min. / 20 min. / 30 min.
	Standby Dimming Level	The level of dimmed low light output after the Hold Time in the long absence of motion. Options: 10% / 20% / 30% / 50%
	Standby Period	The time period the luminaire remains at a low light output level before it completely switches off in the long absence of motion. When set to "Disable" mode, the low light is maintained until motion is detected (Bi-Level). Note: "0 sec." means ON/OFF control. "+∞" means Bi-Level dimming control; the luminaire never turns off. Options: 0 sec. / 10 sec. / 30 sec. / 1 min. / 5 min. / 10 min. / 30 min. / +∞ (Disable)
	Daylight Threshold	The sensor will function whenever the ambient lux level is lower than the selected lux value. When set to "Disable" mode, the sensor will continuously function regardless of the ambient lux level. Options: 2 lux / 10 lux / 30 lux / 50 lux / 80 lux / 120 lux / Disable
	Test Mode	The button "Test (2s)" is used for testing purposes after sensor programming. When the button is pressed, the sensor enters into "Test Mode" and the luminaire will remain ON for 2 seconds.


SENSOR DEFAULT PROGRAMMING

Detection Area	100%
Hold Time	10 min.
Standby Dimming Level	50%
Standby Period	10 min.
Daylight Threshold	Disable

SENSOR MOUNTING AND DETECTION PATTERN

Mounting Height	14.76 ft (4.5 m) max.
Detection Range	9.84 - 22.96 ft (3 - 7 m)
Detection Angle - Ceiling Mounted	360 °
Detection Angle - Wall Mounted	150 °

SENSOR DETECTION COVERAGE

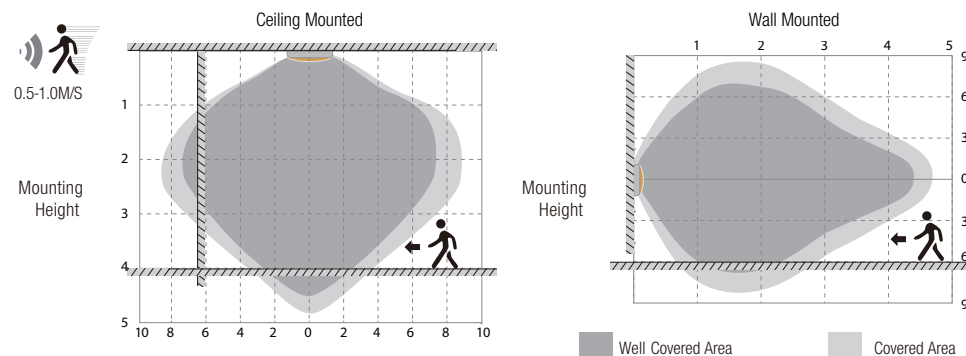

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.


SENSOR DAISY CHAIN FUNCTION

The L2TRV series can be daisy chained together with L2STR series luminaires. The integrated microwave motion sensor in the L2TRV will also control the L2STR luminaires. They can either be installed in a continuous row or can be placed up to 2 m apart from one another. Refer to the installation guide for proper wiring instructions.

Recommended luminaire pairings:

L2TRV Series		L2STR Series		Daisy Chain Maximum
Order code	Model number	Order code	Model number	
69403	L2TRV-48LS2-Q/3C	69393	L2STR-48LS2-Q/3C	10 Luminaires (1 L2TRV + 9 L2STR)

DIMENSIONS AND WEIGHT

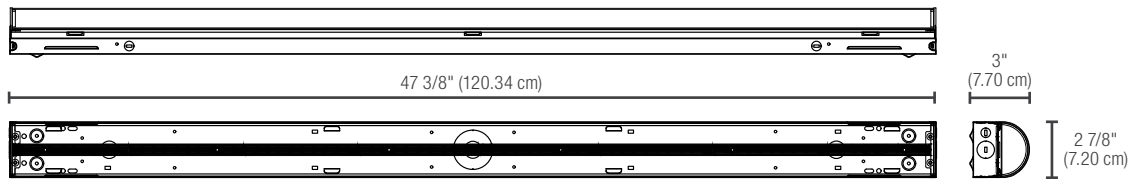


Net weight (lbs)	4.4
------------------	-----

PHOTOMETRIC DATA¹

69403 • L2TRV-48LS2-Q/3C • 4 000 K • 7 778.3 lm

Polar candela distribution

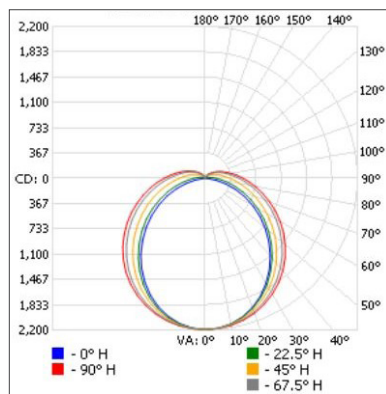

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	1 697.9	21.8%
0-40	2 781.2	35.8%
0-60	4 976.0	64%
60-90	2 015.4	25.9%
70-100	1 425.7	18.3%
90-120	623.6	8%
0-90	6 991.3	89.9%
90-180	786.9	10.1%
0-180	7 778.3	100%

Illuminance at a distance

Center beam fc		Beam width	
1.7'	759	4.2'	8.0'
3.3'	201	8.1'	15.5'
5.0'	87.7	12.3'	23.5'
6.7'	48.8	16.4'	31.5'
8.3'	31.8	20.4'	39.0'
10.0'	21.9	24.5'	47.0'

■ Vert. spread: 101.7°
■ Horiz. spread: 133.9°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.