SIEMENS

Data sheet 3RU2116-1FC0



Overload relay 3.5...5.0 A Thermal For motor protection Size S00, Class 10 Contactor mounting Main circuit: Spring-type terminal Auxiliary circuit: spring-type terminal Manual-Automatic-Reset

| product brand name | SIRIUS |
|--|------------------------|
| product designation | thermal overload relay |
| product type designation | 3RU2 |
| General technical data | |
| size of overload relay | S00 |
| size of contactor can be combined company-specific | S00 |
| power loss [W] for rated value of the current at AC in hot operating state | 6.6 W |
| • per pole | 2.2 W |
| insulation voltage with degree of pollution 3 at AC rated value | 690 V |
| surge voltage resistance rated value | 6 kV |
| maximum permissible voltage for protective separation | |
| in networks with ungrounded star point between auxiliary and auxiliary circuit | 440 V |
| in networks with grounded star point between auxiliary and auxiliary circuit | 440 V |
| in networks with ungrounded star point between main and auxiliary circuit | 440 V |
| in networks with grounded star point between main and auxiliary circuit | 440 V |
| shock resistance according to IEC 60068-2-27 | 8g / 11 ms |
| reference code according to IEC 81346-2 | F |
| Substance Prohibitance (Date) | 10/01/2009 |
| SVHC substance name | Lead - 7439-92-1 |
| Weight | 0.157 kg |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| during operation | -40 +70 °C |
| during storage | -55 +80 °C |
| during transport | -55 +80 °C |
| temperature compensation | -40 +60 °C |
| relative humidity during operation | 10 95 % |
| Environmental footprint | |
| Global Warming Potential [CO2 eq] total | 40 kg |
| Global Warming Potential [CO2 eq] during manufacturing | 1.01 kg |
| global warming potential [CO2 eq] during sales | 0.044 kg |
| Global Warming Potential [CO2 eq] during operation | 39 kg |
| Global Warming Potential [CO2 eq] after end of life | 0.022 kg |
| Main circuit | |
| number of poles for main current circuit | 3 |
| adjustable current response value current of the current- | 3.55 A |

| Operating voltage | |
|--|--|
| | |
| ◆ at AC-3e rated value maximum 690 V operating frequency rated value 50 60 Hz operational current rated value 5 A operating power 5 A • at AC-3 — at 400 V rated value — at 400 V rated value 1.5 kW — at 690 V rated value 4 kW • at AC-3e — at 400 V rated value — at 400 V rated value 1.5 kW — at 500 V rated value 2.2 kW — at 690 V rated value 4 kW — at 690 V rated value 1.5 kW — at 700 V rated value 1.5 kW — at 700 V rated value 1.5 kW — at 700 V contacts for auxiliary contacts 1 • note for contacts of auxiliary contacts | |
| operating frequency rated value 5 0 60 Hz operational current rated value 5 A operational current at AC-3e at 400 V rated value 5 A operating power | |
| operational current rated value 5 A operating power | |
| operating power | |
| operating power | |
| ■ at AC-3 — at 400 V rated value — at 500 V rated value — at 690 V rated value — at 690 V rated value ■ at AC-3 — at 400 V rated value ■ at AC-3 — at 400 V rated value — at 500 V rated value — at 690 V rated value Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts ● note number of NO contacts for auxiliary contacts ● note number of CO contacts for auxiliary contacts ● note value 1.5 kW — at 690 V A kW Auxiliary circuit design of the auxiliary switch integrated for contactor disconnection 1 for contactor disconnection 1 and | |
| - at 400 V rated value | |
| at 500 V rated value at 690 V rated value at 690 V rated value at 400 V rated value at 400 V rated value at 500 V rated value at 690 V rated value at 500 V rated value at 500 V rated value at 690 V rated value at 500 V rated value at 690 V rated value at 690 V rated value at 690 V rated value at 400 V rated value at 690 V rated value at | |
| - at 690 V rated value • at AC-3e - at 400 V rated value - at 500 V rated value - at 690 V rated value 4 kW Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts • note number of NO contacts for auxiliary contacts • note number of CO contacts for auxiliary contacts • note number of CO contacts for auxiliary contacts • once number of CO contacts for auxiliary contacts • at 24 V • at 110 V • at 120 V • at 125 V • at 230 V • at 400 V • at 690 V 0.75 A | |
| | |
| at 400 V rated value at 500 V rated value at 690 V rated value 2.2 kW | |
| - at 500 V rated value - at 690 V rated value 4 kW Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts ● note number of NO contacts for auxiliary contacts 1 ● note number of CO contacts for auxiliary contacts 0 operational current of auxiliary contacts at AC-15 ● at 24 V ● at 110 V ● at 125 V ● at 230 V ● at 400 V ● at 690 V | |
| Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts • note number of NO contacts for auxiliary contacts • note number of CO contacts for auxiliary contacts • note number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 • at 24 V • at 110 V • at 125 V • at 230 V • at 400 V • at 690 V order time auxiliary contacts 4 kW integrated integrated integrated for contactor disconnection 1 4 kW AW 1 A A A 4 A A A A A A A A A | |
| design of the auxiliary switch number of NC contacts for auxiliary contacts • note number of NO contacts for auxiliary contacts • note number of NO contacts for auxiliary contacts • note number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 • at 24 V • at 110 V • at 120 V • at 125 V • at 230 V • at 400 V • at 690 V onumber of NO contacts for auxiliary contacts integrated integ | |
| design of the auxiliary switch integrated number of NC contacts for auxiliary contacts 1 note for contactor disconnection number of NO contacts for auxiliary contacts 1 note for message "Tripped" number of CO contacts for auxiliary contacts 0 operational current of auxiliary contacts at AC-15 3 A at 24 V 3 A at 110 V 3 A at 125 V 3 A at 230 V 2 A at 400 V 1 A at 690 V 0.75 A | |
| number of NC contacts for auxiliary contacts ● note for contactor disconnection number of NO contacts for auxiliary contacts ● note for message "Tripped" number of CO contacts for auxiliary contacts 0 operational current of auxiliary contacts at AC-15 ● at 24 V ● at 110 V ● at 120 V ● at 125 V ● at 230 V ● at 400 V ● at 690 V 0.75 A | |
| note for contactor disconnection number of NO contacts for auxiliary contacts note for message "Tripped" number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 24 V at 24 V at 110 V at 110 V at 120 V at 125 V at 230 V at 400 V at 400 V at 690 V note contactor disconnection 1 A B B B B B B B B<td></td> | |
| number of NO contacts for auxiliary contacts • note number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 • at 24 V • at 110 V • at 120 V • at 125 V • at 230 V • at 400 V • at 690 V 0.75 A | |
| ● note for message "Tripped" number of CO contacts for auxiliary contacts 0 operational current of auxiliary contacts at AC-15 ● at 24 V 3 A ● at 110 V 3 A ● at 120 V 3 A ● at 125 V 3 A ● at 230 V 2 A ● at 400 V 1 A ● at 690 V 0.75 A | |
| number of CO contacts for auxiliary contacts 0 operational current of auxiliary contacts at AC-15 3 A • at 24 V 3 A • at 110 V 3 A • at 120 V 3 A • at 125 V 3 A • at 230 V 2 A • at 400 V 1 A • at 690 V 0.75 A | |
| operational current of auxiliary contacts at AC-15 • at 24 V • at 110 V • at 120 V • at 125 V • at 230 V • at 400 V • at 690 V 0.75 A | |
| at 24 V at 110 V at 120 V at 125 V at 230 V at 400 V at 690 V 3 A 3 A 4 A 5 A 6 A 6 A 7 A 7 A 7 A 7 A | |
| at 110 V at 120 V at 125 V at 230 V at 400 V at 690 V 3 A 2 A 1 A 0.75 A | |
| at 120 V at 125 V at 230 V at 400 V at 690 V 3 A 2 A 1 A 0.75 A | |
| at 125 V at 230 V at 400 V at 690 V 3 A 2 A 1 A 0.75 A | |
| at 230 V at 400 V at 690 V 2 A 1 A 0.75 A | |
| • at 400 V • at 690 V | |
| • at 690 V 0.75 A | |
| | |
| an anti-mal annual of antillar annual at at PO 40 | |
| operational current of auxiliary contacts at DC-13 | |
| • at 24 V 2 A | |
| • at 60 V 0.3 A | |
| • at 110 V 0.22 A | |
| • at 125 V 0.22 A | |
| • at 220 V 0.11 A | |
| contact rating of auxiliary contacts according to UL B600 / R300 | |
| Protective and monitoring functions | |
| trip class CLASS 10 | |
| design of the overload release thermal | |
| UL/CSA ratings | |
| full-load current (FLA) for 3-phase AC motor | |
| • at 480 V rated value 5 A | |
| • at 600 V rated value 5 A | |
| Short-circuit protection | |
| design of the fuse link | |
| • for short-circuit protection of the auxiliary switch required • fuse gG: 6 A, quick: 10 A | |
| Installation/ mounting/ dimensions | |
| | |
| mounting position any fastoning method Contactor mounting | |
| fastening method Contactor mounting height 87 mm | |
| height 87 mm width 45 mm | |
| | |
| depth 70 mm | |
| Connections/ Terminals | |
| product component removable terminal for auxiliary and control circuit | |
| type of electrical connection | |
| • for main current circuit spring-loaded terminals | |
| • for auxiliary and control circuit spring-loaded terminals | |
| arrangement of electrical connectors for main current Top and bottom | |

| circuit | |
|--|--|
| type of connectable conductor cross-sections | |
| for main contacts | |
| — solid or stranded | 1x (0,5 4 mm²) |
| finely stranded with core end processing | 1x (0.5 2.5 mm²) |
| finely stranded without core end processing | 1x (0.5 2.5 mm²) |
| for AWG cables for main contacts | 1x (20 12) |
| type of connectable conductor cross-sections | |
| for auxiliary contacts | |
| — solid or stranded | 2x (0.5 2.5 mm²) |
| finely stranded with core end processing | 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) |
| finely stranded without core end processing | 2x (0.5 1.5 mm²) |
| for AWG cables for auxiliary contacts | 2x (20 14) |
| design of screwdriver shaft | Diameter 3 mm |
| size of the screwdriver tip | 3,0 x 0,5 mm |
| Safety related data | |
| failure rate [FIT] with low demand rate according to SN 31920 | 50 FIT |
| MTTF with high demand rate | 2 280 a |
| IEC 61508 | |
| T1 value | |
| for proof test interval or service life according to IEC 61508 | 20 a |
| Electrical Safety | |
| protection class IP on the front according to IEC 60529 | IP20 |
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front |
| Display | |
| display version for switching status | Slide switch |
| Approvals Certificates | |
| | |









Confirmation





For use in hazardous locations Test Certificates Marine / Shipping







Miscellaneous

Special Test Certificate Type Test Certificates/Test Report



Marine / Shipping













other Railway Environment

Miscellaneous

Confirmation

Special Test Certificate



Environmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2116-1FC0

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RU2116-1FC0}$


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1FC0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2116-1FC0&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1FC0/char

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2116-1FC0&objecttype=14&gridview=view1

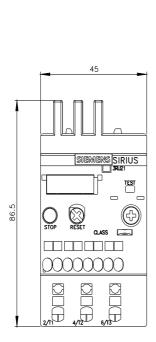

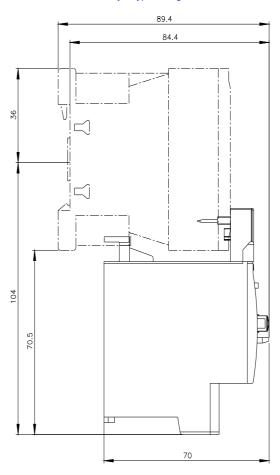

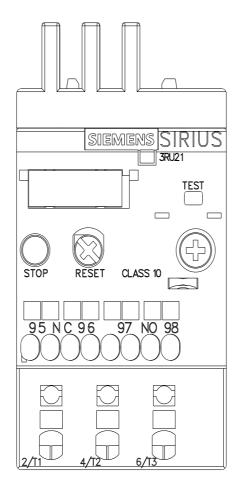

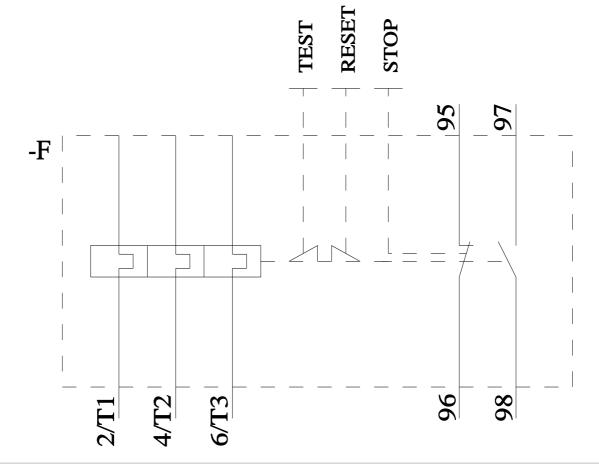

last modified: 11/9/2024 🖸