


Date: _____
 In hands date of project: _____
 Project name/Number: _____
 Name of distributor: _____
 Client #: _____
 Name of end user: _____

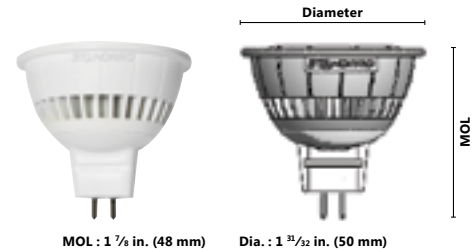

ORDERING INFORMATION

Order code: 63095
 Description: LED/MR16/7W/30K/38/STD
 UPC: 069549630956
 Case quantity: 24

PERFORMANCE DATA

Shape: MR16
 Wattage (W): 7
 Base: GU5.3
 Lamp voltage (VAC): 12
 Colour temperature (K)**: 3 000
 Average life (L70 hours): 40 000
 Initial lumens (lm)*: 500
 Initial lumens per watt (lm/W): 71
 CBCP: 1 449
 CRI: 80
 Beam angle: 38
 Power factor: ≥ 0.7
 Operating temperature range: -40°C/-40°F to 40°C/104°F

*Initial lumens range: +/- 10 % **Typical colour temperature range: +/- 5 %



CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of Electric Shock – Do not use where directly exposed to water or weather.
- Not for use in completely enclosed recessed fixtures.
- Added weight of the device may cause instability of a free - standing portable luminaire.
- Use only with a portable table lamp that is provided with a shade.
- Use in portable table lamps in which the distance from the bottom of the base to the top of the lampholder does not exceed three (3) times the minimum base diameter.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60 Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- For complete dimmer compatibility and warranty information visit www.standardpro.com.

NOTES: This device complies with Part 15 of the FCC rules and has been tested and found to comply with the limits for a Class B digital device. This product may cause interference with other devices. If interference occurs, change the location of the product. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment. This RFLD device complies with Canadian ICES-003. LED lamps must be stored, operated under suitable environmental conditions and in accordance with, but not limited to, the latest National Electrical Code, cETLus, cULus, CSA and ANSI specifications.

Qty	Description	Price

I accept the specifications of the lamp configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

July 14, 2016

