

2-conductor through terminal block; 4 mm<sup>2</sup>; suitable for Ex e II applications; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP<sup>®</sup>; 4,00 mm<sup>2</sup>; orange



https://www.wago.com/2004-1202



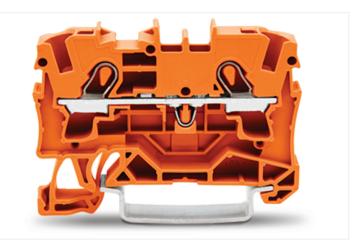

Color: 📕 orange



#### Similar to illustration

Through terminal block, 2004 Series, Push-in CAGE CLAMP®

Quick and easy connections are guaranteed with this through terminal block (item number 2004-1202). Whether for industrial or building applications, you can use our through terminal blocks to connect electrical conductors quickly and safely. We offer variants for both classic through-wiring and potential distribution. This through rail-mount terminal block has a rated voltage of 800 V and can handle currents up to 32 A. Strip lengths must be between 11 mm and 13 mm when connecting conductors to this through terminal block. This product features conductor terminals and utilizes Push-in CAGE CLAMP®. Push-in CAGE CLAMP® connection technology is ideal for connecting all conductor types. Both solid and fine-stranded conductors with ferrules can be plugged in without needing to use any tools—all thanks to its pluggable design. The item's dimensions are 6.2 x 52.3 x 39.5 mm (width x height x depth). This through terminal block is suitable for conductor cross sections ranging from 0.5 mm² to 6 mm². It comes with one level and two clamping points that you can use to connect a single potential. The orange housing is made of polyamide (PA66) for insulation. This through rail-mount terminal block is operated with an operating tool. Our TOPJOB® S rail-mount terminal blocks guarantee secure electrical connections in various industrial applications and modern building installations. They simplify wiring, as you can quickly plug in solid, stranded, and fine-stranded conductors with ferrules. These through rail-mount terminal blocks are mounted using DIN-35 rails.. The front-entry wiring means you can connect copper conductors. The two jumper slots enable potential distribution to other clamping points. This product is designed for specific Ex applications (please refer to the product datasheet).

#### **Electrical data**

Ratings per	IEC/EN 60947-7-1		
Overvoltage category	Ш	III	Ш
Pollution degree	3	2	2
Nominal voltage	800 V	-	-
Rated surge voltage	8 kV	-	-
Rated current	32 A	-	-

41 A	-	-
	41 A	41 A -

## Data Sheet | Item Number: 2004-1202 https://www.wago.com/2004-1202

Approvals per	UL 1059		
Use group	В	С	D
Rated voltage	600 V	600 V	-
Rated current	30 A	30 A	-

Ex information	
Reference hazardous areas	See application instructions in section "Knowledge and Downloads – Documentation – Additio- nal Information: Technical Section; Tech- nical Explications"
Ratings per	ATEX: PTB 05 ATEX 1095 U / IECEx: PTB 05.0033U (Ex eb IIC Gb)
Rated voltage EN (Ex e II)	550 V
Rated current (Ex e II)	30 A

	NĮA	- •
	CSA 22.2 No 15	8
В	С	D

600 V

30 A

600 V

30 A

Power	Loss

Rated current

Approvals per Use group Rated voltage

Power loss, per pole (potential)	1.024 W
Rated current ${\rm I}_{\rm N}$ for specified power loss	32 A
Resistance value for specified, current- dependent power loss	0.001 Ω

Connection data				
Clamping units	2		Connection 1	
Total number of potentials	1		Connection technology	Push-in CAGE CLAMP®
Number of levels	1		Actuation type	Operating tool
Number of jumper slots 2	2		Connectable conductor materials	Copper
			Nominal cross-section	4 mm <sup>2</sup>
			Solid conductor	0.5 6 mm² / 20 10 AWG
			Solid conductor; push-in termination	1.5 6 mm² / 14 10 AWG
			Fine-stranded conductor	0.5 6 mm² / 20 10 AWG
		Fine-stranded conductor; with insulated ferrule	0.5 4 mm² / 20 12 AWG	
		Fine-stranded conductor; with ferrule; push-in termination	1.5 4 mm² / 18 12 AWG	
		Note (conductor cross-section)	Depending on the conductor character stic, a conductor with a smaller cross- section can also be inserted via push-ir termination.	
			Strip length	11 13 mm / 0.43 0.51 inches
			Wiring direction	Front-entry wiring

Physical data	
Width	6.2 mm / 0.244 inches
Height	52.3 mm / 2.059 inches
Depth from upper-edge of DIN-rail	32.9 mm / 1.295 inches
Depth	39.5 mm / 1.555 inches

Mechanical data	
Mounting type	DIN-35 rail
Marking level	Center/side marking

# Data Sheet | Item Number: 2004-1202 https://www.wago.com/2004-1202

Material data



Note (material data)	
	Information on material specifications can be found here
Color	orange
Material group	1
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.114 MJ
Weight	6.9 g

cessing temperature	-35 +85 °C	Environmental Testing (Environme	ntal Conditions)
Continuous operating temperature -60 +105 °C	-60 +105 ℃	Test specification Railway applications – Rolling stock – Electronic equipment	DIN EN 50155 (VDE 0115-200):2022-06
		Test procedure Railway applications – Rolling stock equipment – Shock and vibration tests	DIN EN 61373 (VDE 0115-0106):2011-04
		Spectrum/Installation location	Service life test, Category 1, Class A/B
		Function test with noise-like vibration	Test passed according to Section 8 of the standard
		Frequency	$f_1 = 5 Hz \text{ to } f_2 = 150 Hz$ $f_1 = 5 Hz \text{ to } f_2 = 150 Hz$
	Acceleration	0.101g (highest test level used for all axes) 0.572g (highest test level used for all axes) 5g (highest test level used for all axes)	
		Test duration per axis	10 min. 5 h
		Test directions	X, Y and Z axes X, Y and Z axes X, Y and Z axes
		Monitoring for contact faults/interruptions	Passed
		Voltage drop measurement before and after each axis	Passed
		Simulated service life test through incre- ased levels of noise-like vibration	Test passed according to Section 9 of the standard
		Extended test scope: Monitoring for con- tact faults/interruptions	Passed Passed
		Extended test scope: Voltage drop mea- surement before and after each axis	Passed Passed
		Shock test	Test passed according to Section 10 of the standard
		Shock form	Half sine
		Shock duration	30 ms
		Number of shocks per axis	3 pos. und 3 neg.
		Vibration and shock stress for rolling stock equipment	Passed

https://www.wago.com/2004-1202



Commercial data	
Product Group	22 (TOPJOB S)
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332010986
Customs tariff number	85369010000

Product classification	
UNSPSC	39121402
eCl@ss 10.0	27-14-11-20
eCl@ss 9.0	27-14-11-20
ETIM 9.0	EC000897
ETIM 8.0	EC000897
ECCN	NO US CLASSIFICATION

#### **Environmental Product Compliance**

**RoHS Compliance Status** 

Compliant,No Exemption

#### Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 60947	71-125978
CCA DEKRA Certification B.V.	EN 60947	NTR NL-7964
CSA DEKRA Certification B.V.	C22.2 No. 158	1645435
UL Underwriters Laboratories Inc	UL 1059	E45172

Declarations of conformity and manufacturer's declarations



Approval	Standard	Certificate Name
ATEX-Attestation of Con- formity WAGO GmbH & Co. KG	-	-
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
Railway WAGO GmbH & Co. KG	-	Railway Ready
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

#### Approvals for marine applications




Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	-	20-HG1941090-PDA
BV Bureau Veritas S.A.	EN 60947	38586/B0 BV

#### Approvals for hazardous areas

$AEx \langle Ex \rangle$	(IECEx	
Approval	Standard	Certificate Name
AEx Underwriters Laboratories Inc.	EN 60079	E185892 (AEx eb IIC resp. Ex eb IIC)
ATEX Physikalisch Technische Bundesanstalt (PTB)	EN 60079	PTB 05 ATEX 1095 U (II 2 G Ex eb IIC Gb bzw. I M 2 Ex eb I Mb)
CCCEx CQST/CNEx	GB/T 3836.3	2020312313000160 (Ex eb IIC Gb, Ex eb I Mb)
IECEx Physikalisch Technische Bundesanstalt (PTB)	IEC 60079	IECEx PTB 05.0033 U (Ex eb IIC Gb resp. Ex eb I Mb)
INMETRO TÜV Rheinland do Brasil Ltda.	IEC 60079	TÜV 12.1309 U

https://www.wago.com/2004-1202




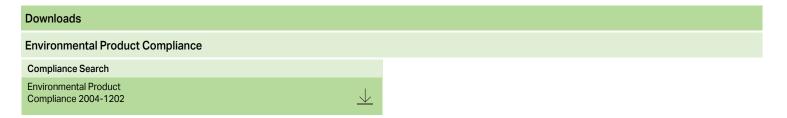

#### Documentation

Bid Text			
2004-1202	07.08.2018	docx 14.60 KB	$\underline{\checkmark}$
2004-1202	19.02.2019	xml 3.86 KB	$\downarrow$

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 2004-1202	EPLAN Data Portal 2004-1202
	WSCAD Universe 2004-1202
	ZUKEN Portal 2004-1202

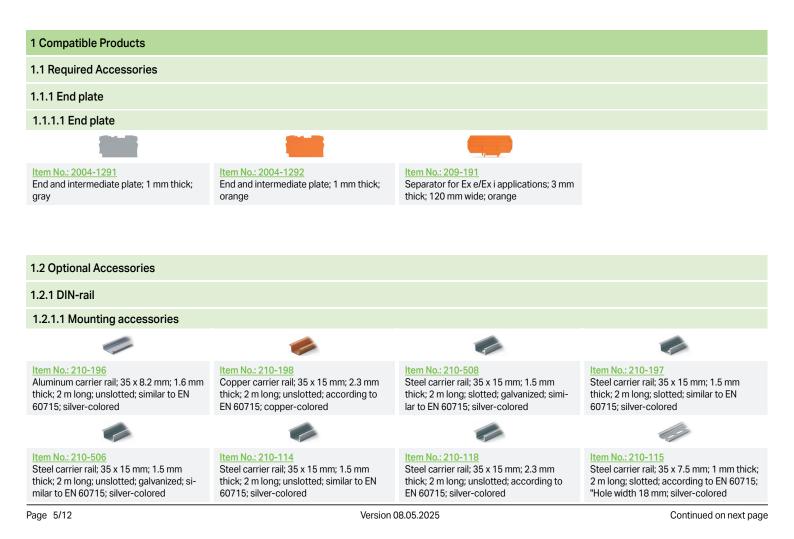

https://www.wago.com/2004-1202



#### 1.2.1.1 Mounting accessories

### Item No.: 210-112

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored

#### Item No.: 210-504

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored

## Item No.: 210-113

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored



Item No.: 216-266

46228, Part 4/09.90; blue

Ferrule; Sleeve for 2.5 mm<sup>2</sup> / AWG 14; in-

sulated; electro-tin plated; electrolytic

copper; gastight crimped; acc. to DIN

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored

#### 1.2.2 End plate

#### 1.2.2.1 End plate

Item No.: 209-190 Separator for Ex e/Ex i applications; 3 mm thick; 90 mm wide; orange

Item No.: 2004-1293 Seperator plate; 2 mm thick; oversized; gray

Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; insu-

lated; electro-tin plated; electrolytic cop-

per; gastight crimped; acc. to DIN 46228,

Item No.: 216-263

Part 4/09.90; red

Item No.: 2004-1294 Seperator plate; 2 mm thick; oversized; orange

Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; in-

sulated; electro-tin plated; electrolytic

copper; gastight crimped; acc. to DIN

46228, Part 4/09.90; black

Item No.: 216-264

1.2.3 Ferrule

#### 1.2.3.1 Ferrule

#### Item No.: 216-262

Ferrule; Sleeve for 0.75 mm<sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray

#### Item No.: 216-267

Ferrule; Sleeve for 4 mm<sup>2</sup> / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray

#### 1.2.4 Installation

1.2.4.1 Cover

Item No.: 709-156 Cover; Type 3; suitable for cover carrier, type 3; 1 m long; transparent

#### 1.2.4.2 Cover carrier



#### Item No.: 709-169

Cover carrier; Type 3; incl. fixing/retaining screws and knurled nut; suitable for 279 to 282 and 880 Series rail-mounted terminal blocks; suitable for 264 Series miniature rail-mounted terminal blocks; suitable for 270 Series sensor and actuator terminal blocks; gray

https://www.wago.com/2004-1202



#### 1.2.5 Insulation stop

#### 1.2.5.1 Insulation stop

0000

<u>Item No.: 2004-171</u> Insulation stop; 0.25 - 0.5 mm²; 5 pieces/ strip; light gray

00000

Item No.: 2004-172 Insulation stop; 0.75 - 1 mm²; 5 pieces/ strip; dark gray

#### 1.2.6 Jumper




ries; insulated; light gray






https://www.wago.com/2004-1202

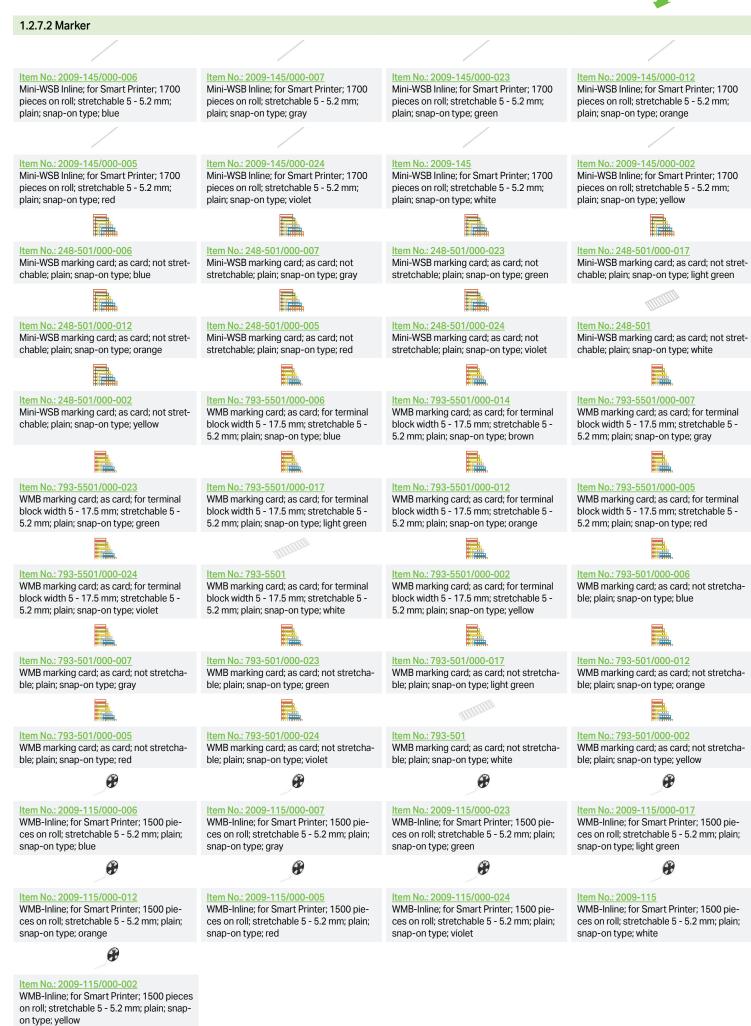

https://www.wago.com/2004-1202



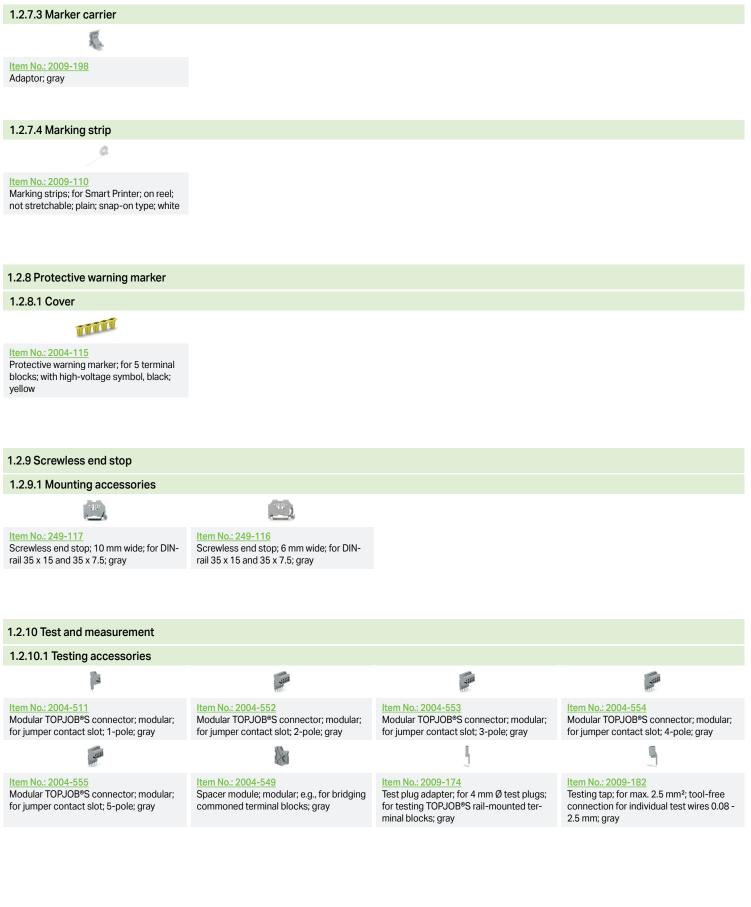

https://www.wago.com/2004-1202

# N/AGO

#### 1.2.11 Tool

multicoloured

#### 1.2.11.1 Operating tool



partially insulated shaft; angled; short;

Item No.: 210-720 Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

#### Installation Notes

#### Conductor termination



All conductor types at a glance

Push-in termination of solid and ferruled conductors




Inserting a conductor via push-in termination:

Solid conductors with cross-sections from either one size above, or up to two sizes below, the rated cross-section can be simply pushed in – no tools needed.



Inserting a conductor via operating tool: Connecting fine-stranded conductors without ferrules, or small cross-sectional conductors that cannot be pushed in, is performed similarly to the original CAGE CLAMP® – just use an operating tool. Advantage:

To open the clamp, the operating tool is inserted vertically. The conductor entry is less than 15 degrees for easier wiring.




Conductor termination - insulation stop

#### Commoning



Insert push-in type jumper bar and push down until it hits backstop.



Removing a push-in type jumper bar: Insert the operating tool between the jumper and partition wall of the dual jumper slots, then lift up the jumper. Place the operating tool in the center of jumpers for up to five contacts (see above), or alternately on both sides for jumpers with more than five contacts.

https://www.wago.com/2004-1202

#### Commoning



This star point jumper has been specially developed to create a "star point" and is used on motor terminal boards equipped with Rail-Mount Terminal Blocks TOPJOB® S.

This delta jumper has been specially developed to create a delta configuration and is used on motor terminal boards equipped with rail-mount terminal blocks TOPJOB® S.



Push down the wire jumper until fully inserted. Lift the jumper with an operating tool for rewiring.

#### Commoning



Step-down jumpers common terminal blocks of different sizes, without losing a conductor clamping point. This can be beneficial on long conductor runs where voltage drop can be a problem. A large conductor can be easily connected to smaller conductors at the distribution point.

Commoning may be made in either direction using the special thin end plate to cover the open side. Additional through terminal blocks having a smaller cross-section may be commoned using push-in type jumper bars.



Using step-down jumpers, an end plate must be inserted between the terminal blocks to be commoned.



Step-down jumper (Item No. 2006-499) commons 6/4 mm<sup>2</sup> (10/12 AWG) terminal blocks (2006/2004 Series) with 4/2.5/1.5 mm<sup>2</sup> (AWG 12/14/16) terminal blocks (2004/2002/2001 Series).




Step-down jumper (Item No. 2016-499) commons 16/10 mm<sup>2</sup> (16/8 AWG) terminal blocks (2016/2010 Series) with 10/6/4/2.5 mm<sup>2</sup> (8/10/12/14 AWG) terminal blocks (2010/2006/2004/2002 Series).



#### Stepping down via push-in type jumper bar:

Commoning via open terminal side with end plate allows jumpering over two cross-section sizes for 16 mm<sup>2</sup> (6 AWG) and 10 mm<sup>2</sup> (8 AWG) and one cross-section size for 6/4/2.5 mm<sup>2</sup> (10/12/14 AWG). An example: from 16 mm<sup>2</sup> (6 AWG) to 6 mm<sup>2</sup> (10 AWG) (see illustration above) or from 10 mm<sup>2</sup> (8 AWG) to 4 mm<sup>2</sup> (12 AWG).



#### Stepping down via push-in type jumper bar:

Commoning via closed terminal side with end plate allows jumpering over two cross-section sizes, e.g., from 16 mm<sup>2</sup> (6 AWG) to 6 mm<sup>2</sup> (10 AWG) or from 6 mm<sup>2</sup> (10 AWG) to 2.5 mm<sup>2</sup> (14 AWG) (see illustration above).



#### Note:

The total current of the outgoing circuits must not exceed the nominal current of the step-down jumper/push-in type jumper bar.

#### Testing



The modular TOPJOB® S connectors also connect conductors of the same size as the terminal blocks being used.



TOPJOB® S Connectors with a 2 mm Ø test socket for testing voltage via 2-pole voltage tester



Rail-mount terminal block assembly for electric motor wiring



Test plug adapter (Item No. 2009-174, CAT I) for 4 mm Ø plugs - compatible with 2000 to 2016 Series



https://www.wago.com/2004-1202

#### Testing





Testing tap (Item No. 2009-182) for toolfree connection of test cables up to 2.5  $mm^2$  (12 AWG) – compatible with 2000 to 2016 Series

#### Marking





Snapping WMB Inline markers into marker slots.



TOPJOB<sup>®</sup> S 2009-193 Group Marker Carrier (equipped with a marking strip) for all 2001 to 2016 Series TOPJOB<sup>®</sup> S Rail-Mount Terminal Blocks Do not use on an end plate!

#### Ex application





Through terminal blocks with a blue insu-

lated housing are suitable for Ex i applica-



All through and ground conductor terminal blocks are suitable for Ex e II applications.



Separator plate for Ex e/Ex i applications

An end plate must be applied to the terminal block located directly behind an Ex e/ Ex i separator plate.



Ex e II/Ex i terminal strip Note:

The movable feet of terminal blocks and separator plates must face the same direction.

- A separator plate is located between the Ex e II and Ex i terminal strip.
- End plate Ex e II terminal blocks Separator plate for Ex e/Ex i applications End plate
- Ex i terminal blocks

tions.

According to EN 50020, a minimum distance of 50 mm must be kept between live parts of Ex e and Ex i circuits. The use of Ex e/Ex i separators is a space-saving solution when Ex e and Ex i terminal blocks are mounted on a common DINrail.

Subject to changes. Please also observe the further product documentation!