



SMOKE + CO ALARM

120V + 10-YEAR BACKUP BATTERY

DETECT SERIES | MODEL 30CUA10-VCA | ITEM 21032774

NO LOW BATTERY CHIRPS

This alarm beeps to remind you it's time to replace it 10 years after it is powered.

VOICE ALERTS

Crystal-clear voice alerts in English and French tell you exactly why your alarm is sounding so you can react quickly.

INTERCONNECTED ALARMS[†]

When one alarm sounds, they all sound, so you never miss an emergency and can get out faster.

REDUCED NUISANCE ALARMS

Enhanced sensing technology reduces false alarms often caused by cooking.



Images are representative only.
Actual product may vary slightly.



Photoelectric +
Firmware
Technology



Description

North America's #1 home fire safety brand* is bringing you the next level of fire and carbon monoxide safety with the Kidde Combination Smoke and Carbon Monoxide Alarm model 30CUA10-VCA.

This alarm offers a modern design ideal for all living spaces. Cutting edge technology sends fast alerts that give your family more time to get out safely and enhanced sensing technology reduces false alarms often caused by cooking.

Comprehensively tested and designed to UL/ULC/CSA standards for safety and reliability, this Kidde DETECT alarm is powered by a 120V AC with 10-year backup battery so you never have to change a battery and alerts you to both smoke & carbon monoxide (CO) using a single, cost-effective device.

Plus, it's self-testing and easy to install with the included twist-and-click mounting bracket. Equipped with end-of-life notifications, the alarm will beep to remind you it's time to replace it 10 years after it is powered. This model also features voice alerts that let you know exactly why your alarm is sounding and interconnected alarm activation so you never miss an emergency and can get out faster.

Alarm Warnings – Featuring multi-color LEDs

Fire: The red LED will flash in sync with the alarm pattern (3 long beeps). The alarm will repeat this pattern until the unit is reset or smoke is eliminated.

Carbon Monoxide: The red LED will flash in sync with the alarm pattern (4 quick beeps). This continues until the unit is reset or the CO is eliminated.

End of Unit Life: Two chirps and amber LED flashes per minute.

Alarm Memory: Alerts a user if smoke or CO has been detected in the last 24 hours. If smoke has been detected, the red LED blinks every 15 sec. If CO has been detected, the red LED blinks twice every 15 sec.

Features & Benefits

- **Double the Detection** – Alerts you to both smoke & carbon monoxide (CO) using a single, cost-effective device.
- **Worry-Free 10-Year Backup Battery** – No battery changes for 10 years.* Avoids inconvenient battery replacements over the life of the device.
- **Voice Alerts** – Crystal-clear voice alerts in English and French tell you exactly why your alarm is sounding so you can react quickly.
- **Interconnected Alarms[†]** – When one alarm sounds, they all sound, so you never miss an emergency and can get out faster.
- **Self-Testing Alarms^{**}** – For added assurance, internal components ensure alarm is always operating as expected.
- **Simple Installation** – Easy install with included twist-and-click mounting bracket.
- **End-of-Life Notifications** – No low battery chirps! This alarm beeps to remind you it's time to replace it 10 years after it is powered.

*Based on total household installations as of December 2023. **Self-testing is not a substitute for a manual push test of the alarm. Perform a button test once per week to verify proper alarm operation. †10-year limited warranty on alarm. Not a battery performance claim. ‡Different models offer different interconnect options and requirements. Check the User Guide for more info.

Installation of Alarm

This model meets the latest residential smoke alarm standards, which includes enhanced resistance to nuisance alarms from cooking. Industry experts recommend that both ionization and photoelectric smoke alarms be installed to help ensure optimal detection of the various types of fires that can occur within the home. Ionization sensing alarms may detect invisible fire particles (associated with fast flaming fires) sooner than photoelectric alarms. Photoelectric sensing alarms may detect visible fire particles (associated with slow smoldering fires) sooner than ionization alarms. Industry experts recommend specific locations for smoke alarms, such as every level and sleeping area of the dwelling. They also recommend a CO alarm be installed on each level of the home — ideally on any level with fuel-burning appliances and outside of sleeping areas. The alarm can be installed on the surface of any wall or ceiling following the UL/ULC/NFPA/Manufacturer's recommended placement guidelines, on a CSA listed or recognized junction box. See User Guide for more location information and additional instructions.

All connections should be made by a qualified electrician and all wiring used shall be in accordance with codes having jurisdiction in your area. Make certain all alarms are wired to a single, continuous (non-switched) power line, which is not protected by a ground fault interrupter. A maximum of 305m (1000 ft) of wire can be used in the interconnect system. Use agency approved household wire (as required by local codes) available at all electrical supply stores and most hardware stores.

A maximum of 24 Kidde devices can be interconnected in a multiple station arrangement. The interconnect system must not exceed the NFPA (National Fire Protection Association) limit of 18 initiating devices, of which 12 can be smoke alarms. With 18 initiating devices (smoke, heat, CO, etc.) interconnected, it is still possible to interconnect 6 strobe lights and/or relay modules.

Architectural & Engineering Specifications

▲ WARNING: This product is intended for use in ordinary indoor locations of family living units. It is not designed to measure compliance with commercial or industrial standards. It is not suitable for installation in hazardous locations as defined in the local building code.

This device is designed to protect individuals from acute effects of carbon monoxide exposure. It will not fully safeguard individuals with specific medical conditions. If in doubt, consult a medical practitioner. Individuals with medical problems may consider using warning devices which provide audible and visual signals for carbon monoxide concentrations under 30 ppm.

CO alarm response times:

70 ppm: 60-240 min | 150 ppm: 10-50 min | 400 ppm: 4-15 min

The alarm shall include a test button that will electronically simulate the presence of smoke and CO and cause the unit to go into both modes of alarm. This sequence tests the unit's electronics to ensure proper operation.

The unit shall incorporate three LED colors. A green LED will be steady on when AC power is connected, or flash every 60 seconds when in the battery-only mode. An amber LED will indicate fault conditions. A red LED will flash in sync with the smoke alarm pattern, and will also indicate alarm memory.

The unit shall include the HUSH™ feature that silences a smoke alarm for approximately 8-10 minutes if a nuisance alarm condition occurs. The red LED on the alarm will flash every 2 seconds while in HUSH and will automatically reset itself.


At the date of manufacture, the unit shall at a minimum meet the requirements of ULC 531, UL 217, CSA 6.19-17, UL 2034, NFPA 72, NFPA 101 (one- and two-family dwellings).

Technical Specifications

Model:	30CUA10-VCA
Power Source:	120V AC, 60 Hz, 42mA max, with 10-year* sealed battery backup
Surge Protection:	Meets the new ULC 531 5 th edition 20kV surge test, reducing chance of electrical fire.
Smoke Sensor:	Photoelectric
CO Sensor:	Electrochemical
Audio Alarm:	85 dB at 3m (10 ft)
Temperature Range:	4.4°C (40°F) to 37.8°C (100°F)
Humidity Range:	10 to 95% relative humidity (RH), non-condensing
Size:	12.7 cm x 5.1 cm x 12.7 cm
Weight:	0.38 kg
Wiring:	AC wiring, plug-in quick connector
Interconnects:	Interconnects with up to 24 Kidde devices. Please see User Guide for list of compatible alarms. This alarm is not designed to be interconnected with other manufacturer's products, unless otherwise specified.
Warranty:	10-Year Limited Warranty (battery included)
Replacement Batteries:	N/A

Interconnect

Wiring Diagram:

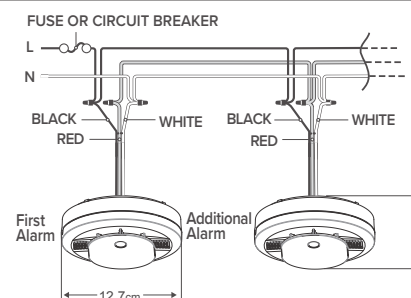

Ordering Information

Ordering Number	UPC	1 of 5	Pack Config	Master Carton Qty	Case Dimensions (w x d x h cm)	Master Carton Weight (kg)	Master Cartons/Pallet
380-21032774	047871327744	10047871327741	1 alarm in retail box	6 retail boxes	16 x 38.1 x 15.4	2.49	108
380-21033115	047871331154	10047871331151	2 alarms in retail box	3 retail boxes	16 x 38.1 x 15.4	2.44	108
380-21033116	047871331161	10047871331168	3 alarms in retail box	2 retail boxes	16 x 38.1 x 15.4	2.42	108
380-21033117	047871331178	10047871331175	6 alarms in retail box	1 retail box	15 x 36 x 15.2	2.17	114