

Date: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_  
 Name of distributor: \_\_\_\_\_  
 Client #: \_\_\_\_\_  
 Name of end user: \_\_\_\_\_



## ORDERING INFORMATION

**Order code:** 63302  
**Description:** LED/CL14/25W/30K/FM/RND/STD  
**UPC:** 69549633025  
**Case quantity:** 1  
**Luminaire description:** Round LED Ceiling Luminaire

## FEATURES AND SPECIFICATIONS

**Lens type:** Frosted Acrylic Diffuser  
**Lens benefits:** Easy to install diffuser with twist and lock.  
**Housing:** Simple, functional and low profile design.  
**Applications:** Ideal for use in closets, utility areas, hallways, bedrooms, offices & various residential and commercial applications.  
**Benefits compared to Traditional Light:** Uses less energy than fluorescent lights, lasts longer and is maintenance free.



For a complete list of ENERGY STAR qualified products, please visit [www.standardpro.com](http://www.standardpro.com)

## FIXTURE PERFORMANCE

**Wattage (W):** 25  
**Colour temperature (K):** 3 000  
**CRI:** 80  
**Average life in hours:** 50 000  
**Lumens:** 1 700  
**Efficacy with lens (LPW):** 68  
**Voltage (V):** 120  
**Hertz (Hz):** 60  
**mili Amps (mA):** 660  
**Beam angle:** 90°  
**Mounting:** Surface Mount/Flush-mount

## POWER FACTOR (PF)

0.95

## TOTAL HARMONIC DISTORTION (THD)

< 20 %

## AMBIENT OPERATING TEMPERATURES

-10°C/44°F to 40°C/104°F

## COMPATIBLE DIMMER LIST

**COOPER:** DAL06P, SAL06P and SLC03P  
**LEVITON:** Decora – 6674 and Illuma Tech IPL06  
**LUTRON:** Maestro MACL-153P, Diva DVCL-153P, Contour CTCL-153P


Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

November 10, 2016


## ORDERING INFORMATION

Order code: 63302  
 Description: LED/CL14/25W/30K/FM/RND/STD  
 UPC: 695496323025  
 Case quantity: 1  
 Luminaire description: Round LED Ceiling Luminaire

## PHOTOMETRICS - BEAM SPREAD\*

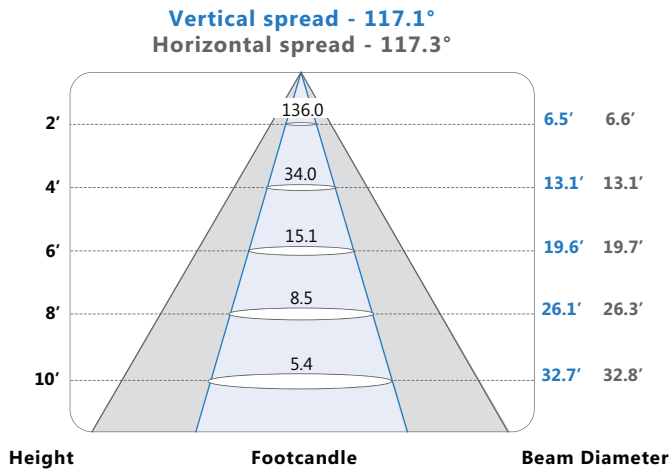

## PHOTOMETRICS - CANDELA DISTRIBUTION\*

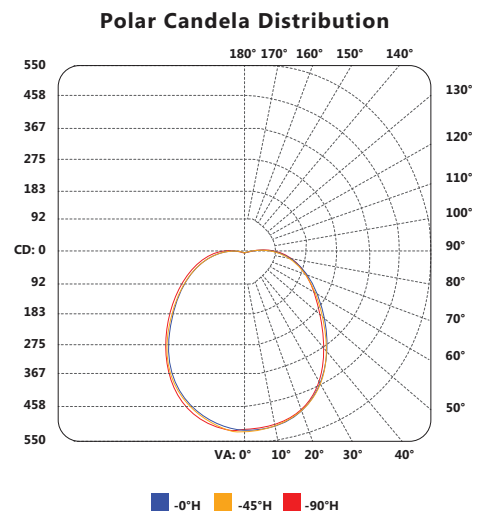

## PHOTOMETRICS - COEFFICIENTS OF UTILIZATION (ZONAL CAVITY METHOD)\*

RCC %:	80				70				50				30				10				0
RW %:	70	50	30	0	70	50	30	0	50	30	20	0	50	30	20	0	50	30	20	0	0
RCR: 0	1.17	1.17	1.17	1.17	1.13	1.13	1.13	.90	1.06	1.06	1.06		.99	.99	.99		.93	.93	.93		.90
1	1.04	.99	.94	.89	1.01	.96	.91	.72	.89	.86	.82		.84	.81	.78		.79	.76	.74		.71
2	.94	.85	.78	.71	.91	.82	.76	.59	.77	.72	.67		.72	.68	.64		.68	.64	.61		.58
3	.86	.74	.66	.59	.82	.72	.64	.50	.68	.61	.55		.63	.58	.53		.60	.55	.51		.48
4	.78	.66	.56	.49	.75	.64	.55	.43	.60	.52	.47		.56	.50	.45		.53	.48	.43		.41
5	.72	.58	.49	.42	.69	.57	.48	.37	.53	.46	.40		.50	.44	.39		.48	.42	.37		.35
6	.66	.52	.43	.37	.64	.51	.42	.32	.48	.41	.35		.46	.39	.34		.43	.37	.33		.30
7	.61	.47	.38	.32	.59	.46	.38	.29	.44	.36	.31		.41	.35	.30		.39	.33	.29		.27
8	.57	.43	.35	.29	.55	.42	.34	.26	.40	.33	.27		.38	.31	.27		.36	.30	.26		.24
9	.53	.40	.31	.26	.51	.39	.31	.23	.37	.30	.25		.35	.29	.24		.33	.28	.23		.21
10	.50	.36	.28	.23	.48	.36	.28	.21	.34	.27	.22		.32	.26	.22		.31	.25	.21		.19

### CAN ICES-005 (B) / NMB-005 (B)

This lighting equipment complies with Canadian standard ICES-005; for use in commercial applications.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.


## ORDERING INFORMATION

Order code: 63302  
 Description: LED/CL14/25W/30K/FM/RND/STD  
 UPC: 69549633025  
 Case quantity: 1  
 Luminaire description: Round LED Ceiling Luminaire

## DIMENSIONS

Length: 14" (35.56 cm)  
 Diameter: 14" (35.56 cm)  
 Width: -  
 Depth: 3.5" (8.89 cm)

## TECHNICAL DRAWINGS

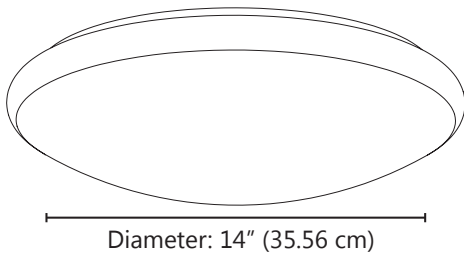

## WARNINGS

- Installation and maintenance must be performed by licensed electricians only.
- To avoid risk of electric shock, make sure to turn off main power switch prior to installation or maintenance.
- Must be installed in compliance with Canadian Electrical Code in Canada or National Electrical Code (NEC) in the US.
- Make sure input voltage and frequency are compatible with the fixture. Check installation guide for power requirements prior to installation.

**WARNING – Risk of electric shock. Suitable for damp locations.**

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_