


Date: _____
 In hands date of project: _____
 Project name/Number: _____
 Name of distributor: _____
 Client #: _____
 Name of end user: _____

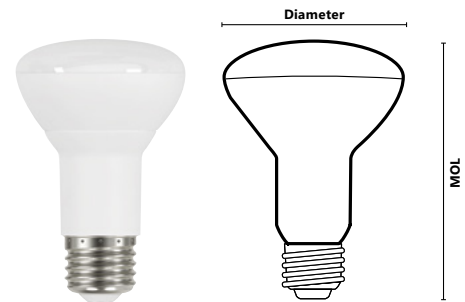

MOL : 3 13/16 in. (97 mm) Dia. : 2 15/32 in. (63 mm)

ORDERING INFORMATION

Order code: 63600
 Description: LED/BR20/8W/27K/STD
 UPC: 069549636002
 Case quantity: 20

PERFORMANCE DATA

Shape: BR20
 Wattage (W): 8
 Base: E26
 Lamp voltage (VAC): 120
 Colour temperature (K)**: 2 700
 Average life (L70 hours): 25 000
 Initial lumens (lm)*: 500
 Initial lumens per watt (lm/W): 62.5
 CRI: 80
 Beam angle: 120
 Power factor: 0.9
 Operating temperature range: -20 °C/-4 °F to 45 °C/113 °F

*Initial lumens range: +/- 10 %

**Typical colour temperature range: +/- 5 %



DIMMER COMPATIBILITY LIST

Legrand:	HCL453P
Cooper:	DAL06P, SAL06P, SLC03P
Leviton:	DSM10-1LZ
Lutron:	CTCL-153P, DVELV-300P, SELV-300P, NTELV-600

CAUTIONS

- Risk of electric shock, for use in dry locations only.
- Suitable for use in open luminaires.
- For complete dimmer compatibility and warranty information visit www.standardpro.com
- Operating temperature: -20 °C/-4 °F to 40 °C/104 °F

NOTES: This device complies with Part 15 of the FCC rules and has been tested and found to comply with the limits for a Class B digital device. This product may cause interference with other devices. If interference occurs, change the location of the product. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment. This RFLD device complies with Canadian ICES-003. LED lamps must be stored, operated under suitable environmental conditions and in accordance with, but not limited to, the latest National Electrical Code, cETLus, cULus, CSA and ANSI specifications.

Qty	Description	Price

I accept the specifications of the lamp configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.