


INDUSTRIAL SPEC GRADE TURNLOK® LOCKING DEVICES


L630C & L630P Connector & Plug

- A. Raised ribs** provide non-slip gripping profile for turning to lock and unlock.
- B. Quick-thread assembly screws** and cord-grip screws come backed-out, ready-to-wire.
- C. Industrial-strength, brass alloy plug blades**, and connector contacts resist heat rise, provide excellent conductivity.
- D. Rounded back contour** reduces snags and hang-ups on the job site.
- E. Impact- and corrosion-resistant** durable nylon 6 shell material.
- F. Integral flexible rubber cord grommet** conforms to and seals around SO cord to provide protection from oils, water, or chips entering wiring chamber.
- G. New-design external cord grips** provide visible assurance of safe and proper cord retention.
- H. Scallop shell design** provides non-slip gripping surface for insertion and withdrawal.
- I. Double dovetail design** provides superior protection against cord pull-out forces.
- J. Visible stamped NEMA configuration and device rating.**

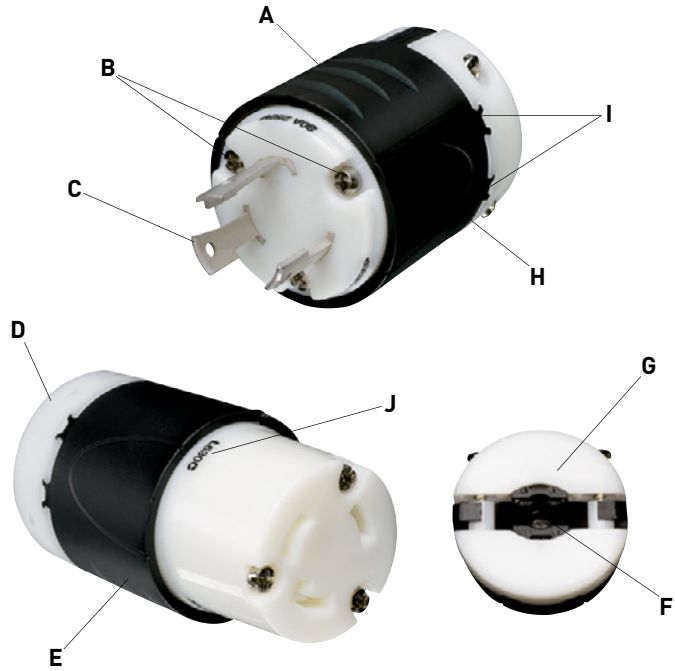

L630R Receptacles

- A. Compact, impact-resistant nylon face and body** are ultrasonically welded together for unrivaled strength.
- B. Clearly marked NEMA configuration, rating, and third party listing** on each unit's face.
- C. One-piece, high-grade brass contacts** offer excellent conductivity and heat-rise resistance.
- D. Single-piece, solid brass mounting strap** is free of easily loosened rivets found on other brands.
- E. Side and external screw-pressure-plate back wire capability.** Accepts #14 - #10 AWG.

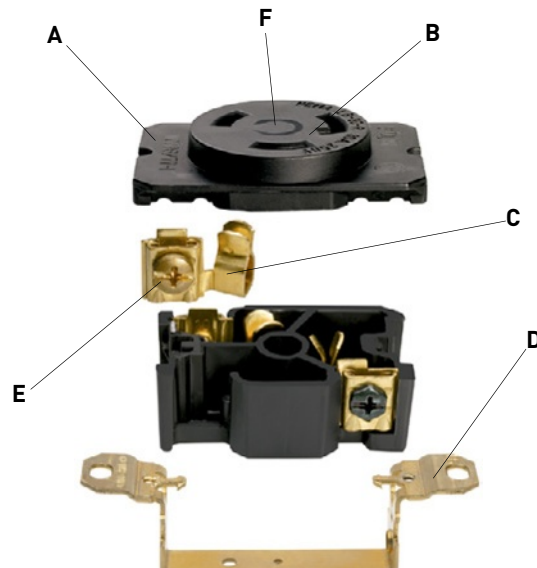

F. P&S Turnlok Receptacles. Voltage color coding on the outside. Proven designs and quality materials on the inside. Any way you look at them, they're the standard of the industry.



INDUSTRIAL SPEC GRADE TURNLOK® LOCKING DEVICES

NEMA Configurations

Locking Plugs & Receptacles

	15 AMPERE		20 AMPERE		30 AMPERE		
	RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG	
2 POLE, 2 WIRE NON-GROUNDING							
125V	L1		L1-15P				
	L2						
250V			L2-20P				
2 POLE, 3 WIRE GROUNDING							
125V	L5		L5-15P		L5-20R		
	L6		L6-15P		L6-20R		
250V	L6		L6-15P		L6-20P		
	L7		L7-15P		L7-20R		
277VAC	L7		L7-15P		L7-20P		
347VAC	L24			L24-20R		L24-20P	
	L8			L8-20R		L8-20P	
480VAC	L8			L8-20R		L8-20P	
600VAC	L9			L9-20R		L9-20P	
	L9			L9-20R		L9-20P	
600VAC	L9			L9-20R		L9-20P	
	L9			L9-20R		L9-20P	
3 POLE, 3 WIRE NON-GROUNDING							
125/250V	L10			L10-20R		L10-20P	
	L11			L11-20R		L11-20P	
3ø250V	L11			L11-20R		L11-20P	
3ø480V	L12			L12-20R		L12-20P	
	L13			L12-20R		L12-20P	
3ø600V	L13			L12-20R		L12-20P	
3ø600V	L13			L12-20R		L12-20P	
	L13			L12-20R		L12-20P	
3 POLE, 4 WIRE GROUNDING							
125/250V	L14			L14-20R		L14-20P	
	L15			L15-20R		L15-20P	
3ø250V	L15			L15-20R		L15-20P	
3ø480V	L16			L16-20R		L16-20P	
	L17			L16-20R		L16-20P	
3ø600V	L17			L16-20R		L16-20P	
4 POLE, 4 WIRE NON-GROUNDING							
3øY 120/208V	L18			L18-20R		L18-20P	
	L19			L19-20R		L19-20P	
3øY 277/480V	L19			L19-20R		L19-20P	
3øY 347/600V	L20			L20-20R		L20-20P	
	L20			L20-20R		L20-20P	
4 POLE, 5 WIRE GROUNDING							
3øY 120/208V	L21			L21-20R		L21-20P	
	L22			L22-20R		L22-20P	
3øY 277/480V	L22			L22-20R		L22-20P	
3øY 347/600V	L23			L23-20R		L23-20P	
	L23			L23-20R		L23-20P	

Midget – Locking


	15 AMPERE	
	RECEPTACLE	PLUG
2 POLE, 2 WIRE NON-GROUNDING		
125V	ML1	
	ML1	
2 POLE, 3 WIRE GROUNDING		
125V	ML2	
	ML2	
3 POLE, 3 WIRE NON-GROUNDING		
125/250V	ML3	
	ML3	

Labels & Their Meaning

X, Y, Z	Hot Lead
W	Neutral Lead
G	Grounding Lead

Open Slots

Indicate receptacle configurations (female).




Closed Slots

Indicate plug blade configurations (male).



INDUSTRIAL SPEC GRADE TURNLOK® LOCKING DEVICES


30 Amp NEMA L1430 & L1530 3 Pole, 4 Wire 30A, 125/250V; 3ø, 250V




30A Receptacle



30A Connector




30A Plug

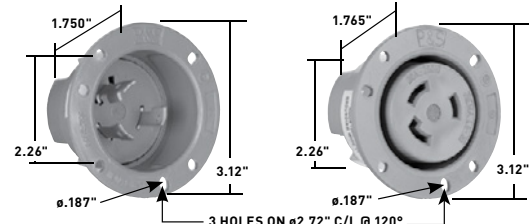

30A Flanged Inlet & Outlet

CATALOG NUMBER	RATING		DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
	A.	V.				UL UL498	FSUL WC596	CSA
RECEPTACLES								
L1430R	30	125/250	Single Receptacle		L14-30R	•	•	•
IGL1430R	30	125/250	Single Receptacle, Orange, Isolated Ground		L14-30R	•	•	•
L1530R	30	3ø, 250	Single Receptacle		L15-30R	•	•	•
IGL1530R	30	3ø, 250	Single Receptacle, Orange, Isolated Ground		L15-30R	•	•	•
CONNECTORS IP20 SUITABILITY								
L1430C	30	125/250	Black Back, White Front Body	.225"-1.150"	L14-30R	•	•	•
CRL1430C	30	125/250	Yellow Back, White Front Body, Corrosion Resistant	.225"-1.150"	L14-30R	•	•	•
L1530C	30	3ø, 250	Black Back, White Front Body	.225"-1.150"	L15-30R	•	•	•
PLUGS IP20 SUITABILITY								
L1430P	30	125/250	Black Back, White Front Body	.225"-1.150"	L14-30P	•	•	•
CRL1430P	30	125/250	Yellow Back, White Front Body, Corrosion Resistant	.225"-1.150"	L14-30P	•	•	•
L1530P	30	3ø, 250	Black Back, White Front Body	.225"-1.150"	L15-30P	•	•	•
FLANGED INLETS & OUTLETS								
L1430FI	30	125/250	Gray Inlet		L14-30P	•	•	•
L1430FO	30	125/250	Gray Outlet		L14-30R	•	•	•
L1530FI	30	3ø, 250	Gray Inlet		L15-30P	•	•	•
L1530FIBK	30	3ø, 250	Black Inlet		L15-30P	•	•	•
L1530FO	30	3ø, 250	Gray Outlet		L15-30R	•	•	•
L1530FOBK	30	3ø, 250	Black Outlet		L15-30R	•	•	•



Reference Pages G-38 and G-39 for Accessories.

CATALOG NUMBER	DESCRIPTION
WEATHERPROOF LOCKING INLET KIT FOR GENERATOR APPLICATIONS	
L1430FIKIT	Kit includes 30A Locking Gray Flanged Inlet L1430FI, Weatherproof Cover WPG2, and Weatherproof Box WPB33

CATALOG NUMBER	DESCRIPTION	COLOR
WEATHERPROOF COVER		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
STAINLESS STEEL WALL PLATE		
SS720	Wall Plate for Locking Receptacles	302/304 S/S



WPG2

All devices listed on this page conform to NEMA WD-1 and WD-6.