# CADDY ROD LOCK Strut Nut – CRLSL37EG



- Allows for the quick creation, installation, and adjustment of multi-level trapeze assemblies
- Installs in strut profiles without the need to insert fingers or tools into the strut
- Easy "push-to-install" design allows installers to simply push the threaded rod through the mounting hole, instantly holding it in position
- Integrated adjustment nut enables fine tuning the system height up or down
- Lock nut can be finger tightened, locking the rod in place
- Accommodates slight variances in rod-to-rod position of the trapeze
- Can be used to prefabricate assemblies which can be quickly pushed onto previously installed threaded rods
- Works with slightly damaged threads and minor burrs on the threaded rod
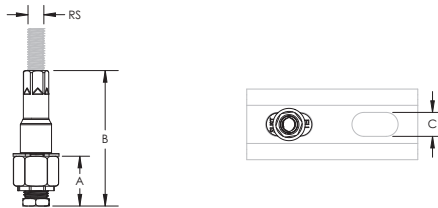


| Part Number | CRLSL37EG |
|---|---|
| Material | Steel |
| Finish | Electrogalvanized |
| Strut Type | A (1 5/8" x 1 5/8") |
| Rod Size (RS) | 3/8" |
| A | 1.19" |
| B | 3.23" |
| C | 9/16" |
| Wrench Size 1 | 15/16" |
| Wrench Size 2 | 14 mm |
| Standard Packaging Quantity | 20 pc |
| UPC | 78285684148 |

Wrench Size 1 represents CADDY ROD LOCK hex nut size. Wrench Size 2 represents stem nut size.
Must be installed with the open side of the strut channel facing up.
CADDY ROD LOCK Strut Nuts must be installed at a minimum of 1" (25.4 mm) from both ends of the strut channel.