Pushbuttons and Indicating Lights

22.5 mm Compact Pushbuttons—C22

Pushbuttons—Non-Illuminated and Illuminated



Contents

Description	Page
Pushbuttons—Non-Illuminated and Illuminated	
Non-Illuminated, Flush, Momentary	V7-T1-141
Non-Illuminated, Flush, Maintained	V7-T1-142
Non-Illuminated, Extended, Momentary	V7-T1-143
Non-Illuminated, Extended, Maintained	V7-T1-144
Illuminated, Flush, Momentary	V7-T1-145
Illuminated, Flush, Maintained	V7-T1-146
Illuminated, Extended, Momentary	V7-T1-147
Illuminated, Extended, Maintained	V7-T1-148
Indicating Lights	V7-T1-149
Emergency Stops	V7-T1-151
Selector Switches	V7-T1-154
Technical Data and Specifications	V7-T1-159
Dimensions	V7-T1-161

Pushbuttons—Non-Illuminated and Illuminated

Product Description

Eaton's C22 Compact Pushbuttons are a complete line of monoblock type pushbuttons with the contact blocks, mounting adapter, and operator all-in-one. The C22 pushbuttons offer the same look and feel as their modular counterpart, the M22. They also carry many of the same rugged ratings and options, such as laser etching, field convertibility, and LED technology.

Note: For additional accessories, please see Pages V7-T1-111 to V7-T1-117, 22.5 mm Modular Pushbuttons—M22 Accessories.

Features

- Field convertible maintained pushbuttons from maintained to momentary
- LED offering only for improved brightness quality and up to 100,000 hours of operation
- Laser engraved pushbuttons and lenses
- Pushbuttons (momentary) rated for 5 million mechanical operations

Protection Type


- IP67/IP69K
- NEMA 4X, 13

22.5 mm Compact Pushbuttons—C22

Catalog Number Selection

Catalog Number Selection is for illustrative purposes only and not to be used to create new catalog numbers.

Non-Illuminated Pushbuttons

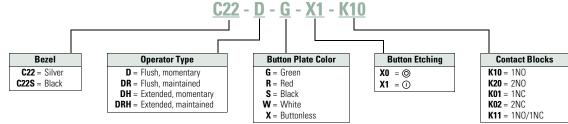

Product Selection

Non-Illuminated, Flush, Momentary

Non-Illuminated Pushbuttons, Flush, Momentary

(S)-D			ittons, Flush, Mo		
	Button Color	Button Etching	Contact Block Configuration	Silver Bezel Catalog Number	Black Bezel Catalog Number
	Green	_	1N0	C22-D-G-K10	C22S-D-G-K10
		_	2N0	C22-D-G-K20	C22S-D-G-K20
			1N0/1NC	C22-D-G-K11	C22S-D-G-K11
		X1	1N0	C22-D-G-X1-K10	C22S-D-G-X1-K10
		X1	2N0	C22-D-G-X1-K20	C22S-D-G-X1-K20
		X1	1N0/1NC	C22-D-G-X1-K11	C22S-D-G-X1-K11
	Red	_	1NC	C22-D-R-K01	C22S-D-R-K01
		_	2NC	C22-D-R-K02	C22S-D-R-K02
			1N0/1NC	C22-D-R-K11	C22S-D-R-K11
		X0	1NC	C22-D-R-X0-K01	C22S-D-R-X0-K01
		X0	2NC	C22-D-R-X0-K02	C22S-D-R-X0-K02
		XO	1N0/1NC	C22-D-R-X0-K11	C22S-D-R-X0-K11
	Black	_	1NC	C22-D-S-K01	C22S-D-S-K01
		_	2NC	C22-D-S-K02	C22S-D-S-K02
		_	1N0/1NC	C22-D-S-K11	C22S-D-S-K11
		XO	1NC	C22-D-S-X0-K01	C22S-D-S-X0-K01
		XO	2NC	C22-D-S-X0-K02	C22S-D-S-X0-K02
		XO	1N0/1NC	C22-D-S-X0-K11	C22S-D-S-X0-K11
	White		1N0	C22-D-W-K10	C22S-D-W-K10
			2N0	C22-D-W-K20	C22S-D-W-K20
		_	1N0/1NC	C22-D-W-K11	C22S-D-W-K11
		X1	1N0	C22-D-W-X1-K10	C22S-D-W-X1-K10
		X1	2N0	C22-D-W-X1-K20	C22S-D-W-X1-K20
		X1	1N0/1NC	C22-D-W-X1-K11	C22S-D-W-X1-K11
	Buttonless		1N0	C22-D-X-K10	C22S-D-X-K10
			2N0	C22-D-X-K20	C22S-D-X-K20
			1NC	C22-D-X-K01	C22S-D-X-K01
			2NC	C22-D-X-K02	C22S-D-X-K02
			1N0/1NC	C22-D-X-K11	C22S-D-X-K11


Pushbuttons and Indicating Lights

22.5 mm Compact Pushbuttons—C22

Non-Illuminated, Flush, Maintained

Non-Illuminated Pushbuttons, Flush, Maintained

C22(S)-DR	Non-Illum	Non-Illuminated Pushbuttons, Flush, Maintained					
	Button Color	Button Etching	Contact Block Configuration	Silver Bezel Catalog Number	Black Bezel Catalog Number		
	Green		1N0	C22-DR-G-K10	C22S-DR-G-K10		
		_	2N0	C22-DR-G-K20	C22S-DR-G-K20		
		_	1N0/1NC	C22-DR-G-K11	C22S-DR-G-K11		
		X1	1N0	C22-DR-G-X1-K10	C22S-DR-G-X1-K10		
		X1	2N0	C22-DR-G-X1-K20	C22S-DR-G-X1-K20		
		X1	1N0/1NC	C22-DR-G-X1-K11	C22S-DR-G-X1-K11		
\mathbf{O}	Red	_	1NC	C22-DR-R-K01	C22S-DR-R-K01		
			2NC	C22-DR-R-K02	C22S-DR-R-K02		
		_	1N0/1NC	C22-DR-R-K11	C22S-DR-R-K11		
		XO	1NC	C22-DR-R-X0-K01	C22S-DR-R-X0-K01		
		XO	2NC	C22-DR-R-X0-K02	C22S-DR-R-X0-K02		
		X0	1N0/1NC	C22-DR-R-X0-K11	C22S-DR-R-X0-K11		
	Black	_	1NC	C22-DR-S-K01	C22S-DR-S-K01		
			2NC	C22-DR-S-K02	C22S-DR-S-K02		
			1N0/1NC	C22-DR-S-K11	C22S-DR-S-K11		
		X0	1NC	C22-DR-S-X0-K01	C22S-DR-S-X0-K01		
		X0	2NC	C22-DR-S-X0-K02	C22S-DR-S-X0-K02		
		X0	1N0/1NC	C22-DR-S-X0-K11	C22S-DR-S-X0-K11		
	White		1N0	C22-DR-W-K10	C22S-DR-W-K10		
			2N0	C22-DR-W-K20	C22S-DR-W-K20		
			1N0/1NC	C22-DR-W-K11	C22S-DR-W-K11		
		X1	1N0	C22-DR-W-X1-K10	C22S-DR-W-X1-K10		
		X1	2N0	C22-DR-W-X1-K20	C22S-DR-W-X1-K20		
		X1	1N0/1NC	C22-DR-W-X1-K11	C22S-DR-W-X1-K11		
	Buttonless		1N0	C22-DR-X-K10	C22S-DR-X-K10		
	Battomous		2N0	C22-DR-X-K20	C22S-DR-X-K20		
			1NC	C22-DR-X-K01	C22S-DR-X-K01		
			2NC	C22-DR-X-K02	C22S-DR-X-K02		
			2110	022-DII-V-II05	OFFO-DIL-V-IVOF		



Note: Maintained pushbuttons can be converted in the field to momentary operation by switching the locking ring, which is accessible through the side of the operator body.