

**PHILIPS**  
**Day-Brite**  
**CFI**

Linear

FluxStream EZ LED strip

4', 4000 lumens



Project: \_\_\_\_\_

Location: \_\_\_\_\_

Cat.No: \_\_\_\_\_

Type: \_\_\_\_\_

Lumens: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

Philips Day-Brite / CFI FluxStream EZ LED Strip is a high performing luminaire delivering smooth diffuse light ideal for light industrial, commercial and residential applications with the unparalleled energy efficiency of Philips LED lighting.

**Ordering guide**

**Example: FSSEZ440L840-UNV**

Series	Length (nominal)	Lumens <sup>1</sup> (nominal)	Color temp. (K)	Voltage	Options
<input type="text" value="FSSEZ"/>	<input type="text" value="4"/>	<input type="text" value="40L"/>	<input type="text" value="840"/> -	<input type="text" value="UNV"/> -	<input type="text"/>
FSSEZ FluxStream strip EZ	4 4' length	40L 4000 lumens	830 80 CRI, 3000K 835 80 CRI, 3500K 840 80 CRI, 4000K	UNV Universal voltage 120-277	<b>EMLED</b> Factory wired Philips Bodine BSL310LP integral emergency pack. Nominal 1100 lm <b>LSXR10</b> 120-347V motion sensor, factory installed on end cap

1. Nominal delivered lumens at 25°C ambient.

**Accessories (order separately)**

- **FSSD4L** - 4' Diffuse replacement lens
- **LSXR10** - Low bay PIR motion sensor, 120-277V
- **FSSWG4** - 4' Wire guard
- **FSTH** - Sliding hanger bracket (set of 2)
- (See last page for details and more options)

**General notes**

Many luminaire components, such as reflectors, refractors, lenses, sockets, lampholders, and LEDs are made from various types of plastics which can be adversely affected by airborne contaminants. If sulfur based chemicals, petroleum based products, cleaning solutions, or other contaminants are expected in the intended area of use, consult factory for compatibility.



# FSSEZ FluxStream strip EZ LED

4', 4000 lumens

---

## Features

- Compact design for installation in tight spaces
- Frosted acrylic diffuser provides wide light distribution and superior glare control
- Diffuser and LED plate snap into place allowing tool-free access to LED boards and driver
- Up to 50,000 hour predicted L70 LED lumen maintenance provides long service life to reduce maintenance costs
- Can be surface mounted on ceilings or walls, or suspended via chain, pendants or cables
- Wall mountable - ADA compliant
- Ideal for cold applications (-20°C)
- Continuous row mounting using standard end caps. No extra parts needed
- 7/8" knock out provided at each end and on base of luminaire. Note: Center knockout is covered and not useable in 4' version with EMLED option.
- Enclosed lens minimizes penetration of dust, insects, and other debris into the LED compartment.
- Fluxstream luminaires are Designlights Consortium® qualified. Please see the DLC QPL list for exact catalog numbers (<http://www.designlights.org/QPL>).
- 5 year manufacturer's limited warranty Visit [www.philips.com/warranties](http://www.philips.com/warranties) for complete warranty information.

## Finish

- Baked white acrylic matte high reflectance paint finish

## Shielding

- Contoured frosted acrylic lens

## Electrical

- LED boards and drivers are RoHS (Restriction of Hazardous Substances) compliant. Total system life rated at 50,000 hours. Predicted L70 lifetime based on LED manufacturer's supplied LM-80 data and in-situ laboratory testing.

## Materials

- Heavy gauge cold rolled steel housing and end caps

## Labels

- cETLus listed (-20°C to 25°C)
- Suitable for damp locations



# FSSEZ FluxStream strip EZ LED

4', 4000 lumens

## Performance data

Fixture	Lumens	Wattage	Efficacy
FSSEZ440L840	3653lm	32W	114lm/w

## Dimensions

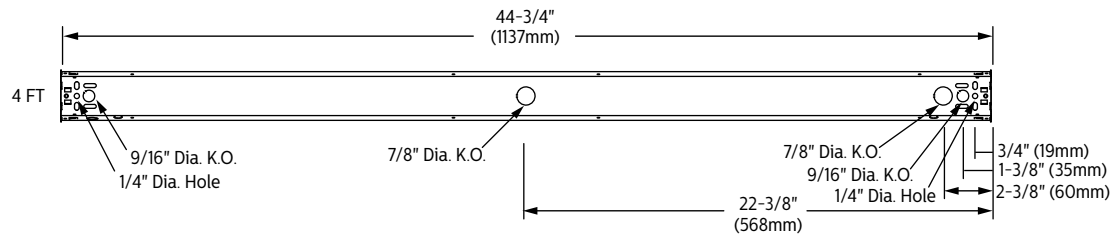

# FSSEZ FluxStream strip EZ LED

4', 4000 lumens

## Photometry

### 4' FluxStream EZ strip LED, 4000 nominal delivered lumens

LER - 114

<p><b>Catalog No.</b> FSSEZ440L840-UNV</p> <p><b>Test No.</b> 37445</p> <p><b>S/MH</b> 1.3</p> <p><b>Lamp Type</b> LED</p> <p><b>Lumens</b> 3653</p> <p><b>Input Watts</b> 32</p> <p>Comparative yearly lighting energy cost per 1000 lumens – \$2.11 based on 3000 hrs. and \$.08 pwr KWH.</p> <p>The photometric results were obtained in the Philips Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology.</p> <p>Photometric values based on test performed in compliance with LM-79.</p>	<p style="text-align: center;"><b>Candlepower</b></p> <table border="1"> <thead> <tr> <th>Angle</th> <th>End</th> <th>45</th> <th>Cross</th> <th>Back-45</th> </tr> </thead> <tbody> <tr><td>0</td><td>1050</td><td>1050</td><td>1050</td><td>1050</td></tr> <tr><td>5</td><td>1031</td><td>1045</td><td>1053</td><td>1045</td></tr> <tr><td>15</td><td>989</td><td>1010</td><td>1025</td><td>1010</td></tr> <tr><td>25</td><td>904</td><td>938</td><td>967</td><td>938</td></tr> <tr><td>35</td><td>786</td><td>837</td><td>881</td><td>837</td></tr> <tr><td>45</td><td>647</td><td>726</td><td>782</td><td>726</td></tr> <tr><td>55</td><td>493</td><td>587</td><td>667</td><td>587</td></tr> <tr><td>65</td><td>309</td><td>421</td><td>545</td><td>421</td></tr> <tr><td>75</td><td>155</td><td>303</td><td>398</td><td>303</td></tr> <tr><td>85</td><td>29</td><td>204</td><td>298</td><td>204</td></tr> </tbody> </table>	Angle	End	45	Cross	Back-45	0	1050	1050	1050	1050	5	1031	1045	1053	1045	15	989	1010	1025	1010	25	904	938	967	938	35	786	837	881	837	45	647	726	782	726	55	493	587	667	587	65	309	421	545	421	75	155	303	398	303	85	29	204	298	204	<p><b>Light Distribution</b></p> <table border="1"> <thead> <tr> <th>Degrees</th> <th>Lumens</th> <th>% Luminaire</th> </tr> </thead> <tbody> <tr><td>0-30</td><td>817</td><td>22.4</td></tr> <tr><td>0-40</td><td>1341</td><td>36.7</td></tr> <tr><td>0-60</td><td>2416</td><td>66.1</td></tr> <tr><td>0-90</td><td>3357</td><td>91.9</td></tr> <tr><td>90-180</td><td>296</td><td>8.1</td></tr> <tr><td>0-180</td><td>3653</td><td>100</td></tr> </tbody> </table>	Degrees	Lumens	% Luminaire	0-30	817	22.4	0-40	1341	36.7	0-60	2416	66.1	0-90	3357	91.9	90-180	296	8.1	0-180	3653	100	<p><b>Average Luminance</b></p> <table border="1"> <thead> <tr> <th>Zone</th> <th>End</th> <th>45°</th> <th>Cross</th> </tr> </thead> <tbody> <tr><td>45</td><td>13707</td><td>11958</td><td>11915</td></tr> <tr><td>55</td><td>12754</td><td>10817</td><td>11115</td></tr> <tr><td>65</td><td>10675</td><td>9122</td><td>10361</td></tr> <tr><td>75</td><td>8488</td><td>8267</td><td>9143</td></tr> <tr><td>85</td><td>4081</td><td>7810</td><td>8995</td></tr> </tbody> </table>	Zone	End	45°	Cross	45	13707	11958	11915	55	12754	10817	11115	65	10675	9122	10361	75	8488	8267	9143	85	4081	7810	8995																																		
Angle	End	45	Cross	Back-45																																																																																																																																					
0	1050	1050	1050	1050																																																																																																																																					
5	1031	1045	1053	1045																																																																																																																																					
15	989	1010	1025	1010																																																																																																																																					
25	904	938	967	938																																																																																																																																					
35	786	837	881	837																																																																																																																																					
45	647	726	782	726																																																																																																																																					
55	493	587	667	587																																																																																																																																					
65	309	421	545	421																																																																																																																																					
75	155	303	398	303																																																																																																																																					
85	29	204	298	204																																																																																																																																					
Degrees	Lumens	% Luminaire																																																																																																																																							
0-30	817	22.4																																																																																																																																							
0-40	1341	36.7																																																																																																																																							
0-60	2416	66.1																																																																																																																																							
0-90	3357	91.9																																																																																																																																							
90-180	296	8.1																																																																																																																																							
0-180	3653	100																																																																																																																																							
Zone	End	45°	Cross																																																																																																																																						
45	13707	11958	11915																																																																																																																																						
55	12754	10817	11115																																																																																																																																						
65	10675	9122	10361																																																																																																																																						
75	8488	8267	9143																																																																																																																																						
85	4081	7810	8995																																																																																																																																						
		<p><b>Coefficients of Utilization</b></p> <p>EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)</p> <table border="1"> <thead> <tr> <th>pfc =</th> <th colspan="2">20</th> <th colspan="2">80</th> <th colspan="2">70</th> <th colspan="2">50</th> </tr> <tr> <th>Ceil</th> <th colspan="2"></th> <th colspan="2"></th> <th colspan="2"></th> <th colspan="2"></th> </tr> <tr> <th>Wall</th> <th>70</th> <th>50</th> <th>30</th> <th>70</th> <th>50</th> <th>30</th> <th>50</th> <th>30</th> </tr> <tr> <th>RCR</th> <th colspan="8"></th> </tr> </thead> <tbody> <tr><td>0</td><td>117</td><td>117</td><td>117</td><td>113</td><td>113</td><td>113</td><td>107</td><td>107</td></tr> <tr><td>1</td><td>105</td><td>98</td><td>93</td><td>101</td><td>95</td><td>92</td><td>91</td><td>86</td></tr> <tr><td>2</td><td>94</td><td>85</td><td>78</td><td>91</td><td>82</td><td>76</td><td>78</td><td>72</td></tr> <tr><td>3</td><td>85</td><td>75</td><td>66</td><td>82</td><td>72</td><td>65</td><td>68</td><td>61</td></tr> <tr><td>4</td><td>79</td><td>66</td><td>56</td><td>76</td><td>64</td><td>56</td><td>60</td><td>53</td></tr> <tr><td>5</td><td>71</td><td>58</td><td>48</td><td>68</td><td>56</td><td>47</td><td>54</td><td>46</td></tr> <tr><td>6</td><td>67</td><td>53</td><td>44</td><td>64</td><td>51</td><td>42</td><td>48</td><td>40</td></tr> <tr><td>7</td><td>61</td><td>47</td><td>39</td><td>58</td><td>46</td><td>38</td><td>44</td><td>36</td></tr> <tr><td>8</td><td>56</td><td>44</td><td>34</td><td>55</td><td>41</td><td>34</td><td>40</td><td>33</td></tr> <tr><td>9</td><td>54</td><td>40</td><td>32</td><td>52</td><td>39</td><td>30</td><td>36</td><td>29</td></tr> <tr><td>10</td><td>50</td><td>37</td><td>29</td><td>48</td><td>36</td><td>28</td><td>34</td><td>27</td></tr> </tbody> </table>	pfc =	20		80		70		50		Ceil									Wall	70	50	30	70	50	30	50	30	RCR									0	117	117	117	113	113	113	107	107	1	105	98	93	101	95	92	91	86	2	94	85	78	91	82	76	78	72	3	85	75	66	82	72	65	68	61	4	79	66	56	76	64	56	60	53	5	71	58	48	68	56	47	54	46	6	67	53	44	64	51	42	48	40	7	61	47	39	58	46	38	44	36	8	56	44	34	55	41	34	40	33	9	54	40	32	52	39	30	36	29	10	50	37	29	48	36	28	34	27
pfc =	20		80		70		50																																																																																																																																		
Ceil																																																																																																																																									
Wall	70	50	30	70	50	30	50	30																																																																																																																																	
RCR																																																																																																																																									
0	117	117	117	113	113	113	107	107																																																																																																																																	
1	105	98	93	101	95	92	91	86																																																																																																																																	
2	94	85	78	91	82	76	78	72																																																																																																																																	
3	85	75	66	82	72	65	68	61																																																																																																																																	
4	79	66	56	76	64	56	60	53																																																																																																																																	
5	71	58	48	68	56	47	54	46																																																																																																																																	
6	67	53	44	64	51	42	48	40																																																																																																																																	
7	61	47	39	58	46	38	44	36																																																																																																																																	
8	56	44	34	55	41	34	40	33																																																																																																																																	
9	54	40	32	52	39	30	36	29																																																																																																																																	
10	50	37	29	48	36	28	34	27																																																																																																																																	

## Accessories



Accessory Catalog Code	Description	
FSTH	Sliding hanger bracket (pair)	
SV5F12	12" Stem and canopy kit	White stem and canopy kit, 1/4" trade size (1/2" O.D.) locknuts included. Works with 9/16" k.O. on base of housing.
SV5F18	18" Stem and canopy kit	
SV5F24	24" Stem and canopy kit	
SV5F36	36" Stem and canopy kit	
SV5F48	48" Stem and canopy kit	
FKR-126	Chain hanger set (pair)	Includes two 5' heavy duty link chains with "V" hooks. Attaches to base of housing.
DACHxx	Adjustable cable hanger kit (single)	Works with 1/4" hole on base of housing or FSTH hanger bracket.  xx=cable length in inches, enter 48" to 180" lengths in 12" increments
DACHxx-1-SC	Adjustable cable hanger kit with white straight 18/3 cord (single)	
DACHxx-1-CC	Adjustable cable hanger kit with white coiled 18/3 cord (single)	
DACHxx-2-SC	Adjustable cable hanger kit with white straight 18/4 cord (single)	
DACHxx-2-CC	Adjustable cable hanger kit with white coiled 18/4 cord (single)	
LSXR10	Low bay pir motion sensor (120-277v)	
FSSWG4	4' Wire guard	
FSSD4L	4' Diffuse replacement lens	

© 2017 Philips Lighting Holding B.V. All rights reserved. Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication. philips.com/luminaires



Philips Lighting North America Corporation  
200 Franklin Square Drive, Somerset, NJ 08873  
Tel. 855-486-2216

Philips Lighting Canada Ltd.  
281 Hillmount Rd, Markham, ON, Canada L6C 2S3  
Tel. 800-668-9008