
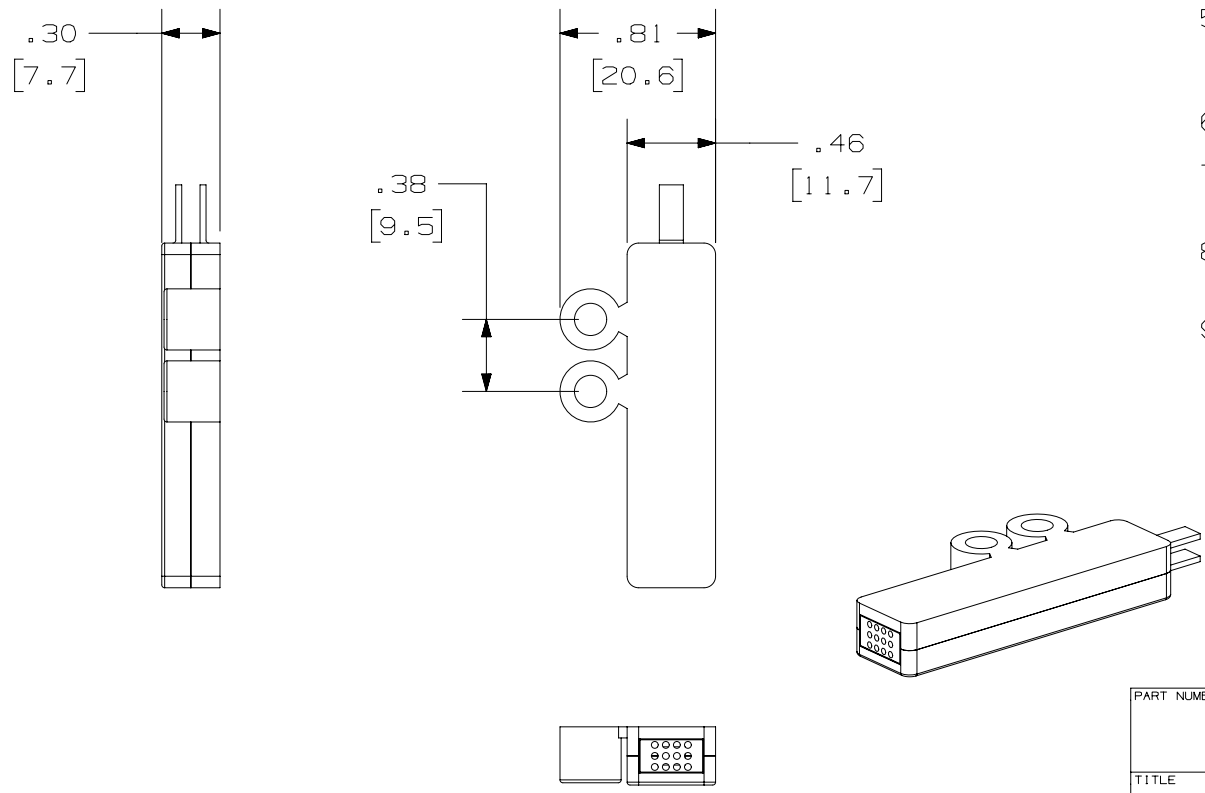



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. SEE WWW.PANDUIT.COM FOR ADDITIONAL INFORMATION.
2. DIMENSIONS IN [] ARE METRIC.
3. MATERIAL:
TUBING: HYTREL
BASE, COVER AND BREAKOUT BLOCK: ABS
4. THE BREAKOUT BLOCK TUBE ASSEMBLY WILL ROUTE 250 MICRON FIBERS INTO INDIVIDUAL, 900 MICRON COLOR CODED BUFFERED TUBES.
5. THE TUBING WILL WITHSTAND A MINIMUM BEND RADIUS OF .51 INCHES (1.3 CM) WITHOUT ANY BREAKS OR KINKS.
6. DOUBLE-SIDED TAPE IS PROVIDED FOR SECURING THE BASE.
7. HEAT SHRINK TUBING IS PROVIDED FOR SECURING THE FIBER CABLE TO THE BASE.
8. 6 TUBING COLOR CODE PER BELLCORE STANDARDS: 1/BLUE, 2/ORANGE, 3/GREEN, 4/BROWN, 5/SLATE, 6/WHITE,
9. 12 TUBING COLOR CODE PER BELLCORE STANDARDS: 1/BLUE, 2/ORANGE, 3/GREEN, 4/BROWN, 5/SLATE, 6/WHITE, 7/RED, 8/BLACK, 9/YELLOW, 10/VIOLET, 11/ROSE, 12/AQUA
10. TUBE LENGTH IS 36".



PART NUMBER		F06CB, F012CB	
TITLE		6 TUBE FIBER FANOUT KIT 12 TUBE FIBER FANOUT KIT CUSTOMER DRAWING	
ITEM REVISION NAME		M00526JA/00	
DATASET FILE NAME		M00526JA_DC/00A	
 THIRD ANGLE PROJECTION			
MATERIAL			
SEE NOTES		00526-04	
DRAWN BY	DATE	CHK	SCALE
JBA	6-29-99		NONE
REV		SHT 1 OF 1	
DATE		A	

A-SIZE CUSTOMER

02A	6/19/17	JSP	JSP	SKH	B. UPDATED TO NEW PART DESIGN.	00526-04
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN