


WeatherProof™ and UnderGround™ Wire Connectors

- Silicone-based sealant protects against moisture and corrosion
- Easy to apply, pre-filled twist-on wire connectors
- UL Listed to 486D for use in damp/wet locations or direct burial
- Handles wire sizes from #20 to #6 copper conductors

WeatherProof™ – suitable for interior and exterior electrical connections exposed to rain or damp conditions.

UnderGround™ – suitable for use in a wide variety of direct burial and wet location electrical connections.

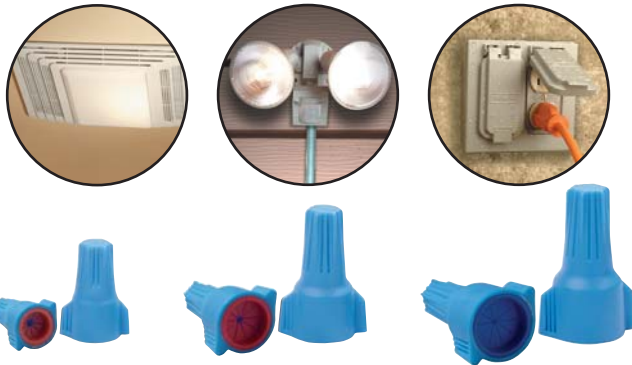


WeatherProof™ Wire Connectors

Model	Color	Wire Combination Range	Wire Combination Range (mm)	Quantity	Cat. No.
61	Blue/Orange	600V* 22 to 14 AWG Min. 2 #20 Max. 2 #14	600V* ,34mm ² to 4,0mm ² Min. 2-,5mm ² Max. 2-2,5mm ²	Card of 6	30-061
				Card of 25	30-161
				Box of 100	30-261
				Box of 1,000	30-361
62	Blue/Red	600V* 18 to 8 AWG Min. 2 #18 Max. 3 #10	600V* ,75mm ² to 10,0mm ² Min. 2-,75mm ² Max. 3-6,0mm ²	Card of 5	30-062
				Card of 20	30-162
				Box of 100	30-262
				Box of 1,000	30-362
63	Blue/Dr. Blue	600V* 16 to 6 AWG Min. 3 #14 Max. 2 #8 & 1 #10	600V* 1,5mm ² to 16,0mm ² Min. 3-2,5mm ² Max. 2-10,0mm ² w/1-6,0mm ²	Card of 3	30-063
				Card of 15	30-163
				Box of 100	30-263
				Box of 1,000 (yellow)	30-363

UnderGround™ Wire Connectors

Model	Color	Wire Combination Range	Wire Combination Range (mm)	Quantity	Cat. No.
60	Blue/Blue	600V* 20 to 10 AWG Min. 2 #20 Max. 1 #10 & 2 #12	600V* ,5mm ² to 6,0mm ² Min. 2-,5mm ² Max. 1-6,0mm ² w/2-4,0mm ²	Card of 2	30-060
				Card of 10	30-760
	Box of 100			30-260	
	Box of 1,000			30-360	
64	Blue/Dk. Blue	600V* 18 to 8 AWG Min. 2 #18 Max. 3 #10	600V* ,75mm ² to 10,0mm ² Min. 2-,75mm ² Max. 3-6,0mm ²	Box of 1,000 (yellow)	30-360Y
				Card of 2	30-064
	Card of 10			30-764	
	Box of 50			30-264	
	Yellow			Box of 1,000	30-364
				Box of 25 (yellow)	30-164Y

*1,000V maximum in fixtures and signs

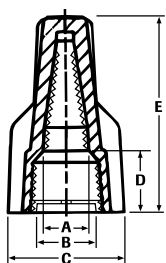

Dimensions (Inches/mm)

Model	A	B	C	D	E
61	3/16 (4,8)	5/16 (7,9)	21/32 (16,7)	13/32 (10,3)	29/32 (23,0)
62	9/32 (7,1)	1/2 (12,7)	15/16 (23,8)	19/32 (15,1)	1-11/32 (34,1)
63	3/8 (9,5)	19/32 (15,1)	1-1/16 (27,0)	23/32 (18,3)	1-19/32(40,5)
60	9/32 (7,1)	17/32 (13,5)	41/64 (16,2)	55/64 (22,0)	1-21/32 (42,0)
64	9/32 (7,1)	19/32 (15,1)	29/32 (23,0)	1-1/8 (28,6)	2-1/32 (51,6)

WARNING:

1. One time use only. Do not reuse.
2. Wiring must comply with all applicable electrical codes.
3. For use on copper wire only. Do not use on aluminum wire.
4. Not for use in continuous submersion applications.