

Type: \_\_\_\_\_  
 Project/Location: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Model No.: \_\_\_\_\_

# MT/MQ/MQM Series

Micro tungsten lamps,  
 micro-quartz lamps  
 or MR16 lamps



## FEATURES


- 6, 12 and 24V with various wattages
- Fire-retardant thermoplastic
- Available with tungsten,
- 300° rotation
- CSA certified to C22.2 No.141-15

See warranty details at: [www.tnb.ca/en/brands/lumacell](http://www.tnb.ca/en/brands/lumacell)



## DIMENSIONS

Dimensions are approximate and subject to change.

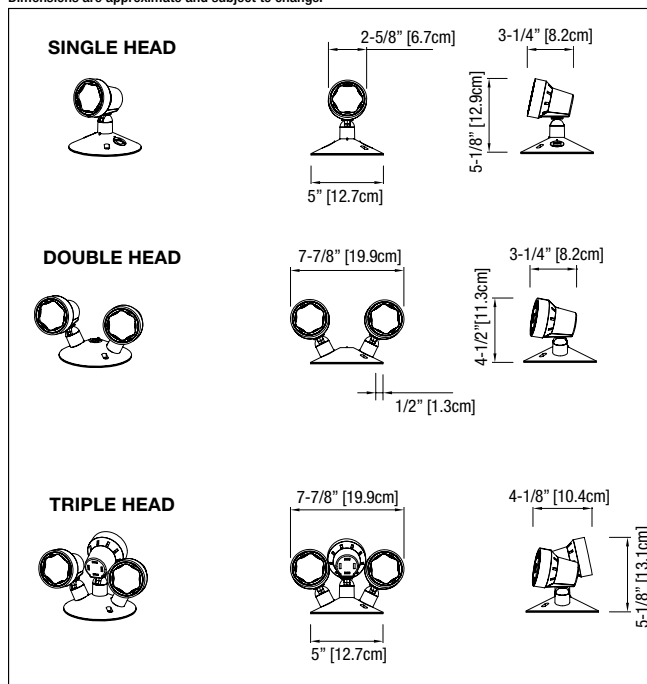

## TYPICAL SPECIFICATIONS

Lamp head and stem shall be injection molded, impact resistant, flame retardant thermoplastic and shall require no tool for aiming or adjustment. The lens shall be inverse concave design and fully adjustable for aisle or area distribution during installation without the need to energize the lamp. Visual identification of distribution shall be provided through position of adjustment pins.

Fixture shall be supplied with a canopy for installation on any four inch octagon box. Housing shall be designed to allow for lamp replacement if required.

The remote fixtures shall be certified to CSA 22.2 No.141-15.

The remote unit shall be the Lumacell® model: \_\_\_\_\_

## WIRE GUARDS

460.0029-L	Wall ceiling Mount
------------	--------------------

## REPLACEMENT LAMPS

MODEL	AC SPECS	DC SPECS
580.0015-L	Halogen (quartz)	12V-12W
580.0097-L	MR16 LED	6V-4W
580.0093-L	MR16 LED	12V-4W
580.0104-L	MR16 LED	24V-4W
580.0098-L	MR16 LED	12V-5W
580.0106-L	MR16 LED	12V-6W
580.0100-L	MR16 LED	24V-6W

See the complete list p. 152-154.

## ORDERING INFORMATION

SERIES	LAMP TYPE	NUMBER OF HEADS	VOLTAGE/WATTAGE/LAMP TYPE	COLOURS	
M= micro, PAR 18	T= tungsten, wedge base Q= halogen, bi-pin QM= halogen, MR16 LED	1= single head 2= double head 3= triple head	LD1= MR16 LED, 6V-4W LD7= MR16 LED, 12V-4W LD9= MR16 LED, 12V-5W LD10= MR16 LED, 12V-6W LD13= MR16 LED, 24V-4W LD14= MR16 LED, 24V-6W 6V6W= MR16 halogen, 6V-6W 6V9W= 6V-9W, wedge base 6V10W= MR16 halogen, 6V-10W 12V12W= MR16 halogen, 12V-12W 24V12W= MR16 halogen, 24V-12W 24V20W= MR16 halogen, 24V-20W	12V9W= 12V-9W, wedge base 12V18W= 12V-18, wedge base 24V9W= 24V-9, wedge base 24V18W= 24V-18W, wedge base 6V8W= halogen, 6V-8W, bi-pin 12V8W= halogen, 12V-8W, bi-pin 12V12W= halogen, 12V-12W, bi-pin	Blank= factory white BK= black

EXAMPLE: MT16V9W