


## Flexible Braid

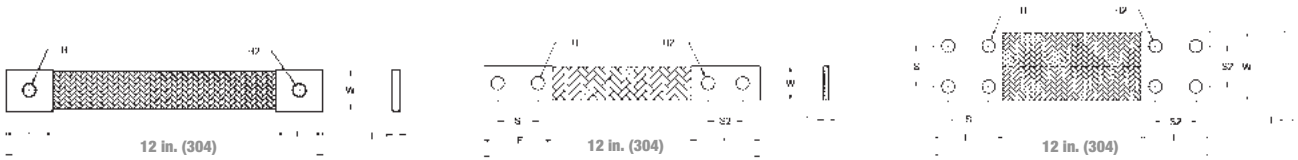

Cat. No.	Circular Mils	Bolt Hole (H or H2)	No. of Braids in Ferrule	Dimensions in. (mm)			
				(T) Thickness	(W) Width	(F) Ferrule Length	(S or S2) Distance Ctr. to Ctr.
<b>FBB12-1*</b>	24000	1/4	1	0.140 (3.6)	0.625 (15.9)	0.750 (19.1)	-
<b>FBC12-1*</b>	48000	7/16		0.148 (3.8)		1.000 (25.4)	
<b>FBD12-1*</b>	76800		0.200 (5.1)		1.250 (31.8)		1.25 (31.8)
<b>FBD12*</b>	76800			2		1.250 (31.8)	1.500 (38.1)
<b>FB2D12-1*</b>	153600		0.250 (6.4)		1.250 (31.8)		2.500 (63.5)
<b>FB2D12*</b>	153600			3		1.250 (31.8)	1.500 (38.1)
<b>FB3D12-1*</b>	230400		0.350 (8.9)		1.250 (31.8)		2.500 (63.5)
<b>FB3D12*</b>	230400			1		1.250 (31.8)	1.500 (38.1)
<b>FBXD12-1*</b>	105600		9/16		0.250 (6.4)		1.250 (31.8)
<b>FBXD12*</b>	105600			2		1.250 (31.8)	
<b>FB2XD12-1*</b>	211200				0.350 (8.9)		1.250 (31.8)
<b>FB2XD12*</b>	211200	3		1.250 (31.8)		1.500 (38.1)	
<b>FB3XD12-1*</b>	316800				0.400 (10.2)	1.250 (31.8)	2.500 (63.5)
<b>FB3XD12*</b>	316800	1		1.250 (31.8)			2.500 (63.5)
<b>FBE12-1*</b>	168000				9/16	0.500 (12.7)	1.250 (31.8)
<b>FBD12*</b>	168000	0.250 (6.4)		1.250 (31.8)			
<b>FB2E12-1*</b>	336000					0.500 (12.7)	1.250 (31.8)
<b>FB2E12*</b>	336000	2		1.250 (31.8)			
<b>FB3E12</b>	504000		0.750 (19.1)			1.250 (31.8)	3.500 (88.9)
<b>FB4E12</b>	672000	1.000 (25.4)		1.250 (31.8)			3.500 (88.9)
<b>FBF12</b>	230400		0.300 (7.6)			1.500 (38.1)	3.500 (88.9)
<b>FB2F12</b>	460800	0.450 (11.4)		1.500 (38.1)			3.500 (88.9)
<b>FB3F12</b>	691200		0.600 (15.2)			1.625 (41.2)	3.500 (88.9)
<b>FB4F12</b>	921600	0.750 (19.1)		1.625 (41.2)			3.500 (88.9)
<b>FBG12</b>	307200		0.380 (9.7)		1.500 (38.1)	3.500 (88.9)	1.75 (44.5)
<b>FB2G12</b>	614400	0.630 (16.0)		1.625 (41.2)		3.500 (88.9)	1.75 (44.5)
<b>FB3G12</b>	921600		0.850 (21.6)		1.880 (47.9)	3.500 (88.9)	1.75 (44.5)
<b>FB4G12</b>	1228800	1.000 (25.4)		1.880 (47.9)		3.500 (88.9)	1.75 (44.5)

\* UL Listed, CSA Certified as Grounding and Bonding Equipment.  
 Special lengths offered in 6, 18, 24, 30 and 36 in. (end to end).  
 Change the 12 in the above catalogue numbers to the desired length.  
 (-1) indicates 1 bolt hole per ferrule.  
 S2 and H2 measurements are used for customized braids only.

### Flexible Braids in a roll (10 feet minimum)\*

Cat. No.	Circular Mils	Thickness (in.)	Width (in.)
<b>FBBRL</b>	24000	0.140 (3.6)	0.625 (15.9)
<b>FBCRL</b>	48000	0.148 (3.8)	1.000 (25.4)
<b>FBDRL</b>	76800	0.200 (5.1)	
<b>FBXDRL</b>	105600	0.250 (6.4)	1.250 (31.8)

\*Ferrules or lugs not included.  
 Add suffix for desired length, i.e.: FBCRL "-10" for 10 ft. roll.